SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1908, by Munn & Co.]

Vol. XCVIII.—No. 17.
ESTABLISHED 1845.

NEW YORK, APRIL 25, 1908.

10 CENTS A COPY
$3.00 A YEAR.

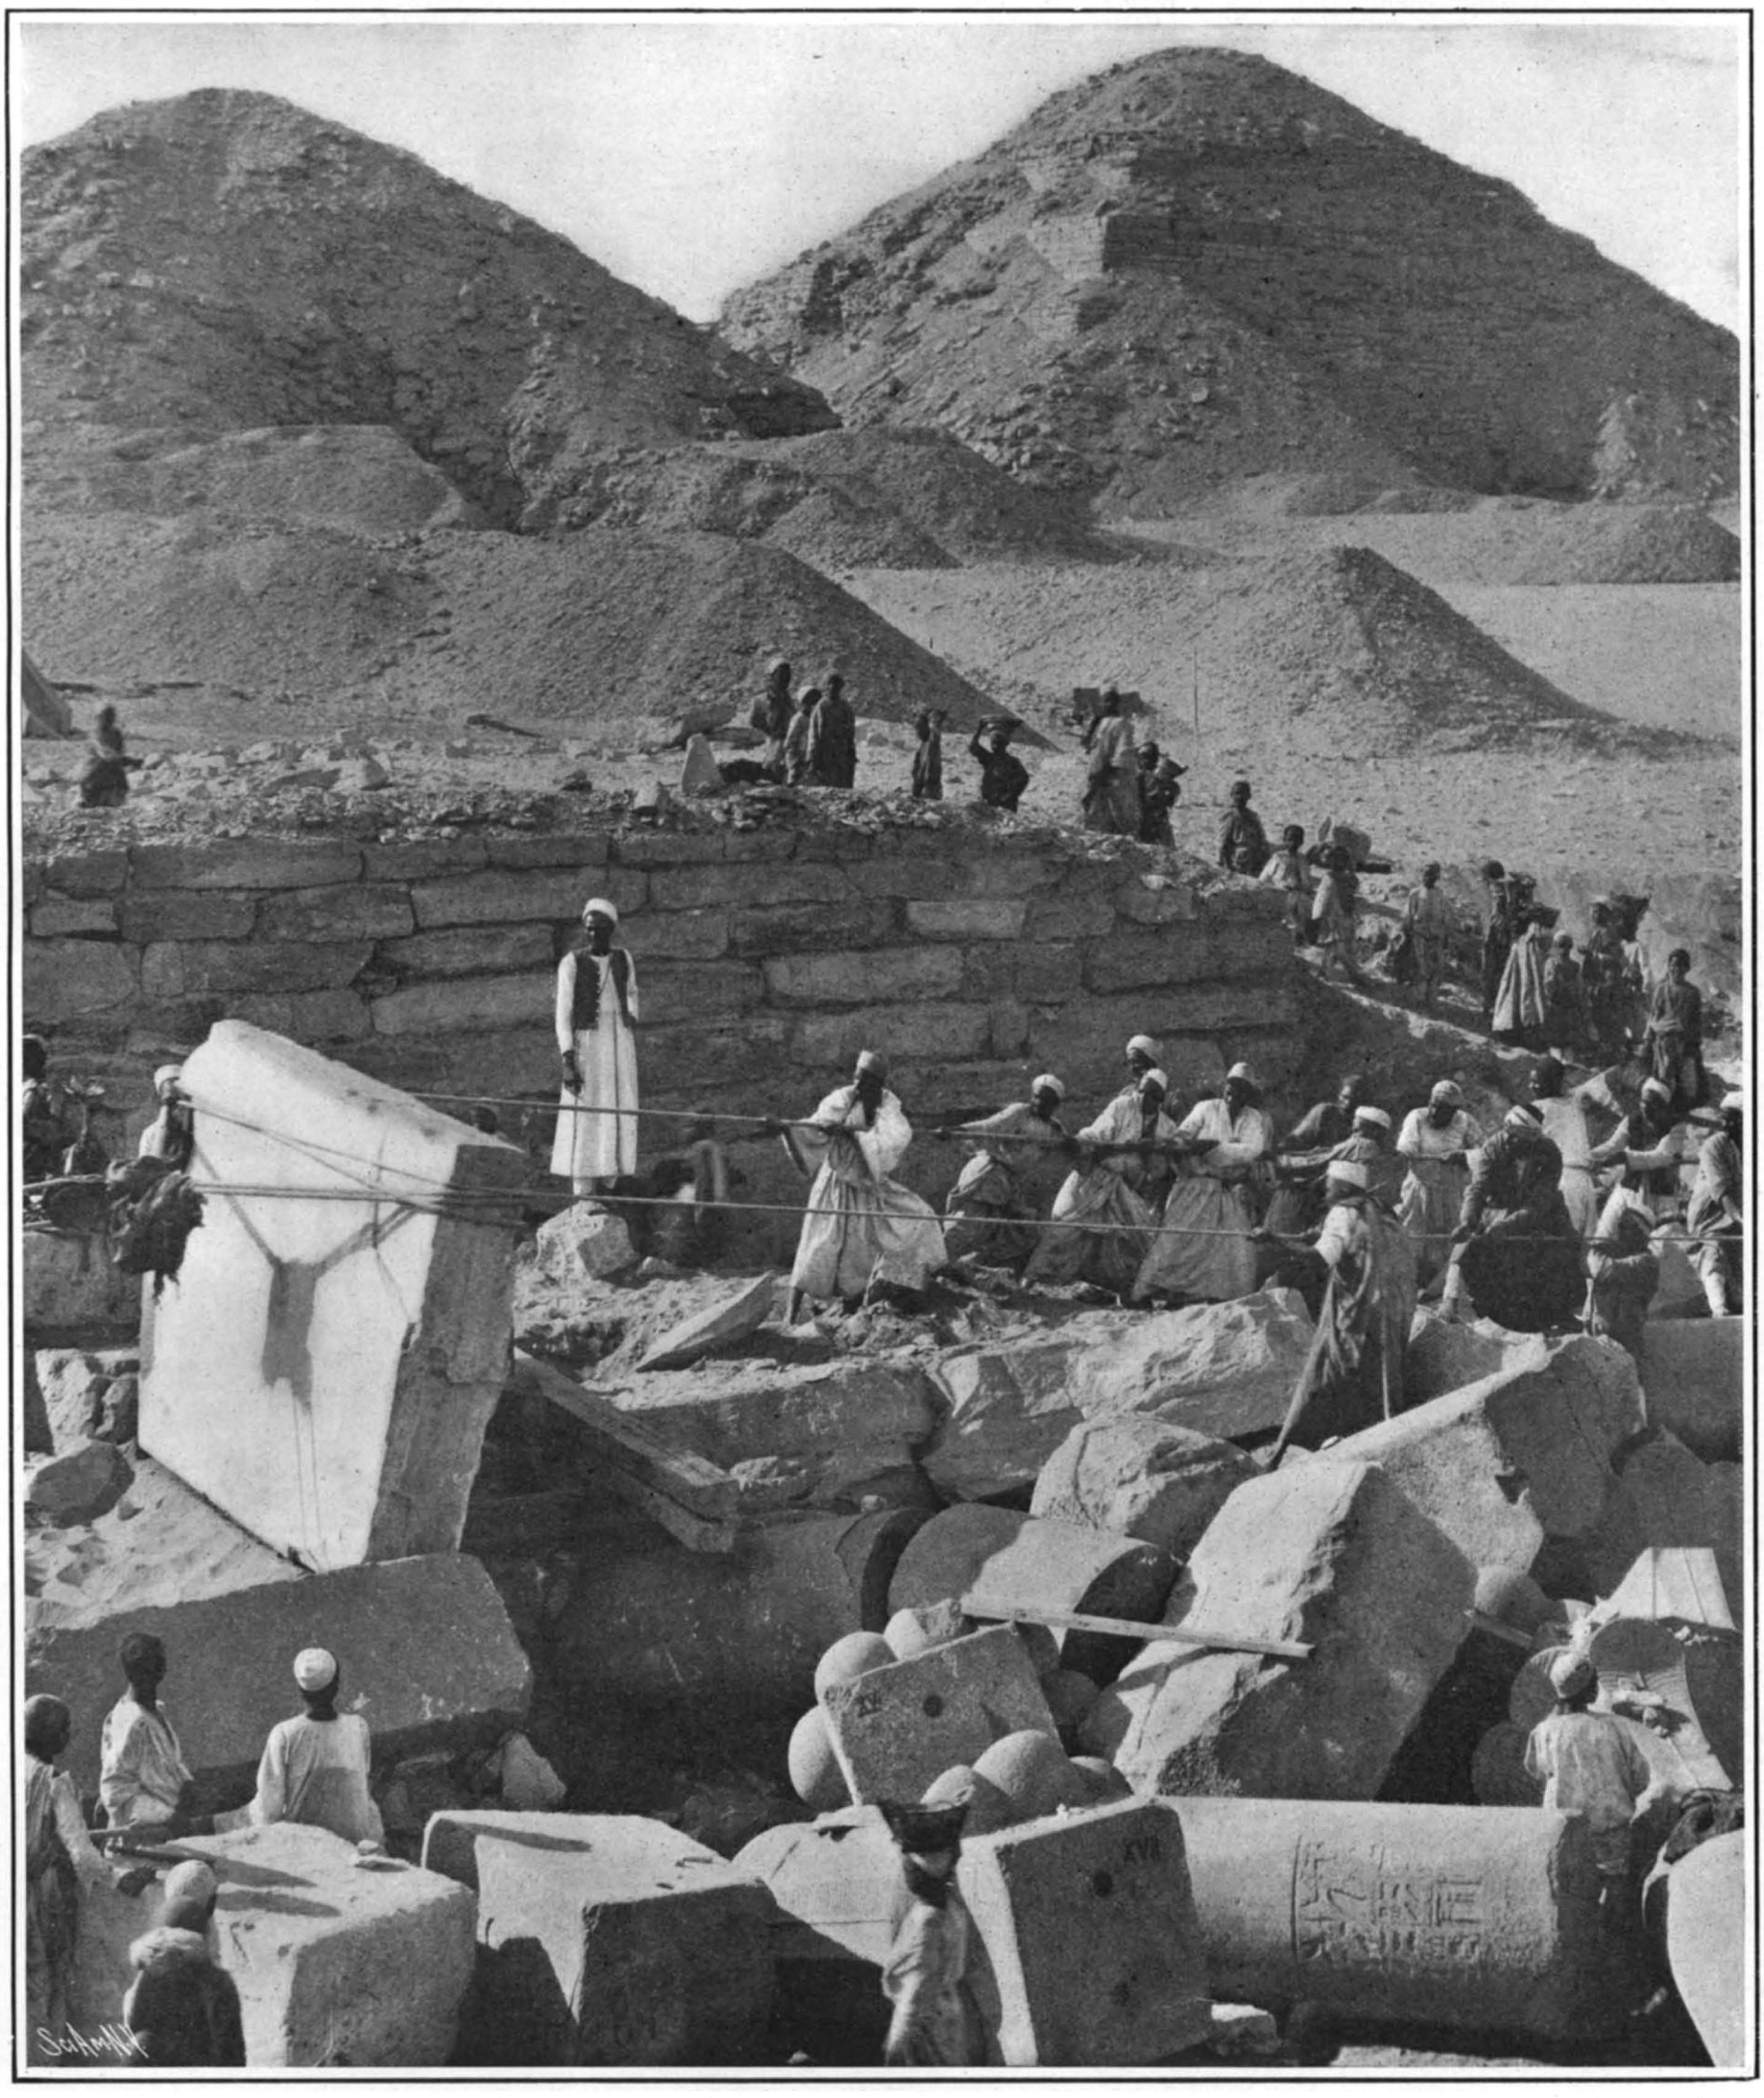

The Ruins of an Arcade in the Temple of King Sahure Near Abusir (About 2500 B. C.)

THE EXPLORATIONS OF THE GERMAN ORIENT SOCIETY.—[See page 293.]

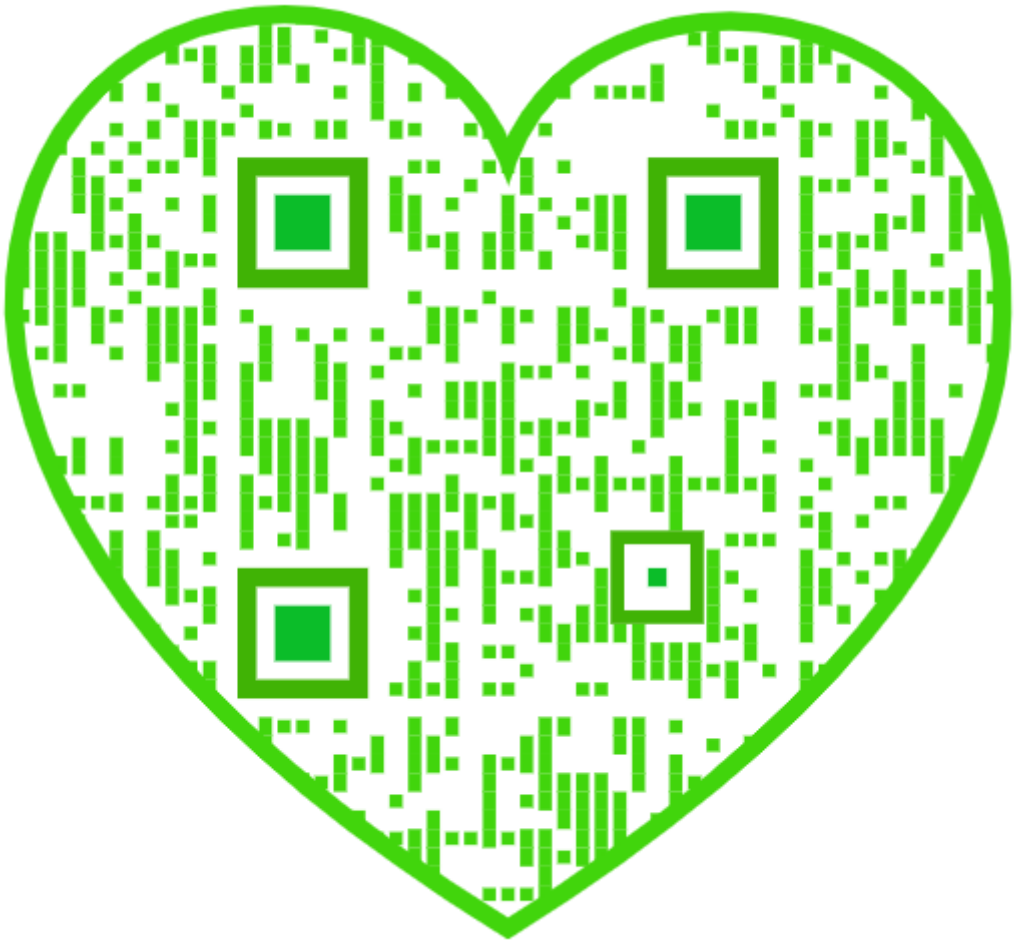

SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN & CO. - - Editors and Proprietors

Published Weekly at
No. 361 Broadway, New York

CHARLES ALLEN MUNN, *President*
361 Broadway, New York

FREDERICK CONVERSE BEACH, *Sec'y and Treas.*
361 Broadway, New York

TERMS TO SUBSCRIBERS.

One copy, one year, for the United States or Mexico $3.00
One copy, one year, for Canada 3.75
One copy, one year, to any foreign country, postage prepaid, 18s. 6d. 4.50

THE SCIENTIFIC AMERICAN PUBLICATIONS.

Scientific American (established 1845) ..... $3.00 a year
Scientific American Supplement (established 1876)..... 5.00 "
American Homes and Gardens ..... 3.00 "
Scientific American Export Edition (established 1878). ..... 3.00 "

The combined subscription rates and rates to foreign countries, including Canada, will be furnished upon application.

Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, APRIL 25, 1908.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are *sharp*, the articles *short*, and the facts *authentic*, the contributions will receive special attention. Accepted articles will be paid for at regular space rates.

REINFORCEMENT OF THE BROOKLYN SUBWAY TUNNELS.

In view of the popular distrust of the Subway tunnels to Brooklyn, which was aroused at a certain period during their construction, a distrust which it took several weeks of successful operation to dissipate, we present some details of the method of strengthening the tunnels during construction, which should be sufficient to satisfy the public once and for all not only that the tubes are "safe" but that they are stronger than as originally designed.

The irregularity in the grades of a certain part of the tunnel and the deformation of the cast-iron shell were caused by faulty control of the shield in the process of driving, coupled with an undoubted weakness of the cast-iron tube for the stresses it was called upon to sustain when it entered the loose material below the river. The irregularities of grade and weakness of the shell were, fortunately, capable of correction; and the engineers of the Interborough Company spared neither time nor expense in repairing the defects and putting this portion of the tubes in first-class condition. To prevent any tendency of the tubes to sag in the direction of their length, 20-inch steel-and-concrete piles were sunk, in pairs, at 30-foot intervals longitudinally of the tube, the piles being carried down to solid rock or other firm material. The grade was corrected by enlarging the tunnel at the top or bottom, as might be required, until a perfectly true grade was established. An immense amount of work was done also to strengthen the tubes against distortion where they passed through the soft material. The concrete lining was here made thick enough to extend 3 inches beyond the flanges of the lining plates, and it was specially increased in thickness at the top of the tunnel and the sides, by making the outline flat instead of circular at these places. Inside of this extra concrete and around the top of the arch for a distance of 120 degrees circumferentially, there were imbedded three 1¼-inch round rods to each segmental ring of the tubes. Also, at the top of the tunnel there were imbedded sixteen longitudinal 1¼-inch round rods connected at their ends by turnbuckles. A similar number of circumferential rods were imbedded in the bottom concrete of the tubes. On each side of the tubes, lapping the circumferential rods at the top and bottom, were placed two 1-inch square rods to each ring. It will be seen that the cast-iron lining of the tunnel is thus reinforced by what is practically a second shell of steel and concrete. So closely assembled are the steel bars and rods, that in some cases the concrete had to be put in place by hand, and extreme care was taken to secure a thorough bond between the materials. Whatever grounds for anxiety may have once existed as to the stability of the tunnel have by these precautions been entirely removed.

THE PANIC AND THE RAILROADS.

Few people who are not directly connected with the railroad interests of this country appreciate how seriously they were affected by the panic at the close of last year. It came at a time when the development of our railroad system, in the extent of its mileage, the magnitude of its rolling stock, and the enormous extent of its freight and passenger traffic, had reached a point that was undreamed of a few years ago, even by our most optimistic railroad men. In spite of the fact, as shown by the Interstate Commerce Commission reports, that there were over 223,000 miles of line in the country served by nearly 2,000,000 freight cars of 70,000,000 tons aggregate capacity, there was no little anxiety lest another car famine, similar to that of a few years before, should occur. In the closing months of last year, however, the tide of new construction and increasing freight and passenger traffic was suddenly halted and commenced to swiftly ebb—how swiftly is shown by the fact that at the opening of the present year there were over 300,000 idle freight cars on the various railroads, while the returns made to the Interstate Commerce Commission reveal that, in the last three months of 1907, while the ratio of expenses to earnings had risen from 67 per cent to 76 per cent, there had been a decrease of earnings per mile of 31 per cent. According to an estimate of Mr. S. Thompson, prepared for the General Managers' Association of Chicago, there were recently about 340,000 railway employees out of work, whose idleness directly affected, probably, not less than 1,500,000 people. On the other hand, it is gratifying to learn from a statement issued by the Chief of the Bureau of Immigration that, as the result of several hundred thousand inquiries sent out by his office, to determine the present industrial conditions and the probability of demand for labor, he found in almost every industrial center and particularly in the farming districts signs of a steady return of activity and the probability during the next few months of a steadily increasing demand for labor.

REPORT ON THE QUEBEC BRIDGE DISASTER.

Probably no great engineering disaster has been made the subject of such an exhaustive inquiry as the fall of the Quebec Bridge. For five months the Royal Commission of Inquiry was continuously engaged in its investigations, and the report which has recently been made public is one of the most voluminous and valuable documents of the kind ever presented. In the current issue of the SUPPLEMENT will be found a lengthy summary of the conclusions reached by the Commission, which finds that the collapse of the bridge was due to the failure of the lower chords in the anchor arm, near the main pier, and that the failure of these chords was due to their defective design. The stresses that caused failure did not result from abnormal weather conditions or accident, but were such as might be expected in the regular course of erection. The work done by the bridge company in making the detail drawings, in planning and carrying out the erection, and in fabricating the material was good, and the steel used was of good quality. The Commission finds that the failure cannot be attributed to any cause other than errors of judgment on the part of the designing and the consulting engineers connected with the construction of the bridge; although they state that these errors of judgment cannot be attributed either to lack of common professional knowledge, the neglect of duty, or to the desire to economize. The ability of the two engineers was tried in one of the most difficult professional problems of the day, and proved to be insufficient. The Commission considers that the specifications were not satisfactory, the unit stresses employed being higher than any established by past practice. A grave error was made in assuming the dead load at too low a value. This error alone was of sufficient magnitude to have required the condemnation of the bridge, even if the details of the lower chords had been of sufficient strength; for the actual stresses in the completed bridge would have been considerably greater even than the high stresses permitted by the specification. There is one clause which will be of particular interest to bridge engineers, and we are inclined to think will call forth no little protest. This occurs toward the close of the report, where the Commission states that the professional knowledge of the present day concerning the action of steel columns under load is not sufficient to enable engineers to economically design such structures as the Quebec Bridge. Now, although the SCIENTIFIC AMERICAN is free to admit that our knowledge of the strength of large steel compression members is not as accurate as might be desired, we are satisfied that, if the weight of steel which was used in the bottom chord member that failed had been built up in a form better adapted to resist compressive loads, the bridge would have been standing to-day—though subjected, of course, to higher stresses than are sanctioned by the best modern practice.

URGENT NEED OF FOREST PRESERVATION.

We direct attention to the article on another page of this issue describing the practical work of the Bureau of Forestry. That the case is urgent is shown by the estimate made by the Forest Service of the United States that, at the present rate of consumption, and taking no account of renewals of growth, which require on an average about thirty-five years, the timber supply of this country will be totally exhausted in fourteen years. This is based on an estimate that the total stand of timber in the United States is 1,400 billion and that the annual use of timber to-day is one-fourteenth of this amount or 100 billion feet. The Forest Service is directing its efforts to the preservation of this timber supply by creating national forests and disseminating information as to the best way in which forest resources may be utilized. According to Mr. Herbert M. Wilson, of the United States Geological Survey, the great hope for the preservation of our timber supplies lies in teaching the people how to scientifically manage the forest and prevent waste; and he summarizes the method to be adopted as follows: The putting to use of every part of each tree that is cut; the stopping of forest fires; the prevention of wasteful bark cutting, and the employment of means to preserve the life of the timber after cutting in the various uses to which it is put. It is encouraging to learn that prompt action, such as is being encouraged by the Bureau of Forestry, may place this country in an even better position than European countries, whose forest resources were practically depleted before remedial measures were taken. It is also expected that the rapidly-extending use of concrete in place of wood will serve as a powerful agent in preventing the extermination of our forests.

THE BRITISH NAVAL PROGRAMME FOR 1908.

Though the naval appropriation made by the British government for the year 1908 represents a slight increase upon the estimate of last year it is considerably below what it was four years ago, which marked the high-water mark in British naval production. For the current year the total sum to be devoted to naval purposes is $161,597,500, of which $37,726,010 is to be expended upon new construction. The new programme, which in the words of the First Lord of the Admiralty is "exceedingly modest," comprises the building of one battleship of the improved "Dreadnought" class, one large armored cruiser, six fast protected cruisers, sixteen torpedo-boat destroyers, and a number of submarines to the estimated value of $2,500,000. In regard to the latter the Admiralty has entered upon a new policy, that is the construction of this class of craft in the government dockyards, the object being thereby to keep a check upon private contracts. Moreover the department has come to an arrangement with the leading armor-plate manufacturers whereby a considerable reduction in the price of armor has been effected and this development will exercise an appreciable reduction in the cost of warship construction.

Though only one vessel of the "Dreadnought" class is to be laid down during the present year the British Admiralty has already, including vessels of the "Lord Nelson" and "Agamemnon" class which coincide with the all-big-gun type of warship, nine of these vessels launched, while three are in course of construction and two more are authorized, making fourteen units of this type in all.

Between April 1, 1907, and March 31, 1908, twenty-six warships have been completed and placed in commission. These comprise one battleship ("Lord Nelson"), three armored cruisers, three torpedo-boat destroyers of the new ocean-going 33-knot turbine type, ten torpedo boats of the coastal class, eight submarines, and the repair ship "Cyclops." At the present time there are also building sixty further vessels—seven battleships, four armored cruisers, one unarmored cruiser, ten torpedo-boat destroyers, twenty torpedo boats, and eighteen submarines.

The present government is continuing the general lines of the policy of the former administration, the results of which are now commencing to bear fruit. The nucleus-crew system has proved highly satisfactory and is to be continued. Under this arrangement the chief executive officers and more important ratings are always on board the vessels when out of commission. From time to time the full crews are made up and are subjected to a course of sea-going practice, while the machinery and boilers are always maintained in first-rate condition. The result is that such vessels are always ready for instant mobilization, and the wisdom of this arrangement has been strongly exemplified during the past few months, when vessels with such nucleus crews have been suddenly called out for an emergency and have been able to reply to the summons with the minimum of delay.

In regard to the establishment of the new dockyard at Rosyth on the east coast of Great Britain, $17,250,000 is to be devoted during the current year toward the construction and equipment of this strategical point. The property acquired aggregates 1,184.2 acres with 285 acres of foreshore. A superintendent engineer was appointed for the purpose of studying the various great dockyards throughout the world together with their equipment, so that Rosyth might be replete with the most modern appliances and when completed constitute the finest and largest naval port extant. As a result of his investigations a general scheme has been drawn up in such a manner that any section or sections might be carried to fulfillment at once without interfering with the general aspect of the whole idea. The Admiralty proposes to push forward with the construction of a great graving dock, closed basin, and an entrance lock with a depot for

submarines, destroyers, and oil storage, as liquid fuel is to be so extensively adopted in the navy in future. The basin is to have an area of 52.5 acres, with accommodation for eleven of the largest warships along the quays, and twenty-two when double-banked. Special attention has been paid to the rapid strides that are being effected in naval design, and the dockyard is being constructed rather with a view to future requirements than to present-day exigencies. The present appropriation is intended to cover the cost of the necessary pier constructional work, the contract for which is to be shortly let and which it is anticipated will be completed in ten years.

DELAGRANGE'S RECORD AEROPLANE FLIGHT.

On April 11 M. Delagrange, the French sculptor who has been experimenting latterly with an aeroplane which is practically a duplicate of M. Farman's machine, is said to have made a circular flight of about 4½ miles above the parade ground of Issy-les-Moulineaux, near Paris.

Following a triangular course, the aeroplane touched ground twice in the first two rounds, but made the last 3 miles in 6½ minutes without touching and at a height of about 12 feet. The flight lasted 9¼ minutes, and is said to have been terminated on account of M. Delagrange becoming fatigued from operating so continuously the horizontal rudder. The two rudders of his aeroplane are controlled by a single steering wheel. This wheel is turned in one direction or the other to operate the vertical rudder and steer the aeroplane to the right or to the left, while by pushing forward or pulling backward on the wheel, the horizontal rudder is moved, and the machine made to rise or fall. While in flight, it is necessary for the aviator to constantly manipulate the horizontal rudder, in order to keep the machine at a fairly even height above the ground. The working of this rudder is rather an arduous task, besides being a great strain upon the nerves of the operator. It is interesting to note that the flight was terminated for the cause stated, and not on account of the overheating of the motor, which has been the cause of the termination of most of Farman's flights. The Delagrange aeroplane is fitted with a radiator and pump for properly cooling the water, and it is doubtless on this account that it was possible to accomplish so long a flight. The experience of M. Delagrange shows that some better way of operating the horizontal rudder must be provided, or better still, that a machine which is automatically stable must be built before very long flights are accomplished. It has also brought out the fact that the operation of a flying machine is no child's play, but a very great strain upon the nerves and muscles of the aviator. The covering of so long a distance after but very little practice was quite unlooked for, and only goes to show how very near the solution of the problem we are at the present time.

IMPROVEMENT OF THE AMERICAN MERCHANT MARINE.

BY WILLIAM P. MUNGER.

In 1905 Admiral Dewey, in a letter to the Secretary of the Navy, gave twenty good reasons why, as viewed from a military standpoint alone, the merchant marine of the United States should be augmented. After commenting on the deplorable condition of our merchant marine, showing the difficulty of getting auxiliary vessels at the outbreak of the late Spanish war, pointing out that the embarrassment would have been still greater if the operations of war had been more unexpected and against a more active enemy, describing the negative support that would be and is given the navy by the merchant marine, he remarks that another benefit accruing to the navy from a larger fleet of American-owned merchant vessels would be a large number of experienced seafaring men, forming a valuable reserve with which to man auxiliaries.

We are now carrying 8 per cent to 12 per cent of our exports and imports in American bottoms, which means that we are intrusting our rivals with the delivery of our goods. Can we expect our rivals to be as careful in handling or as prompt in delivering our goods as their own? The testimony of the manufacturers of the entire country before the Merchant Marine Commission of 1906 shows that American merchants find it hard to get into the South American markets, and harder still to stay there; for they can never depend upon the starting of English and German vessels. The American mails must cross the Atlantic twice on the subsidized liners of England. The result is the inevitable one. We have lost our hold upon South America. Likewise our prestige has been and is being lowered in the Orient and the Occident.

Among the various plans which have been proposed to strengthen our merchant marine, the following stand out as the most often discussed: Free ships, discriminating duties, bounty to ship owners building ships, larger compensation for carrying mails, and subsidy.

Free ships mean (1) free trade, because that method allows all materials entering into the construction or repair of ships engaged in foreign trade to be imported free of duty. The objections to this are: First. That all materials entering into the construction or repair of ships are now, by the provisions of the Dingley law, upon the free list; and this method has not built up our merchant marine. Second. That this policy would not help the merchants to pay increased running expenses after ships were built. (2) The building of ships in a foreign country and putting them under the American flag. This is a bad policy, because, even if the ships were just as well built, American labor would be deprived of all that work and pay.

Discriminating Duties.—The objections to the policy of (1) remitting to consignees a certain percentage of the duties upon goods if imported in American bottoms, or (2) of imposing an additional duty if carried in foreign bottoms, or (3) of so modifying the tonnage tax laws that American ships would pay less tax than those of a foreign nation, are: First. It would not benefit our very large export trade. Second. It would necessitate the abrogation of thirty commercial treaties, and to secure thirty more as favorable would be an almost impossible task. Third. The probability of retaliation by other nations is far too serious a risk to be taken. Fourth. The quantity of goods on each voyage would vary, and the ship owner could not be sure business would be sufficiently remunerative to warrant him in building and running vessels under this plan. Fifth. It is not general in application, as many of the ports that we wish to make our free trade ports, or the articles carried, are now on the free list.

Bounty to Ship Owners Building Ships.—This plan, in its best form, advocates the payment of a bonus to ship owners when new ships are commissioned from American yards, this amount bringing the net cost down to the foreign builder's figures. This plan would in no way bring down running expenses to the low figure of the heavily-subsidized foreign merchant marine. It would be like deserting a child at its birth.

Larger Compensation for Carrying Mails.—Mail subventions tend to build up fast steam lines with little cargo capacity, and to increase the compensation would probably drive our already too few steam "tramps," the large and slow cargo sailing vessels, and the deep-sea fishing vessels out of business.

Subsidy is an equalization to ship owners for the yearly loss sustained by the increased cost of running under the American flag, the American laws requiring better housing and better food for the crew than the laws of foreign nations. The forms which a subsidy plan usually assumes are: (1) A direct payment to ship owners per ton of freight per mile. (2) A direct payment per registered ton-mile. (3) A direct payment per gross ton-mile. (4) A payment based on the number of days the vessel is engaged in foreign trade.

1, 2, and 3 would not be applicable to deep-sea fishing boats, while No. 4 puts the American ship in a position to compete with the foreign ships, all of which have lower operating expenses. But it does not help the ships to spring into existence. As none of the above will by itself solve the problem, there is proposed, as a composite measure:

(1) A bounty paid to ship owners building ships of 40 per cent of the gross cost of all ships built for the foreign trade the first year, 30 per cent on all built the second year, 20 per cent on all built the third year, 10 per cent on all built the fourth, and none thereafter. This plan would enable American capital to secure ships as cheaply here as abroad. Since American workmanship excels, this would create a demand for American ships, and give work to American shipyards and jobs to American labor. The more ships that are built, the more thoroughly organized the shipyards would become, and hence the lessened cost, and hence the diminishing rate of bounty.

(2) A greater mail compensation paid to lines of fast American mail steamers, all of which must come up to specified tests as to speed and adaptability to government uses in war. Besides supplying the extra vessels needed, this plan would be a means of opening new trade with South America, Africa, etc.

(3) Subsidy to cargo vessels and deep-sea fishermen to equalize the running expenses of that class of vessels. The number of months that a vessel has been in service is the basis on which the following subsidy should be granted:

Period of time in Service.	Subsidy Earned.
12 months of one year.....	$5.00 per registered ton.
9-12 months of one year.....	$4.00 per registered ton.
6- 9 months of one year.....	$2.50 per registered ton.

Any one vessel to receive only one of the above bounties, and to be at the disposal of the government (for a prescribed consideration) in case of war.

(4) Naval Volunteer Retainers.—Foreigners would flock to secure the superior American food and treatment, and then when the war clouds hung over the United States, would go back to their own government, and leave us with our pick of vessels, but without trained citizens to man them. Therefore, it is proposed that "naval volunteers" be required on each outward passage, and an increasing percentage of these as members and apprentices of each crew until at least 50 per cent are such men, such persons to receive from the government each year as compensation for willingness to serve in case of war a sum which varies from $100 for masters and chief engineers to $15 for boys.

These schemes will cost, and who will pay?

There is at present a tax imposed on the tonnage of any vessel for entering (except in distress) any port the world over. This is generally limited to the first few entries each year. In the United States the money thus derived ($862,840) goes into the nation's treasury to be spent for irrigation, or Indian reservation, or other lay purposes. Postmaster-General Meyer, in January, 1908, directs our attention to the fact that the net profit from the ocean-mail service in the last fiscal year was $3,637,226.81.

In all fairness, incomes thus obtained should be used to aid the struggling industry under consideration; and, as the tonnage dues of the United States are the lowest in the world, as a partial offset to the proposed expense an advance of 10 cents per registered ton is suggested for each arrival of any vessel from nearby foreign ports, not to exceed $1 per ton in any one year, and 20 cents per registered ton for each arrival from a distant foreign port, not to exceed $2 per ton for any one year. The net profit on ocean mail should revert to the fund.

In 1905 there were only 92,786 gross tons built on the seaboard, not over 25,000 tons were designed or even could be used.

The naval volunteer idea being entirely new in America, it is probable that not more than 3,000 men would be enrolled the first year; that there would be a total enrollment of 6,000 the second year, 8,000 the third year, and 10,000 the fourth, which would presumably exhaust the available supply of material, based on Great Britain's example. In round numbers, there would be an average profit of $4,000,000 a year from the ocean mail service, and this would increase as better service was offered; and the tonnage tax would afford $4,500,000 per annum.

If the above plans were adopted, the American people would make a profit, secure lower freight rates, and secure following beneficial results:

1. Ten thousand naval volunteers available in case of war. 2. A new fleet of from 200,000 to 300,000 tons of steel mail steamships, and a naval reserve needed by the country as shown by the report of Admiral Dewey. 3. A net addition of our cargo and fishery tonnage of 5,300,000 tons, increasing fourfold the actual ocean shipping of the United States, and enabling us to carry not 10 per cent, but 30 per cent or 40 per cent of our own exports and imports. 4. The creation of ten regular new or strengthened steamship lines, creating new outlets for American products. The burden of this would be borne in a large part by the foreign ships which have disintegrated and now monopolize the American merchant marine.

A NEW PROCESS IN MILLING.

A new process in milling, by which the phosphates and other essential mineral salts are retained and a good merchantable white flour produced, has been devised by Mr. F. C. Ireland, a food expert.

The flour produced by this new system of milling is uniform in quality, whether made from old or new wheat. The bakery shows a yield of 20 per cent more bread and of a more nutty flavor and certainly of greater hygienic value than bread made of any flour under the old system. In this new system no chemicals whatever are used in the process. The flour has a slight yellowish color owing to the retention of the phosphates and other mineral salts, which are all or nearly all refined out of the white flour by the system now in use.

In this new flour the starch, gluten, nitrogen, carbon, calcium, sulphur, sodium, iron, potassium, and magnesium are retained. All these essential constituents, found naturally in the wheat, are so consolidated together and in such a manner that the very best refining machinery, while useful in removing the bran, which is a substance of straw, cannot remove the mineral salts mentioned. They are left in the flour, no matter how fine it is made.

Hellum Not Solidified.

Prof. Dewar, who recently made the announcement that helium had been solidified by Prof. Ohnes, of Leyden, now admits that a mistake has been made. Prof. Ohnes discovered that his helium contained a slight admixture of hydrogen which accounted for the solidification.

When the oxides of nitrogen have been separated from the mixture which is formed by electrical discharge in air, it is important to cool the mixture of the gases in order that dissociation may be avoided. To do this H. Pauling, in a recent American patent, proposes to effect the cooling by introducing an already cooled mixture of the gases into the hot gases, instead of using an inert gas for this purpose.

COMBINED MUTOSCOPE AND TALKING MACHINE.

There are certain inventions of so common-sense a character that they immediately suggest the question, Why was not that thought of before? There is a natural relationship between phonographs or kindred machines and moving picture apparatus, since they both give a reproduction of life, though appealing to different senses. What could be more logical than to combine the two machines so that one would complement the other? This has just been done by Mr. L. P. Valiquet, of Newark, N. J., in the manner shown in our engraving. It is Mr. Valiquet's opinion that phonographs have about reached the acme of their popularity and many are beginning to tire of them, and that by adding the mutoscope feature there will be a revival of interest in the instruments and their popularity will receive a new boom. With this in view he has so designed the apparatus that the mutoscope attachment may be fitted to any standard phonograph either of the disk or of the cylinder type.

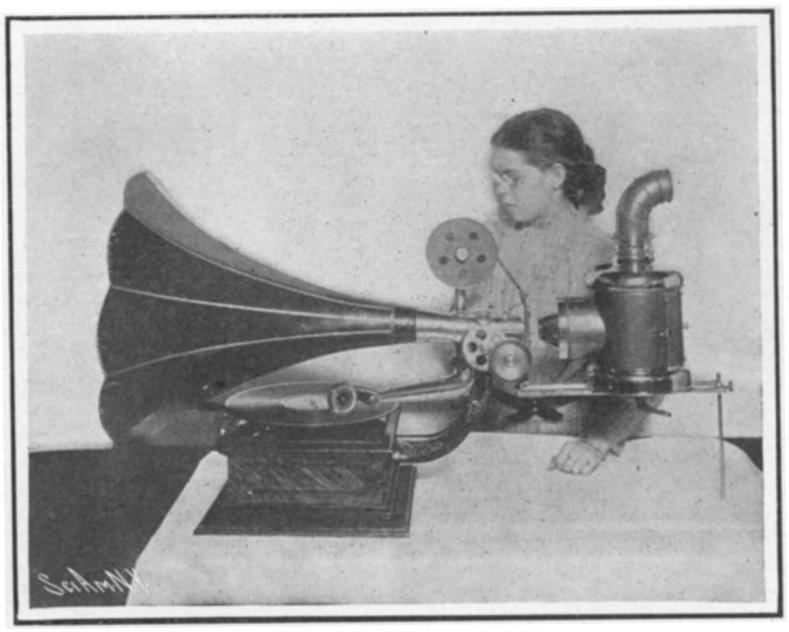

A COMBINED MUTOSCOPE AND TALKING MACHINE.

Our illustration shows a disk machine fitted with the moving picture attachment. The pictures are projected through the horn of the instrument. The usual elbow to which the horn is applied is removed and in its place a tubular tee is provided. In the forward end of this member the horn is secured. The member is also provided with the mechanism for operating the reel of pictures. The film is coiled up on a reel mounted above the tee tube and passes over the rear end of the tee to a take-up reel below. The film is moved past the end of the tee by operating a hand crank which actuates the necessary gearing to multiply the speed of travel. The gearing also actuates a shutter which vibrates up and down so as to interrupt the exposures in the usual manner. The lantern is mounted on a pair of horizontal bars which project to the rear and are supported at the extreme rear end on an adjustable vertical standard. Either gas or electricity may be used to furnish the light. It will be noted that the talking machine is unchanged with the exception that the elbow is replaced by the tee tube. The instrument thus combined is called a "photophone" and should furnish much entertainment, as the audience, whether in the home on in a public hall, will be able to see and hear at the same time a comic performance, operatic production, and the like. We are informed that a large number of special films and records have been prepared with a special view to providing an entertaining combination of music or conversation with moving pictures.

The cylinder machine is similar in most respects to the disk machine, with the exception that a flexible connection is provided between the horn and the stylus so that the horn may remain stationary while the stylus travels from end to end of the cylinder.

A SIMPLE APPARATUS FOR GENERATING HYDROGEN.

BY PROF. GUSTAVE MICHAUD, COSTA RICA STATE COLLEGE.

Broken pieces of aluminium table or kitchen ware can be used for several interesting chemical experiments. The following is a simple one: Buy from a druggist a foot or two of rubber tubing, a stopper with a small glass tube running through it and a few ounces of caustic potash or soda. Select a bottle to match the stopper and in it place the broken pieces of aluminium. Pour over them some lukewarm water and add a few spoonfuls of caustic soda. (This chemical is not so dangerous to handle as sulphuric acid, yet contact with the skin should be carefully avoided.) An effervescence will at once take place and will last for several hours in spite of the fact that the liquid is no longer lukewarm.

Hydrogen gas will be generated, escaping through the rubber tube, and the gas may be used for any of the experiments described in books on chemistry. It should not be ignited directly at the end of the tube unless fully a quarter of an hour has elapsed after the beginning of the effervescence. *Disregard of this caution might cause an explosion on account of the oxygen left in the bottle.*

A given weight of aluminium displaces almost four times as much hydrogen as is evolved by the same weight of zinc, and some day, therefore, aluminium will be used instead of zinc for the industrial preparation of hydrogen. The method is at present more expensive than the ordinary zinc-and-acid process, yet it should be given the preference in several cases on account of the following two points of superiority:

1. The gas is free from hydrogen arsenide, hydrogen sulphide, and acid vapors. Its greater purity becomes especially apparent when it is used to inflate soap bubbles. With the classical apparatus the experiment cannot be made unless the gas is purified after leaving the bottle, because the acid vapors it carries along break the bubbles long before they reach any considerable size.

2. The apparatus is simpler and the operation easier than in the case of the zinc-and-acid process. There is no need of a Wolff bottle with a contrivance for the gradual addition of small amounts of one of the reagents. All the needed alkali is placed in the bottle at the outset, and the gas is generated continuously and regularly until the last bit of aluminium has disappeared.

A SIMPLE APPARATUS FOR GENERATING HYDROGEN.

CONVERTIBLE MILITARY TRANSPORT MOTOR WAGON.

BY OUR ENGLISH CORRESPONDENT.

The vehicle pictured in the accompanying engraving is expressly designed for military purposes for the transport of troops, or for the conveyance of baggage, stores, ammunition, etc. The conversion from one type to the other is effected in a few seconds, and if so desired, one-half of the wagon can be arranged to accommodate passengers, the other half being available for freight. The most important feature of the design is that no extra parts are required to convert it from one type of vehicle to the other. The seats are so arranged transversely that the passengers all face in the direction in which the car is traveling. Steel standards are fixed at each side, and on these the seats rest, the latter being made in two parts hinged together, one part forming a back rest, while when used as a baggage wagon, these standards serve as supports to the sides.

When it is desired to convert the vehicle from a passenger into a baggage wagon, the seats, which are portable, are lifted out and used to build up the sides of the vehicle. The necessary fastenings for securing the sides are already fitted, so that the complete change can be effected within two minutes. An important feature in the designing is that the seats are exactly half the length of the space which is required to be filled so as to change from passenger to baggage wagon. The seats have an over-all width of 15½ inches, with a similar clear space between each. Five rows of seats are available when the wagon is exclusively used for passenger purposes, and this provides accommodation for twenty-five men. Suitable clips are provided on the back of each seat for the housing of rifles.

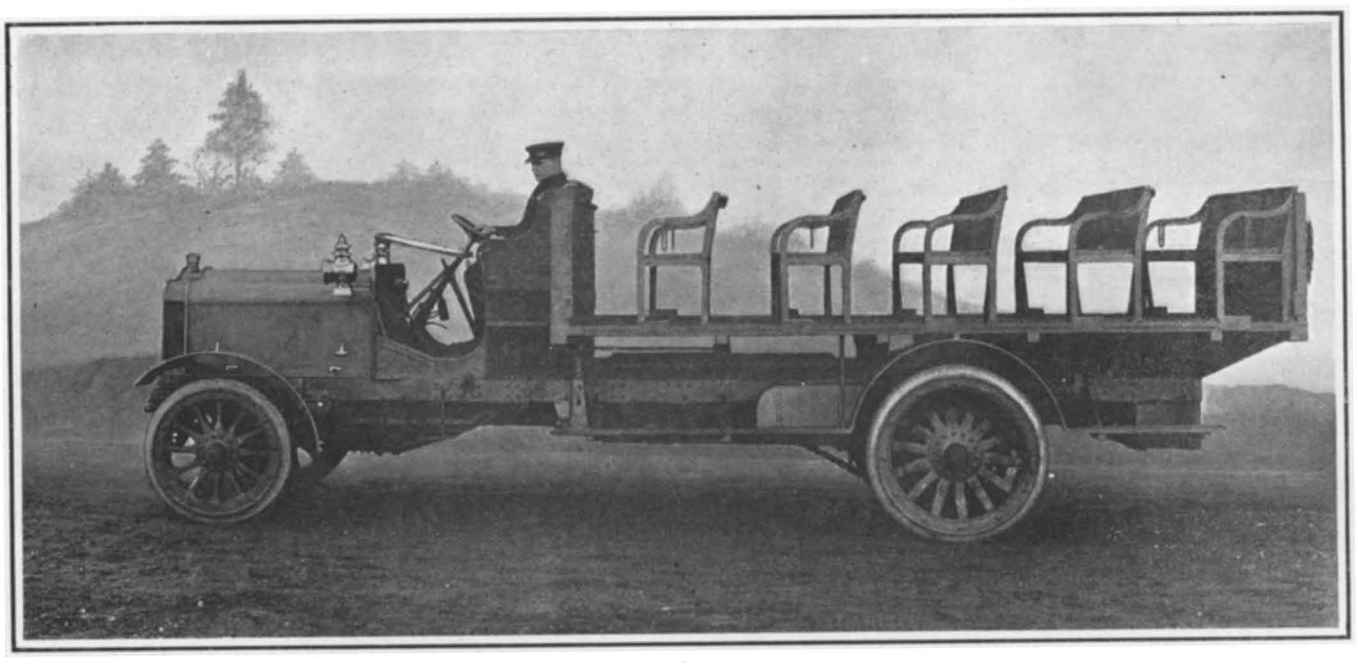

A CONVERTIBLE MILITARY TRANSPORT MOTOR WAGON.

The vehicle will accommodate 25 men, or it may be converted into a baggage wagon.

The vehicle has an over-all length of 21 feet 3 inches and is driven by a four-cylinder 32-horse-power gasoline motor. The over-all width is 6 feet 9 inches, while the top of the sides is 6 feet 9 inches above the ground. At the rear beneath the floor there is a toolbox, and a locker in which 6,000 rounds of rifle ammunition can be carried is also provided. Ringbolts are provided to permit of securing heavy and cumbersome piles of baggage with ropes if found necessary, and there are also two eyebolts large enough to take block and tackle. When used as a composite passenger and baggage vehicle, the seating accommodation comprises two rows of seats, the latter half of the car, 6½ feet in length, being used for stowing the baggage.

The commanding officer's seat is placed beside the driver, who is thus conveniently near for carrying out driving instructions, while to the dashboard is fitted a folding table for the use of the officer, who may desire to consult maps, etc., while in transit.

The convenient and handy nature of this car has recently been demonstrated. One of the volunteer battalions upon the Tyneside has acquired one of these vehicles and has found it highly serviceable for certain phases of military operations. Owing to its substantial construction, it is well adapted to the rigors of military service, though it is equally applicable to ordinary freight traffic. The vehicle was designed by Sir W. G. Armstrong, Whitworth & Company, the well-known British armament manufacturers.

Getting broken taps out, says a writer in the American Machinist, is, in one shop at least, performed by pouring hydrochloric acid into the hole. The acid is left there for about four minutes and enough of the tap and the hole is eaten away to loosen the tap.

A CLOCK WITH A SINGLE WHEEL.

BY R. NEWTON.

A unique product of mechanical and horological genius is illustrated herewith. Were it not for the familiar-looking dial, there are few persons indeed who would take this object to be a clock. This wonderful timepiece, which was constructed by C. H. Brigden, a watchmaker of Los Angeles, Cal., has been made to keep time with a single wheel only. This wheel is really no wheel at all, but rather a perforated disk which serves as an escape wheel.

The escape wheel is kept under rotary tension by two weights, very much like the escape wheel of a large clock. In place of a pendulum and gearing, 31 quarter-inch steel balls are used, which operate consecutively. When the timepiece is set, one of the metal balls is caused to descend, in zigzag fashion, on two pivoted plates, one located above the other. After the ball has descended to the lower plate, its course is directed in such a way that it enters one of the holes at the lower end of the perforated disk, releasing the disk and then proceeding in its rotary motion the space of one hole. As the time consumed by such an operation is limited to one minute, it follows that the disk must be pierced with 60 holes for one hour's time. The forward motion and stopping is effected by the unlocking and locking of a spring, the former part of which may be done by the percussion of the descending ball. As the perforated disk carries 30 balls on one-half its diameter, the addition of the 31st ball will change the perpendicular position of ball number one, and cause it to roll out onto the upper pivot plate. It will then repeat its original operation.

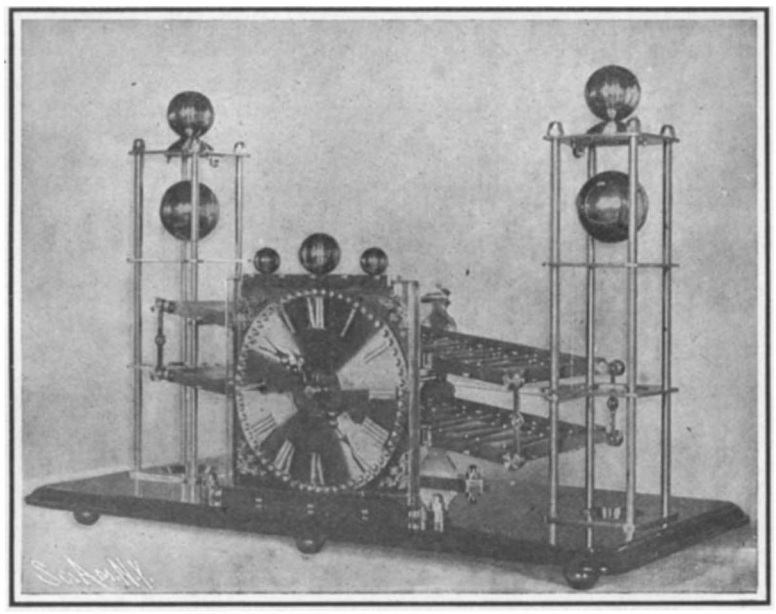

A CLOCK WITH NO GEAR WHEELS.

THE EXPLORATIONS OF THE GERMAN ORIENT SOCIETY.

BY DR. ALFRED GRADENWITZ.

Though our age is mainly characterized by a keen industrial activity, and a rapid advance of such doctrines as are apt to improve our standard of life, it by no means disregards the painstaking work of the archæologist, intent upon penetrating the spirit of bygone civilizations. On the contrary, we are safe in stating that those studies have never progressed so rapidly as in the last few decades, owing especially to the systematic excavation work carried out by the leading nations. As a result of these endeavors, the ideas so far held with regard to the relative importance of ancient civilizations would seem to be on the eve of a complete revolution, archæologists realizing more and more that the originality and importance of Grecian civilization, being mainly based on the far more grandiose Egyptian and Babylonian (and generally Semitic) civilizations, has been greatly overrated. If certain aspects of our modern civilization appear rather petty, as compared with the grandeur of Græco-Roman culture, the more ancient civilizations from which this has arisen, in their turn eclipse it by their incomparably greater majesty.

The interest of archæologists obviously centers round the African Orient and Western Asia, which is the cradle of humanity and its civilization. As private initiative is unable to cope with the political and financial difficulties besetting their work, the leading nations have organized special societies under the auspices of their respective governments and sovereigns. The German Orient Society, founded just ten years ago, under the patronage of the Emperor, and which boasts among its members the foremost scientists, as well as leaders of society, has been successful in contributing to a large extent to our ever-increasing knowledge of ancient civilization. Mesopotamia, the old Two River Land, situated in the valleys of the Euphrates and Tigris, forms the main center of the work of the society. The city of Babylon, with its walls and canals, and the royal citadel of Nebuchadnezzar and Nabopolassar his father have now been excavated almost entirely. Esagila, the national sanctuary of the Babylonians of old—the temple of Marduk, their supreme deity—has been restored to light, as well as the majestic double gates of the goddess Ishtar. After having been hidden by the earth for thousands of years, the towers of the gate now again rise to a height of 40 feet, and the reliefs of bulls and dragons decorating its walls, with variegated enamel tiles, still give an idea of the ancient splendor of its colors. It is mainly due to the indefatigable work of Prof. Koldeway, who for about ten years has lent the society his valuable assistance, that the complicated and extensive plans of this giant city, which had been so long the ruler of the world, will soon be reconstructed in their entirety.

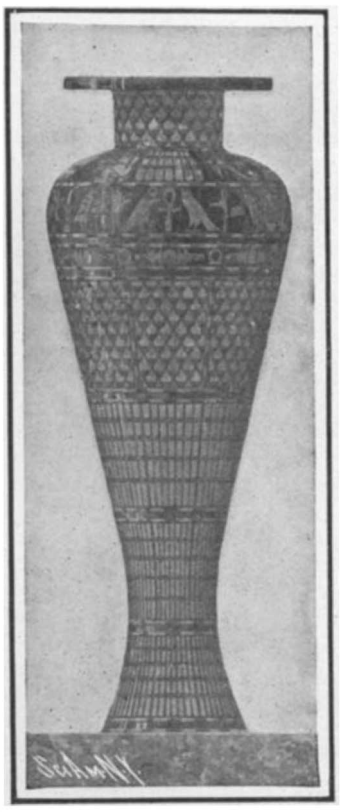

Vase From the Temple of King Sahure.

The headquarters of German excavation work in Babylon, in spite of its isolated situation, far from all European civilization, have been fitted up with relative luxury and comfort. The society has further done successful work on the site of ancient Assur. The palaces of Salmanassar I. (about 1300 years before Christ), Tiglath-Pilesar I. (about 1100 B. C.), and Assurnazirpal (900 B. C.), the temple of Assur, the uppermost Assyrian god, with its lofty tower (the Zikkurrat), have been laid bare with their foundations. The city walls, 23 feet in thickness, protected by a quay on the bank of the Tigris, with their vaulted sallyports and well-preserved ramparts, have again been brought to light from the surrounding debris. An enormous city gate has been found, with powerful double doors, situated one behind another, the six heavy basalt angle stones of which are still situated at the old place. Of special interest are the sepulchers, found in the middle of the city, and which are partly intact. They show that inhumation and incineration were practised side by side in late Assur. A number of private houses further give an insight for the first time into the arrangement and inner appointment of Assyrian dwellings.

In connection with the Mesopotamian excavation work, the German Orient Society has carried out successful researches of a similar kind in Palestine, viz., at Tell-el-Mutesellim (which, probably, is Megiddo of old), where in conjunction with the German Palestine Company, the city walls with their gates and a number of sepulchers have been uncovered; and in ancient Galilee, where a dozen synagogues were searched, especially at Tell-hum, the ruins of the well-known Biblical place of Capernaum. An expedition has recently set out to excavate ancient Jericho.

The first remarkable find made in the ruins of Babylon was a stele, bearing Hittite inscriptions, and which, as it were, presaged some even more important discoveries lying in store for the Orient Society. In fact, the latter only quite recently, in conjunction with the excavation work of the Ottoman Museum at Constantinople, succeeded in laying bare the capital of the once powerful Hittite realm in the center of Asia Minor, and the unexpected discovery of an archive comprising thousands of clay tablets, with cuneiform inscriptions from the thirteenth century B. C., justly amazed and startled the scentific world.

Egypt was very early the scene of similar work at the hands of the German Orient Society. At Abusir a number of sepulchral pyramids and mortuary temples of several rulers of what is called the Old Kingdom (about 2500 B. C.) have been discovered, giving for the first time a clear idea of royal sepulchers at that early epoch of Egyptian history. Their reliefs may be counted among the finest productions of the Egyptian art of those times. Numerous columns, partly in an excellent state of preservation, have been found in temples, and richly-gilded vases adorned with blue faience incrustations, which were used in connection with the cult of the dead kings, afford a rare pleasure even to our over-sated eyes. At Abusir-el-Meleq, at the entrance to the Fajum, there has been discovered an extensive prehistoric cemetery (of about 3500 B. C.), the tombs of which, with their numerous offerings, are of the highest importance to the history of the earliest Egyptian decorative art. A trial search, made at Tell-Amarna, would seem to be of very good

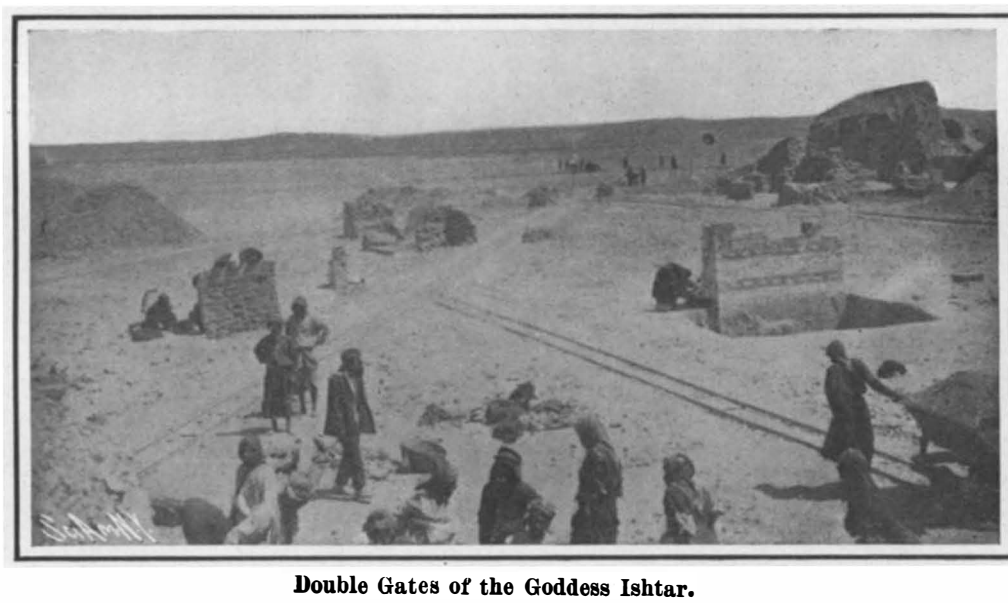

Double Gates of the Goddess Ishtar.

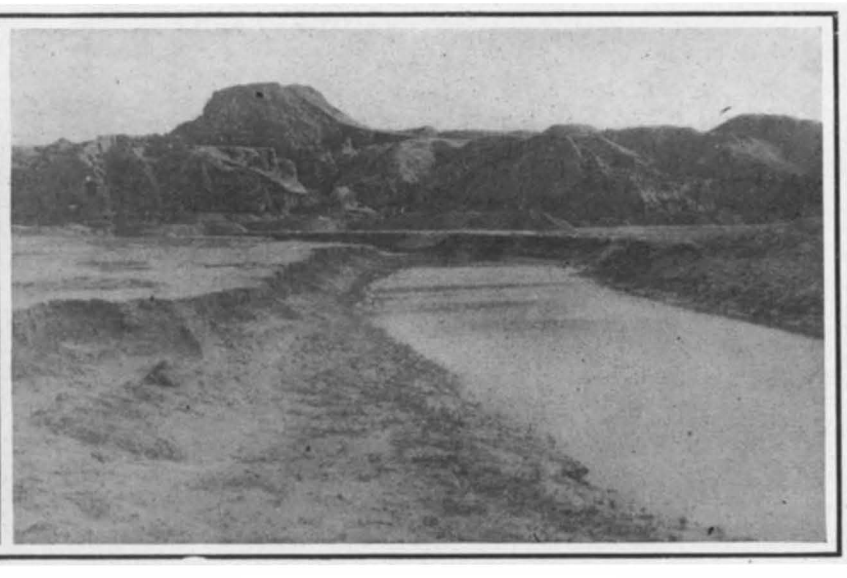

Excavations at the Assur Citadel.

THE EXPLORATIONS OF THE GERMAN ORIENT SOCIETY.

augury for the future, being likely to result in the complete excavation of the city of Amenhotep IV., the Egyptian "heretic king," whose reign was possibly the most remarkable epoch in the history of the ancient Orient.

An extremely interesting find, recently made in Lower Egypt, is a papyrus bearing Aramaic inscriptions in cuneiform and Semitic characters, according to which a prosperous Jewish colony was in existence as far back as five centuries B. C. The most remarkable fact borne out by those inscriptions (which have been deciphered by Prof. Sachau) is that a Jehovah temple, in which every detail of the Biblical cult was performed, existed in that country simultaneously with the second temple of Jerusalem. This, apart from the existence of numberless synagogues scattered throughout the civilized world of those times, is an excellent argument against certain modern critics of Judaism, who would fain abase it to a narrow-minded local cult, devoid of any universal ideas.

Apart from the excavation work proper, the German Orient Society has set itself the task of making its results more widely known, by issuing to its members four to six illustrated reports per annum, and by arranging a limited number of scientific publications intended to reach those interested in archæology.

Screen Plate Color Photography.*

In order that any method of color photography may be clearly understood, it is necessary first to consider the basis upon which color photography has been developed. That basis is that any color might be matched by a mixture of light of three different colors, those colors being chosen correctly as regards their spectrum composition, and then being adjustable in intensity until the color is matched. This effect is an experimental one, and independent of any theory of vision. If three isolated patches of the spectrum be taken, an orange red, a blue violet, and a pure green, then by mixing these three isolated patches, any of the primary or secondary colors may be matched, the only colors which cannot be matched being the pure colors outside the range, namely, pure monochrome violet, which is so dark that blue violet would match it quite satisfactorily, and pure deep spectrum red to which the nearest match which can be obtained is orange red degraded by black. In fact, pure deep spectrum red is the only color which could not be sufficiently well matched by this method. Forty years ago Ducos du Hauron suggested the production of a screen plate as forming a simple method of color photography, which was to consist of a sheet of transparent paper mechanically covered upon its surface with three kinds of colored stripes or divisions. Writing of this method, du Hauron said: "Let us imagine that one covers the surface of the paper on the side where the color stripes are imprinted with a preparation which gives directly, under the influence of light, a positive proof, and that one receives on its reversed side—namely, on the side not covered with stripes—the image of the camera. It will happen that the three single colors will filter through the paper and form each its positive print, i. e., its print in light of the corresponding ray of color, and the three prints will be formed with the same rapidity, in spite of the unequal degrees of actinism of the three simple colors, if one has been careful to give to each of these three sorts of stripes a relative translucency, inversely as the photogenic power of these same colors on the preparation employed."' That was in 1868, and it formed the basis of the screen plate processes, the first of which was put forward commercially in 1895, when Prof. Joly invented his system of screen plate photography. Prof. Joly ruled on gelatine-coated glass sets of three lines, and placed the screen so prepared in contact with the sensitive plate. After exposure the plate was developed and the positive made; it was then again placed in contact with the screen, the result being a most satisfactory image in colors. The real difficulty of the Joly process appeared to have been the difficulty of obtaining plates which should be regularly of the same sensitiveness. The compensating screen which fitted one batch of plates would not fit another, and that difficulty was felt to be a grave objection to the general application of the process.

Somewhat previously to Prof. Joly's method, Macdonough had prepared plates by scattering over their surface small flakes of colored shellac, and then fusing these flakes on to the surface; but Macdonough was convinced of the superiority of the line method, possibly because of registration difficulties, and he endeavored to produce screens by machinery in large quantities. The plates were ruled with fine lines by means of celluloid wheels which deposited colored inks on the surface, but the process was very difficult and the plates were extremely costly to make.

Another process, one which is said to be nearly ready, is that invented by Robert Krayne. Sheets of celluloid are stained in the requisite colors, and are then placed on the top of each other and cemented together so as to form a continuous block of red, green, and blue celluloid. A section is then cut straight through this block, and a leaf obtained which shows throughout its width the red, green, and blue lines which were originally the leaves forming the block. To make the Krayne mosaic screen, these lined screens are again cemented together to form a block, and a section is now cut at right angles to the line direction. The colors of the Krayne plates which the lecturer had seen were very good, but it is difficult to get the line sufficiently fine. It involves the cutting of extremely thin celluloid sections; and it must be remembered that the narrower the lines became, the finer must be the celluloid; otherwise the parallax error due to the thickness of the line would be appreciable, and it would probably be necessary to support the film on glass if it became so thin. Also, if the line is to be made very thin, it would be necessary to dye the celluloid very deeply, in order that the colors might be of the requisite intensity. I have coated a sheet of glass with bichromated gelatine on the ordinary coating machine, and then exposed this glass under a lined screen having the black lines one-half the width of the spaces. In this way two-thirds of the width of the screen became hardened, the lines covered by the black screen line remaining soft. This soft line was then dyed up with one of the many dyes which do not penetrate hard gelatine, and, after drying, the plate was again coated with bichromated gelatine, and the second and third lines were put on in the same way. This method of manufacture is quite simple with coarse lines, such as are necessary for illustrative purposes, about 15 to the inch, but I doubt if it would be commercially practical for small units. It does not follow that the method which comes to the fore is easiest of production, or the one calculated to give the best results. Either of those things might be true or might not. In order that a process might be commercially introduced, there is required not only the primary idea, but a great deal of patient working out, and probably a manufacturing house behind it. Because in the end the production of anything of that sort is a question of commercial scale working, and only a factory could experiment on a sufficiently large scale.

Regarding light filters, by using an inclosed arc (barium being introduced into the arc to produce a line spectrum) focused on the condenser of a microscope with a 1/10th inch objective, and then a micro-spectroscope attached to a camera, it is possible to obtain spectrographs of the absorptions of the Lumière and the Warner-Powrie filters. But there is another method of doing this which is quite as satisfactory and very much less trouble. Fitted in front of the spectroscope a small black wedge which will give a gradation of light along the slit, the variation in intensity running from 1 to 10,000, and consequently spectrophotographs in this spectroscope show a scheme of hills and valleys, the summits representing the maxima of sensitiveness and the valleys the minima. In regard to obtaining positives, an obvious method of using screen plates is to make a complementary negative, and then to print a positive through a second screen; but if this were done, it would be found that the colors are quite faint, being degraded by grays. With regard to the whole use of screen plates, one is bound to feel that interesting as they were, and marvelous as has been the ingenuity shown in the production of autochrome plate, yet at the present time their application must be limited. No color process which can not be printed on paper can hope to appeal to the great mass of workers. And if the plates are used as transparencies, either in the hand or in the lantern, the density caused by the presence of the screen is so great that a special view apparatus is desirable, a very great drawback indeed to the plates. What screen plates need, in fact, as their complement is a printing process such as some improved bleaching-out emulsion, which could be placed on paper and on which the plates could be printed. In the meantime screen plates, and especially the plate which alone can be obtained at the present time, must surely form the most fascinating toy as well as the most useful instrument which photography has to offer.

* From an address by Dr. C. E. Kenneth Mees, D.Sc., before the London Society of Arts. An important historical article on the history of color photography appears in the current issue of the Supplement.

Aeronautical Notes.

A trial flight was made on April 17 by Army Balloon No. 10, carrying Lieut. D. S. Lang of the Signal Service Bureau, Captain Van Horn of the President's staff, Lieutenant Thomas Selfridge, and R. A. Collins, a newspaper correspondent. The start was made from Washington, D. C., at 2:17 P. M. The intention of the aeronauts was to fly to the south of the city, but the balloon went in the opposite direction, passing over Montgomery and Howard Counties, and attaining a height of 7,000 feet when above Ellicott City. Here a change in course took place, the balloon drifting eastward across Anne Arundel County, the Patapsco River, and Spring Gardens, whence it passed over Baltimore. It dropped to an elevation of but 600 feet and the aeronauts, despite their efforts to remain aloft by throwing out ballast, finally landed on a private estate in the northern suburbs at 6:15 P. M.

The new company for the manufacture of dirigible balloons, which has recently been formed in France, has undertaken the construction of a dirigible of the type built and experimented with by Count de la Vaulx a year or so ago. This company has an aerostatic park and shed at Saint-Cyr, just back of the park of Versailles. Count de la Vaulx is the director of experiments, and he expects shortly to have several dirigibles ready for test. In Germany the Berlin Motor Airship Company is having a new dirigible built by Riedinger, of Augsburg, after the plans of Major von Parseval. It is expected that this airship will be completed in May. The new dirigible is of about the same size as the former Parseval airship. The military authorities have established an aerostatic park at Metz. The first airship to be located there will be one of 70,629 cubic feet capacity, which is being constructed after the designs of Major Gross.

In addition to the aviation prizes tabulated in a recent issue of the Scientific American, there have been several other prizes recently offered. The chief of these (which, however, is only offered to German aviators, whose machines have been built and experimented with in that country) is the sum of $10,000 given by Herr Karl Lanz of Mannheim. This generous merchant has also offered $2,500, to be used in aiding poor inventors in the construction of their flying machines. His example is one which should be followed by wealthy men in this country, in order to hasten the development of the new science. Other prizes are $5,000 offered by the Municipal Council of Dieppe, France, for aeroplane races to be held at that place during the second week of July; $500 offered by M. Montefiore for the longest flight before July 1; $1,000 offered by the Aviation Commission of the Aero Club of France for the longest flight before October 1; and $250 or more (the prize being raised by subscriptions) for the first machine to fly over a line 25 meters high in the presence of the Aviation Commission of the Aero Club of France. The Michelin prize of $3,000 annually for ten years has been changed to $4,000 annually for eight years, and the distance which must be flown the first year has been raised to 12 kilometers (about 7½ miles). As M. Delagrange has already flown about 4½ miles on the 11th instant, it seems probable that the winner of this prize in 1908 will be obliged to make a flight of a considerable distance. The flight must be in a closed circuit, and must be held under the direction of the Aero Club of America if made in this country.

An effort is being made by several leading aeronautic experts in this country, including Alexander Graham Bell, Octave Chanute, and A. Lawrence Rotch, to obtain a fund of $25,000 to be given as prizes for aeroplane flights by Americans. It is hoped to raise the money before August 1, and to then turn over the fund to the leading aero club of the country, or to some scientific institution of national standing. The club or other organization will frame the rules and conduct the contests. In this way it is hoped that experimentation will be encouraged, and that the leading aviators of this country will come forward and demonstrate what their machines are capable of doing. Subscriptions to this fund can be made conditionally upon the raising of the entire amount. Such subscriptions need not be paid before August 1. All desiring to subscribe should signify their intention by writing to Mr. James Means, Box 167, Back Bay Post Office, Boston, Mass.

The Current Supplement.

The question of coast erosion is a very serious one in England. The city of Brighton has suffered much in the past; for the large chalk cliffs, which rise to a height of about 120 feet on the Brighton coast, have from time to time crumbled in heavy storms. J. B Van Brussel in an article entitled "Groynes of Reinforced Concrete to Check Coast Erosion," describes efforts which are being made to prevent these ravages. After five months of continuous labor, the unanimous report of the commission of inquiry on the Quebec Bridge disaster was presented to the Canadian Parliament on March 9. We present in the Supplement an outline of the investigations and a summary of the conclusions reached by the commission. The introduction of high-speed steel for machine tools has called for stronger drills to sustain the increased feed and speeds. How one Chicago company has met this need by the introduction of a novel 16-spindle drill is described. G. Chalmarés contributes an article on a constant-level gas meter. Chapman Jones, the well-known English authority on photography, gives a very complete review of the various efforts which have been made in the past to make photographs in colors. In an article entitled "Farming the Kangaroo" Harold J. Shepstone describes a novel experiment which has proved successful in England. Jacob B. Brown contributes a very interesting article on eclipses, in which he shows how they are calculated.

Correspondence.

Concrete Dwellings Built in Sections.

To the Editor of the SCIENTIFIC AMERICAN:

Permit me to call to your attention a system of constructing concrete dwelling houses in section which to some may seem inspired by Mr. Edison's plan, but which was in reality conceived long before his scheme of casting houses was made public.

One of the principal features of my system is the wall construction, which consists of upright pillars, columns, or plates formed of concrete (monoliths) reaching from the base upon which the floor rests to the ceiling or support of the second story or roof. These monoliths or units are cast in molds and when placed in the building match to form the walls of the house. Provision is made for doors, windows, bay windows, to suit the views of the owner, the monoliths lending themselves and matching in various ways. These monoliths are peculiar in form, each being composed of an exterior wall and an abutment member in one piece, the abutment member being of sufficient depth to insure stability. The wall member therefore may be comparatively thin. The aggregate amount of material used for this construction is considerably less than when the ordinary concrete blocks or any other concrete form is used. The monoliths are connected on the top by molded slabs or plates that fit over the form of the ends of the monoliths. These plates project beyond the face of the wall, if desired, forming a dripping shelf, or an ornamental, horizontal band. The inner edge of these plates forms a molded cornice inside the room, in a line with the faces of the abutments; these plates, extending entirely around the walls of the house and projecting into the house, form the base for the support of the floor slabs. The floor slabs are reinforced and can be supported by reinforced concrete girders or beams, the floor slabs forming the ceiling of the room and the floor of the story above.

In a one-story house, roof slabs with provision for shedding water are used in place of floor slabs, and the walls extend up and are finished off by special concrete in the form of parapet or balustrade. A second story can be added using the same style of monoliths, fitting and resting on the plates.

These wall, floor, and roof slabs and plates are of such size, form, and weight that two or three men can handle and place them. They can be made where the material is accessible and cheap and transported like lumber to the building site and set up dry and tight in a few days. Building can be done in sections and more rooms or stories can be added as convenient.

This construction gives other valuable features. The spaces between the abutments all around form closets deep or shallow, dead-air spaces, flues, etc., by closing these spaces with doors or plaster board. Piping and wiring are easily provided for and always accessible.

The inside finish of the rooms will mostly be by doors of standard sizes and wooden panels. The abundant air spaces all around and the inside finish, mostly of wood, make the house cold and heat proof to the largest degree, as well as handsome and inexpensive. The kitchen and dining room can have abundant closets, shelf room, and recesses for range, tubs, etc. The living room can have abundant shelf room and books let into the wall inclosed by sliding or swinging doors. The parlor can have dust-proof glass cases for the bric-a-brac. The chambers will have abundant closets for clothing convenient in width and depth and full height. The space occupied by the building is more thoroughly utilized than any other form or mode of construction. Heating and ventilating are provided for by the most efficient and economical method.

This construction is intended to provide a permanent, fireproof house for families where economy is important. The first cost is less than any other form of concrete structure. The cost of keeping the house from year to year will be less than any other form. The outer walls can be made of any tint and the cost of painting minimized. The roof will be tight and permanent. There is absolutely no waste room. The greatest amount of room space is obtained with the least material. The conveniences are far superior to any other construction that will compare with it in cost. There are numerous valuable features that attach themselves to this mode of construction, the detail of which cannot be mentioned in this article.

Brooklyn, N. Y. THOMAS HALL.

A number of cases of zinc poisoning on board men-of-war have been found to be due to the zinc slabs fitted in the ships' filter tanks.

THE PRACTICAL WORK OF THE UNITED STATES BUREAU OF FORESTRY.

BY DAY ALLEN WILLEY.

Less than ten years ago the United States Bureau of Forestry began active operations, but in this period, limited as have been the facilities of the Bureau, it has accomplished such results that it may now be considered one of the most valuable divisions of the Department of Agriculture. Compared with the forest service of Europe, its facilities are indeed limited, for the total number of employees in the Bureau at the present time is less than 2,000, although it is caring for 166 national forests in the United States and its dependencies, embracing an area of no less than 162 million acres, representing over 250,000 square miles.

In the United States some of the individual forest rangers have an area of 200,000 acres of wilderness to care for. This means to guard against forest fires, the depredations of timbermen who would cut trees without authority, to preserve order among those who may be located upon the reserve, to supervise any grazing operations, in addition to performing other duties. Such is the extent of a field, that the ranger or guard may require a month or more to go from end to end of it, and during the journey must not only utilize his pony, but possibly a boat to navigate the lakes and rivers on the route. In these 166 forest reserves are actually less than 1,500 men of all ranks, and of the Bureau of Forestry less than 1,200 are forest rangers and guards.

The importance of the forest reserves from a commercial standpoint can be realized when it is stated that the government receives $1,500,000 in a single year from the use of land for grazing and from timber sold from the forests. It is a well-known fact that cattle are of much value in enriching poor and barren soil, so stock owners are given permits to turn their herds into the national forests, where pasturage can be obtained in sufficient abundance. Sheep are also allowed in regions where the undergrowth upon which they may feed is so thick and rank that they will aid in clearing it. This prevents the earth from being exhausted, and thus assists in the growth of the trees.

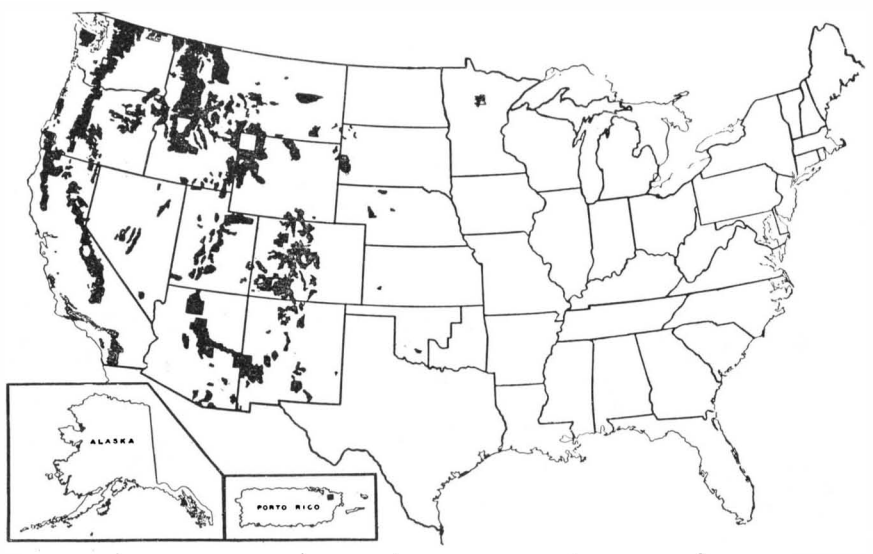

MAP SHOWING, IN BLACK, OUR NATIONAL FOREST RESERVES.

An important branch of the Bureau is devoted to wood chemistry, where tests are made of the value of certain timbers for such structures as buildings and bridges, also for paper pulp and distilled products from the wood. Practically all work is done in co-operation with persons or companies directly interested in the results. In co-operation with railroad companies, improved methods have been found of treating cross ties of Douglas fir, lodgepole pine, western yellow pine, red oak, loblolly pine, hemlock, tamarack, western larch, and western hemlock. Test railway tracks have been laid containing untreated ties and ties treated with various preservatives, in order to study their relative values under actual conditions of exposure. Different forms of metal and wooden tie plates have been employed with both screw and common spikes, in order to determine the most efficient rail fastening for softwood ties.

Since the Bureau of Forestry was organized, much attention has been given to the preserving of timber for telegraph poles. Test lines have been established, in which green, seasoned, and treated poles are placed successively to determine the lasting qualities of each sort through a period of years. The officials of the Bureau believe that much of the dead and fallen timber in the national forests may be made of value with the application of preservatives. Co-operative investigations have been carried on with cities to determine the kinds of woods suitable for paving blocks, and methods of treating them; experimental pavements have been laid, containing various kinds of wood treated in different ways. A study has been made of the timbers employed as piling in salt water, and the methods in use to protect them from the attack of marine wood borers. But perhaps the most valuable work of the organization is that associated with reforesting, the planting of forests on what formerly was desert land, and which now has been reclaimed for settlement by irrigation. The trees used in planting are grown at eight government nurseries in the following national forests: San Gabriel, Santa Barbara, Gila, Dismal River, Pike's Peak, Salt Lake, Pecos, and Lincoln. The combined area of seed beds at the eight stations is such that they now contain over 5,000,000 trees, from one to three years old. The seed sown in 1907 should produce not less than 4,000,000 trees, giving a total of over 9,000,000 in 1908.

The preliminary stage of forest planting within the national forests is now past, and several of the planting stations have produced trees of sufficient size to plant directly on the permanent site. About 700,000 trees were planted during the winter and spring of 1907, the greater part in the Dismal River, Niobrara, North Platte, San Gabriel, Santa Barbara, and Pike's Peak national forests. At the nursery in the Dismal River national forest more stock has reached an age suitable for planting than at the other stations. This nursery contains approximately 2,500,000 trees. At present there are about 1,000,000 trees for planting in the sandhills. The species largely in use up to this time are western yellow pine and jack pine. Other species, chiefly Scotch pine, Norway pine, and Douglas fir, are being tested in the nursery and in experimental plantations.

In 1906 plans were made for the establishment of small nurseries at rangers' headquarters in the national forests. Many nursery sites were selected, and the preliminary work has already been completed at some of these. The primary object was to train forest officers in nursery and planting work, and at the same time secure a considerable stock of seedlings for local use.

When we remember that no less than 200 million acres of arid lands may be adapted for agriculture by irrigation, and that already six million acres have thus far been reclaimed, it will be seen that the efforts of the Bureau of Forestry to create woodland tracts in what is now a treeless country are of the utmost importance. The forests are absolutely necessary for fuel. They are of value for shade, while they have a most important bearing upon any climate where they are located. In the tree nurseries and in the reforesting of denuded areas the most modern methods are employed, and the Bureau is assisted by a staff of able men, most of whom are graduates of forestry schools either in this country or Europe. The accompanying photographs give an idea of the methods employed.

The chief points in collecting seed are to collect mature cones, before the seed scales open, from large, well-formed trees; to open the cones by exposure to the sun, if possible; if not, by the use of artificial heat; to clean the seed by screening or winnowing; to store the seed in a cool, dry place, away from mice and rats. Comparatively level, deep, moderately fertile, well-drained soil is best for the nursery. At least one-half acre is set aside for a ranger nursery. Of this, much the larger part is required for transplant beds after the first or second year. A convenient size for seed beds is from 4 feet to 6 feet wide and 12 feet long. Paths 18 inches wide separate the beds. To insure drainage, the beds are raised from 2 to 3 inches above the surface of the ground.

The seed is sown either in shallow drills or broadcast on the beds. Drills are best, since the seedlings can be cultivated more easily. The drills are 6 inches apart, deep enough to cover the seed, and run across the beds. They are made by dragging a sharpened stick along one side of a 6-inch board. A still more rapid method is to nail triangular strips the desired distance apart on the underside of a board, and to mark the drills by pressing the board down on the bed. Sowing is ordinarily done in the spring, about the time early garden seed is planted. Immediately after planting, the beds are covered with a very thin mulch of clean leaves, moss, or needles. This keeps the surface moist and hastens germination. Water in limited quantities is applied to mulch beds. Practically all evergreen seedlings are transplanted to open nursery rows when one or two years old. Transplanting is done in the spring, when the soil is in good workable condition, but before new growth begins. Transplant beds are near the seed beds, and on good soil which has been prepared as thoroughly as for a garden. The usual width for transplant beds is 6 feet, with any convenient length. They are elevated slightly. The rows are 8 inches apart and run across the beds. The seedlings are set from 2 to 4 inches apart in the rows. In transplanting, great care is taken not to allow the roots of the seedlings to become dry, since even a short exposure to sun or air will be

fatal. After the seedlings have remained in the transplant beds one or two days, they are taken up and planted on permanent sites, chosen for their adaptability to the particular species grown.

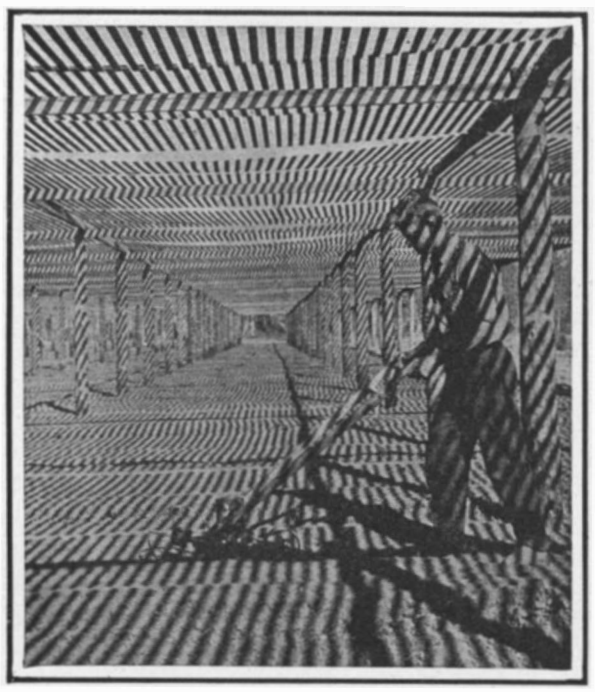

Cultivating Young Trees in a Covered Nursery. The Striped Effect is Produced by Sunlight Falling Through the Slatted Structure.

Considering the results it has accomplished and is accomplishing, the Bureau of Forestry well deserves the mere pittance which it receives from the country in the annual appropriations. So far it has not had over $1,500,000 a year, upon which it must depend to carry on this work. Consequently, rigid economy must be practised in salaries and other expenditures. The supervisors receive from $1,500 to $3,000 a year, although this service requires a man who has not only had an extensive field experience, but must have scientific knowledge. The rangers, who may be called the forest guardians, receive from $900 to $1,500 a year, based upon the extent of their territory and the difficulty and number of their duties. Out of this sum must come the expenses of their horses and ponies, while they "find" themselves, the government merely furnishing them a cabin and a fence for the little pasture in which they may feed their stock. The guards, who are really assistants to the rangers, do not receive over $900 a year.

The benefits that this service may accomplish for the country, however, can only be realized by noting what has been done abroad. In Prussia, where forestry has perhaps reached the highest standard, the problem has been how to improve the forests in poor condition out of the returns from woodland which is in good condition. Since 1830 the cut of commercial timber has increased from only 20 cubic feet to the acre of forest to nearly 70 cubic feet at the present time.

In other words, by the forestry system the woodlands of Prussia have increased their production of timber products more than three times within seventy-five years, but the money value is in much greater proportion. The net returns to each acre of woodland at present are over $2.50, having increased tenfold within sixty years. The state forests of Saxony, which comprise about 450,000 acres, are in charge of a forestry bureau at a yearly expense which averages $3 for each acre; but such is the extent and value of the timber and other products, that the net yearly revenue averages $5.30 per acre after deducting all expenses. The appropriation of the United States for the Bureau of Forestry is so insignificant, that it amounts to a little less than one cent for each acre. Consequently, it is not strange that our revenue from this great natural resource is so small in contrast with that of European countries.

Experiments in Light Visibility.

The result of the experiments in light visibility conducted by Germany and the Netherlands working in harmony are given as follows: A light of 1 candle-power is plainly visible at one mile, and one of 3 candle-power at three miles. A 10-candle-power light was

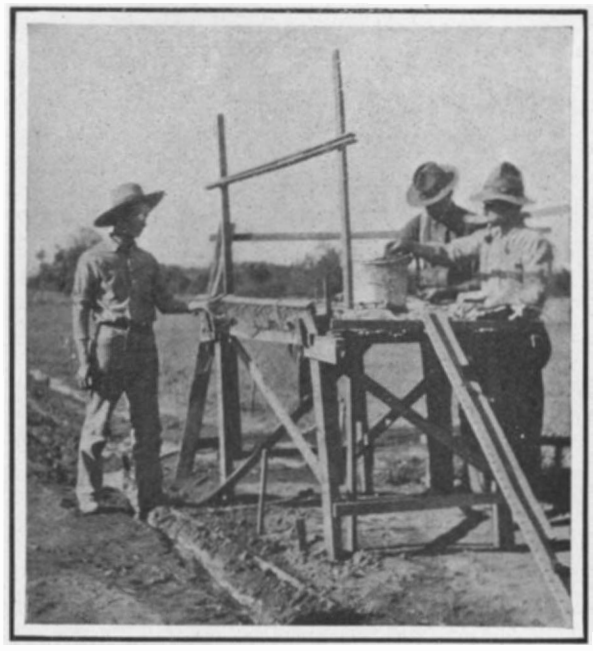

Table Holding a Transplanting Board on Each Side, the Nearer One Filled With Trees.

seen with a binocular at four miles, one of 29 at five miles, though faintly, and one of 33 candle-power at the same distance without difficulty. On an exceptionally clear night a white light of 3.2 candle-power could be distinguished at three miles, one of 5.6 at four and one of 17.2 at five miles. The experiments were made with green lights, but red lights of the same intensity can be seen at greater distances.

The Plants in Position With the Transplanting Board About to be Removed.

Sheep Grazing in the National Forest on Undergrowth Which Checks the Spread of the Trees, Thus Removing a Menace to Forest Growth.

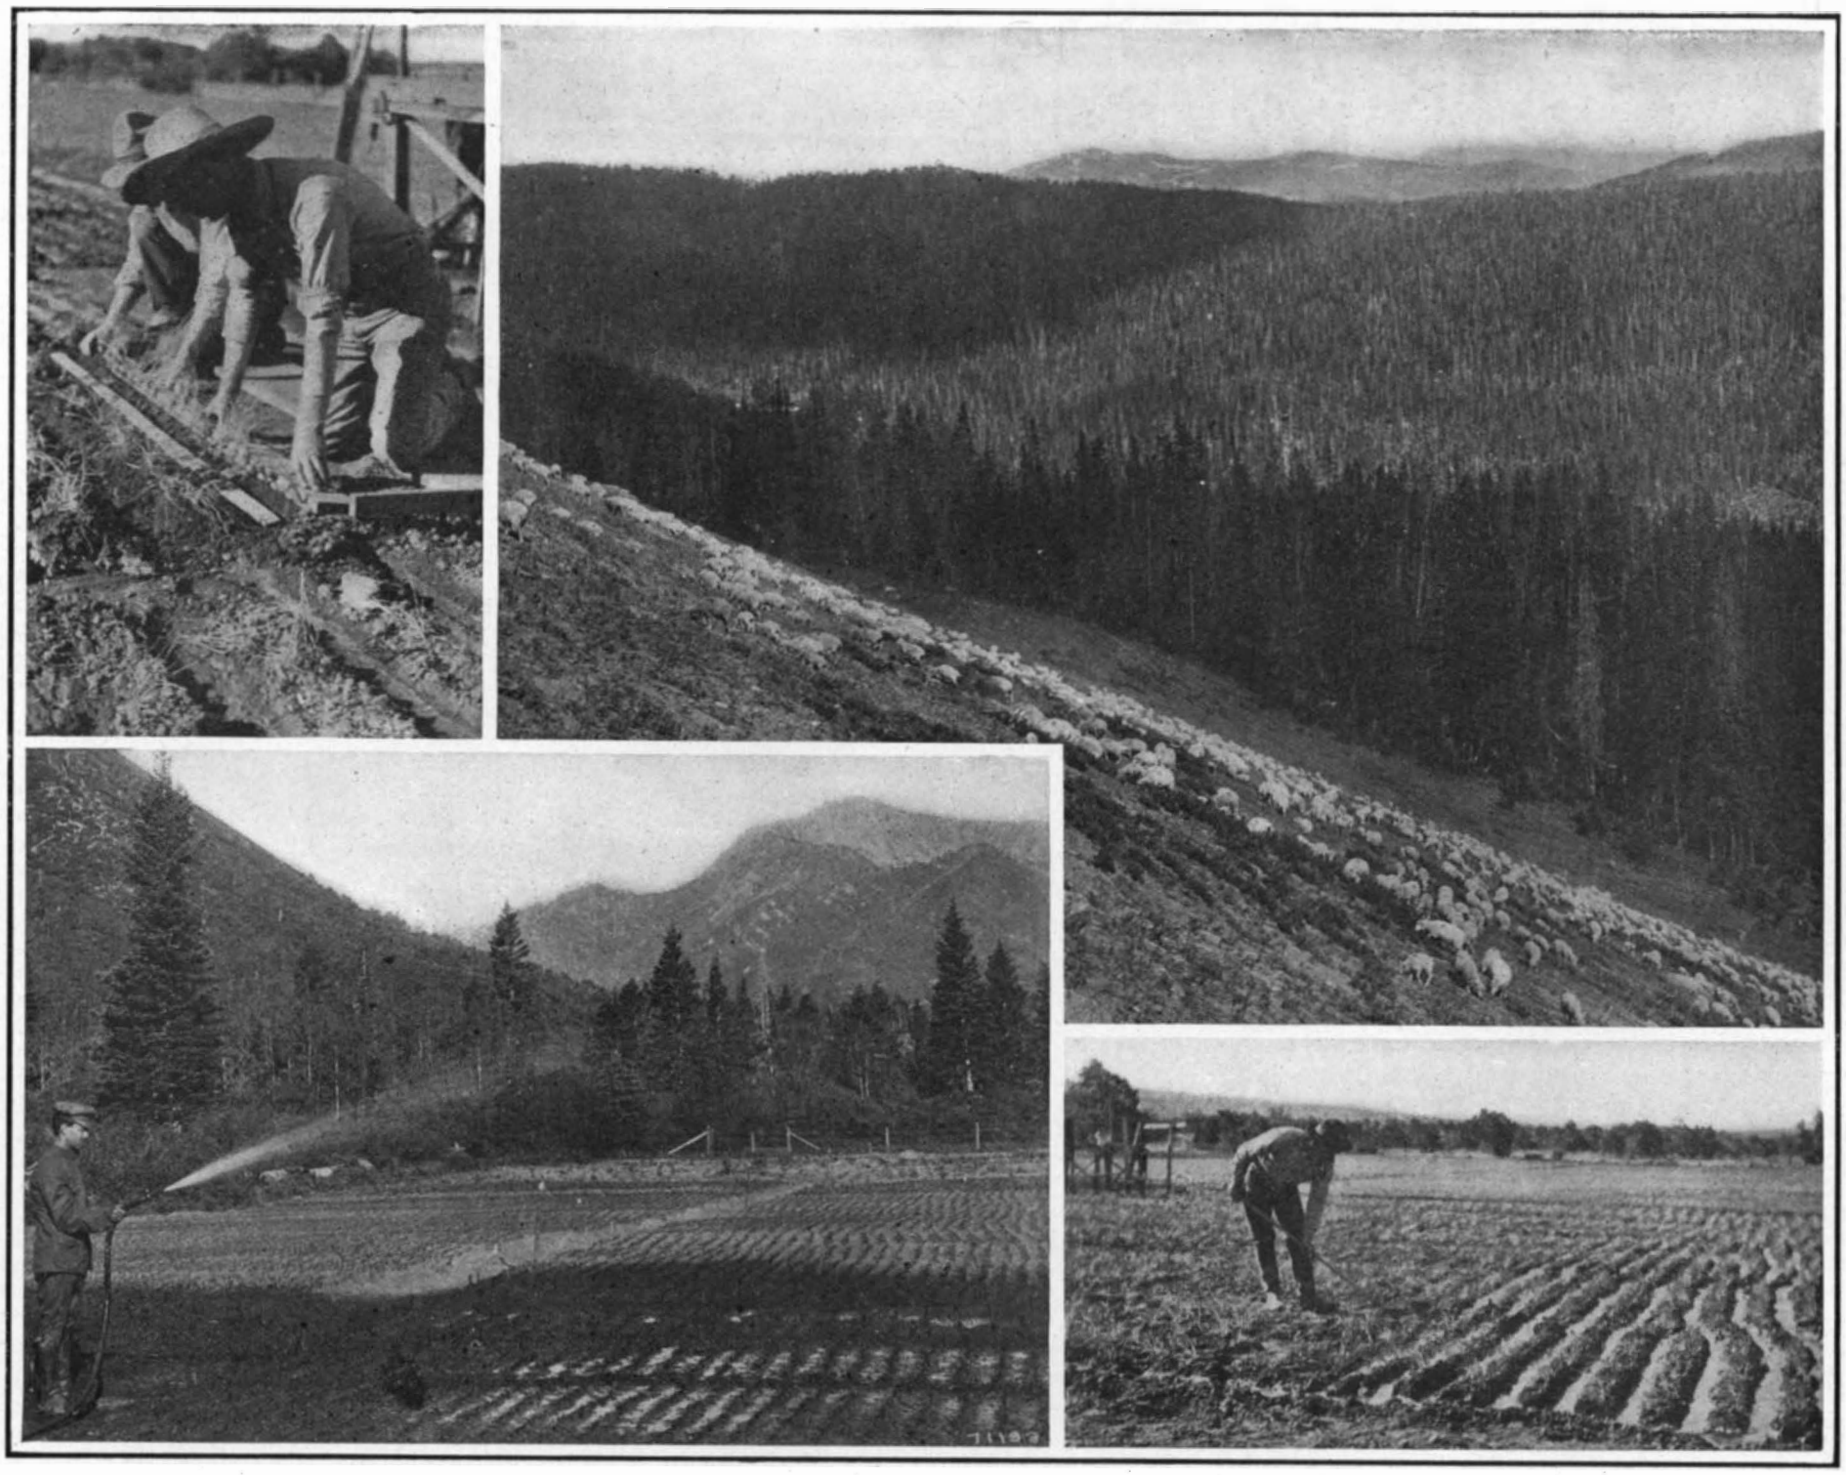

Watering Young Trees on Reserved Plantations in One of the Utah National Forests.

Irrigating Transplant Nursery Beds by Running Water Between Rows 10 Inches Apart.

THE PRACTICAL WORK OF THE UNITED STATES BUREAU OF FORESTRY.

THE UNITED STATES TRAINING SHIP "SEVERN."

The United States navy possesses four training ships, the "Boxer," "Cumberland," "Intrepid," and "Severn," all of them of modern design and construction. The "Boxer" is a little brigantine, 125 feet 4 inches in length and of 346 tons displacement, now stationed at the training station, Newport. The "Cumberland" and "Intrepid" are sister ships, 211 feet 7 inches in length over all, and of 1,800 tons displacement. They are bark rigged, and each has a complement of 336 officers and men. The "Cumberland" is stationed at the navy yard, Boston, and the "Intrepid" at the navy yard, Mare Island.

The "Severn," which forms the subject of our illustration, is a steel vessel wood sheathed and copper bottomed. She was launched in 1899 at the Bath Iron Works, Maine, and her present duty is to serve as a practice ship for the naval cadets at Annapolis, where she is stationed. She measures 175 feet between perpendiculars and 224 feet 3 inches over all. Her beam is 37 feet; her mean draft 16 feet 6 inches, at which draft she displaces 1,175 tons. It will be noticed from her dimensions that she is a narrow ship, having only 37 feet beam to 175 feet of length, as against a beam of 45 feet 8 inches possessed by the "Cumberland" and "Intrepid" for a length between perpendiculars of 176 feet 5 inches. Because of her fine model the "Severn" is quite a smart ship, and in a good quartering breeze can do her 12 knots or over. As her duties are exclusively those of a training ship, the "Severn" has no armor protection; but she mounts a battery of six 4-inch rapid-fire guns; four 6-pounders; two 1-pounder automatics, and two 6-millimeter automatics.

In former days, we believe it was the custom to give the naval cadets their training in practical navigation and seamanship entirely upon the training ships, which made long ocean cruises for this purpose. At the present time, however, in view of the great change which has taken place in the character of the ships of our navy, machinery having taken the place of sail power, and the masts and elaborate running and standing gear having been practically all eliminated, the training of the cadets is accomplished by giving them short week-end cruises throughout the academic year in the "Severn" principally in Chesapeake Bay and by distributing them during the summer season upon various modern warships of the navy which are in commission, and so giving them the customary three months' cruise. In this way the cadets secure an amount of experience and knowledge of the practical working of a modern warship which could not possibly be obtained on a training vessel. For instruction in what is understood by the broad term "seamanship" the cadets are largely indebted to the all-day cruises in the "Severn" in the picturesque waters of Chesapeake Bay.

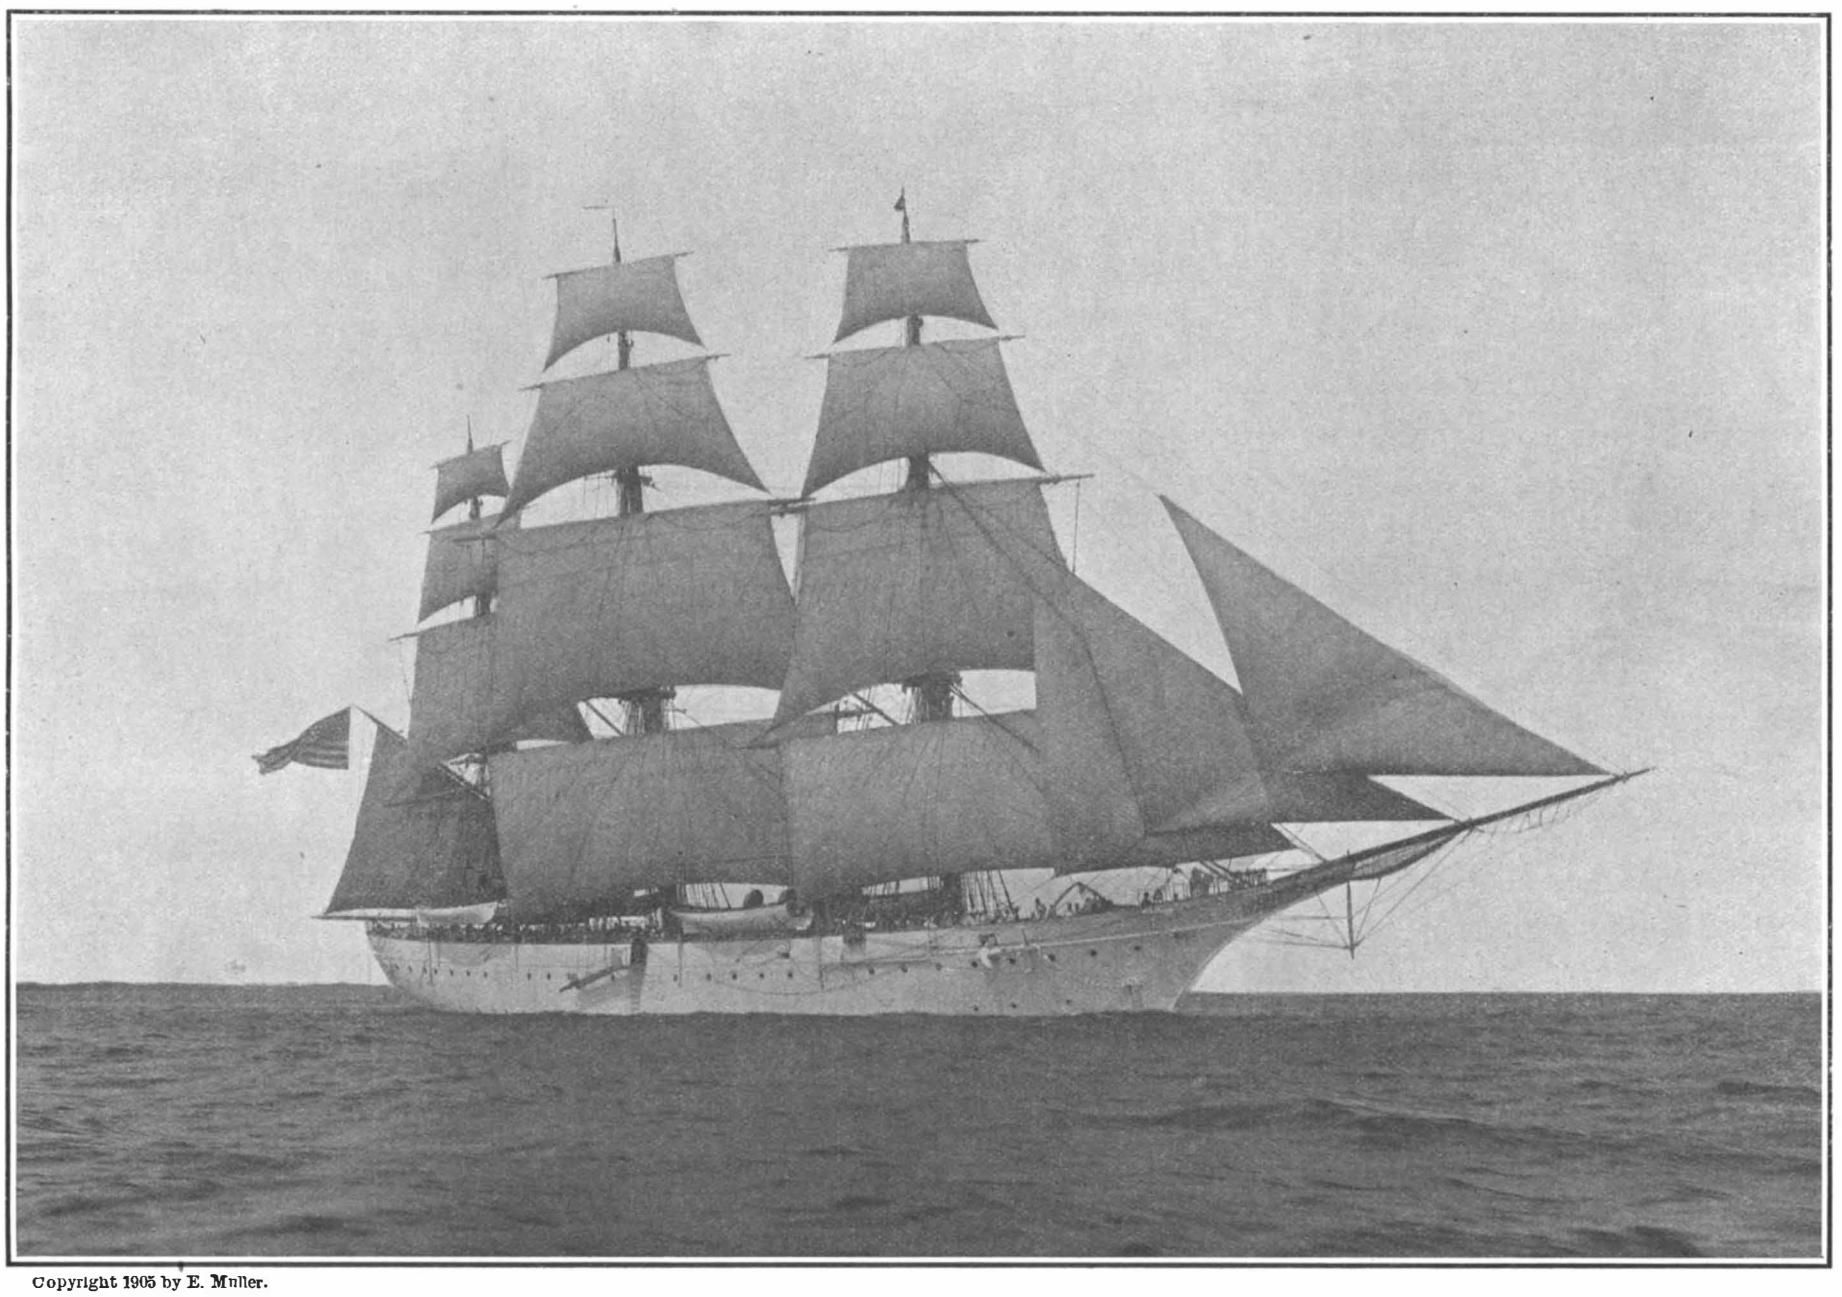

Copyright 1905 by E. Muller.

THE UNITED STATES TRAINING SHIP "SEVERN."

Length over all, 224 feet 3 inches. **Beam,** 37 feet. **Draft,** 16 feet 6 inches. **Displacement,** 1,175 tons.

Acetylene Now a "Common Illuminant."

The rules formulated by the National Board of Fire Underwriters for the acetylene industry have hitherto required outside installation of acetylene generators; and while, as a matter of fact, in by far the largest part of the United States this rule has not been insisted upon, in certain limited sections it has been rigidly enforced.

The existence of a rule prohibiting the installation of an acetylene generator in an insured building was a constant menace and handicap to the industry, and its enforcement in some sections and not in others placed insurance companies in the inconsistent position of insuring property in one State under conditions which it would not accept in another. An investigation by the National Board, as to the exact condition of the industry, disclosed the fact that, in those sections where inside installation had been permitted, acetylene was proving itself to be a safer illuminant than those which it had replaced.

The National Board of Fire Underwriters, at its Executive Committee meeting on January 30, 1908, held in New York city, after considering the various favorable reports submitted to it by its various committees, amended the rules covering the installation and use of acetylene generators.

The rules now mean that in all outlying districts generators may be placed inside, but in closely built-up districts it recommended outside installation as its preference.

Even where outside installation is preferred, the rule regarding construction of generator houses has been modified; and where such houses formerly had to be fireproof, constructed of brick and located as far as practicable from other buildings, such houses may now be located adjoining an insured building, and fireproof construction is not required.

The investigations which were set on foot for the purpose of ascertaining facts brought forth the conclusion that, in view of the fact that the number of acetylene generators installed inside of buildings had very largely increased in the past few years, while, at the same time, the fire records seemed to show that the number of fires ascribed to such installations had if anything decreased, the rules of the National Board covering the construction and installation of acetylene apparatus had apparently safeguarded the hazard to a very great extent.

A $20,000 Transvaal Stope Drill Competition.

The Transvaal government, in co-operation with the Transvaal Chamber of Mines, has arranged for a practical trial of small rock drills suitable for narrow stoping work under the working conditions obtaining on the Witwatersrand.

All types of rock drills are eligible to compete. Drills using compressed air will be supplied with a pressure varying from 60 to 75 pounds per square inch at the working face. The mining regulations require the provision of dust-allaying appliances, and competitors must make provision accordingly.

Two prizes of $20,000 and $5,000 respectively are offered. The trials and the judging will be so arranged as to decide which machine performs the most economical work.

The competition will commence early in 1909, and entries will probably close with the end of 1908. The trials will last about six months, the drills being tested in the first instance on the surface, and those considered suitable being given a more prolonged test underground in several stopes in various mines on the Witwatersrand.

All inquiries should be addressed either to the Secretary, Stope Drill Competition, Transvaal Chamber of Mines, Johannesburg, Transvaal, or to the London Secretary, Transvaal Chamber of Mines, 202 Salisbury House, Finsbury Circus, London, E. C.

In a recent article, Mr. H. M. Hobart says the term "metallic filament lamp" is understood to refer to lamps consuming about 1.2 watt per candle-power, with a life of about 1,000 hours. He thinks, however, that in spite of the enthusiasm naturally aroused by their high efficiency, the drawbacks of metallic lamps, as at present utilized, are not sufficiently realized. The employment of such lamps on 200-volt circuits often means using more candle-power than is actually necessary, with a corresponding loss in economy. The greater concentration of the light in single high candle-power units is also a drawback. It is better to use five 10 candle-power lamps than one 50 candle-power lamp as regards distribution of light.

SOME PHASES OF THE PLANETS IN 1908.

BY PROF. FREDERIC R. HONEY, TRINITY COLLEGE.

The phases and apparent diameters of Mercury, Venus, and Mars are subject to great variations during their revolution around the sun; but owing to their greater distances from the earth, the changes in the apparent diameters of Jupiter and Saturn are not so marked; while those of Uranus and Neptune are barely perceptible.

The brilliance of a planet depends upon its magnitude; its distance from the sun; its distance from the earth; and the extent of the illuminated area which is visible from our planet. On account of their great distance from the earth, the *major* planets always show their illuminated surfaces; therefore the phases are confined to the *terrestrial* planets.

The illustrations here given represent at the dates attached the apparent diameters and some of the phases of the planets during the year 1908. They are all magnified in the same proportion, and the scale selected is large enough to represent Neptune if the planet were visible when it is at its greatest distance from the earth in July. The representation of Neptune does not sensibly differ from his apparent size when he appears as evening and morning star, before and after conjunction with the sun; and when his distance from the earth is about one hundred and eight-six millions of miles greater than in January. The difference between the apparent diameter of Uranus in January and July is a little more marked than in the case of Neptune; due to the fact that the planet is nearer the earth. This effect of greater nearness to our planet is still more apparent in the disk of Saturn, which is here represented without the rings. In September, when Saturn comes to opposition, the maximum apparent diameter shows the effect of the diminution of his distance from the earth.

In the case of Jupiter, the apparent diameter in January, when the planet was at opposition, is very much reduced in August, when conjunction occurs. The apparent diameter of Saturn before and after March 20, and of Jupiter before and after August 17, when the planet in each case appears as evening and morning star, do not differ greatly from those which belong to the date (if the planet were visible) when the maximum distance from the earth is reached.

On January 1 Mars presented the gibbous phase, and was one hundred and twenty-seven millions of miles from the earth. The apparent diameter of the planet is very much reduced from that which it exhibited at opposition in July, 1907. It reaches its maximum distance on August 21, when if it were visible, it would appear as represented in the illustration. This diameter does not differ, however, very much from that shown before and after conjunction, when the planet is evening and morning star. In the last day of the year, Mars presents the slightly gibbous phase.

Venus divides the year into nearly two equal parts, as evening and morning star. She comes nearer the earth than any other planet; and when her minimum distance is reached on July 6, the apparent diameter (if the planet were visible) is represented by the measurement *a b*. On this day, Venus comes within twenty-seven million miles of the earth; but her dark side is toward us, and she is lost in the sun's rays. On January 1, when Venus was 135.2 million miles from the earth, she showed the slightly gibbous phase. During the first half of the year the planet is gaining on the earth at the rate of over half a degree a day; and as a consequence, the apparent diameter rapidly increases. Venus appears as a half moon on

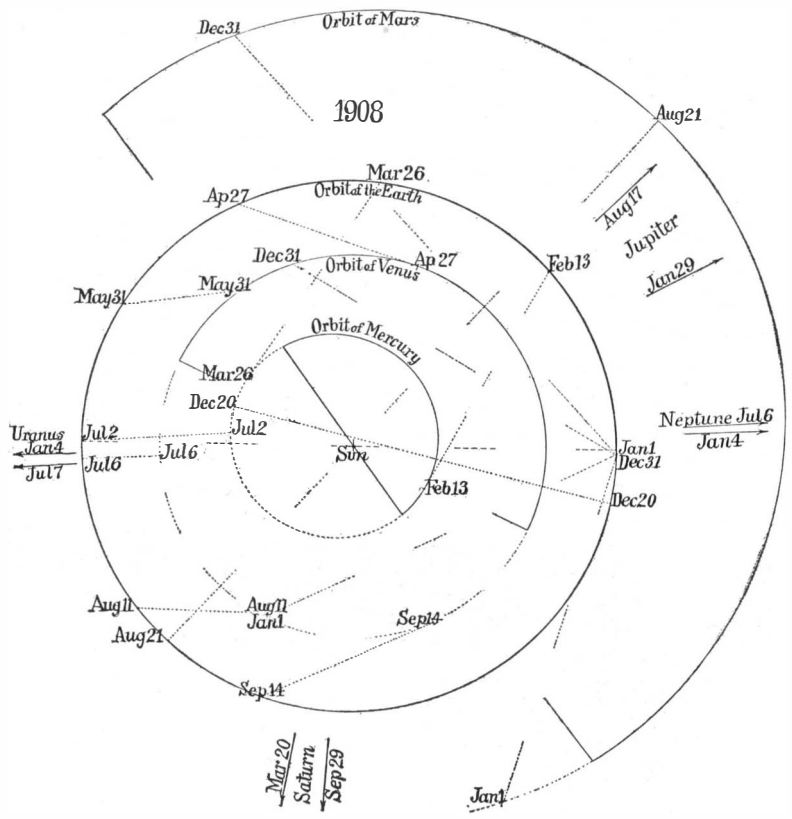

Orbits of the Terrestrial Planets for 1908.

April 27; and her maximum brilliance is reached at the end of May, when she presents the beautiful crescent phase. After this the brilliance diminishes. In August, when Venus is morning star, and rapidly receding from the earth, the crescent phase is repeated, and is again seen to best advantage. The half-moon phase appears on September 14; and December 31, when Venus is gibbous, the apparent diameter of the planet does not differ very much from that of January 1.

Mercury as evening star showed the half-moon phase on February 13; and again as morning star, on March 26. His minimum distance from the earth is reached on July 2, when the apparent diameter of the planet, if projected on the sun's disk, would reach its maximum for this year. Mercury's minimum distance from the earth is not reached on the day of inferior conjunction. The maximum distance is reached on December 20, which does not coincide with the date of superior conjunction. This is due to eccentricity of the planet's orbit. The apparent angular diameter of a planet, or the angle subtended by it, is directly as its real diameter, and inversely as its distance from the earth. In the computations of the diameters of the planets in the illustration, the unit distance employed is the mean distance between the sun and the earth, i. e., 92.9 million miles. At this distance, 450 miles subtends an angle of one second. One example will suffice to show how the apparent diameter of a planet is determined.

Neptune's diameter is 34,800 miles; and $\frac{34,800}{450} = 77.3$ sec. At a unit's distance from the earth, Neptune would subtend this angle. But at opposition, the planet is twenty-nine times the distance between the earth and sun; while at conjunction this distance is increased by the whole diameter of the earth's orbit. Therefore, the apparent diameter of the planet at opposition is $\frac{77.3}{29} =$ 2.66 sec.; and at conjunction $\frac{77.3}{31} = 2.49$ sec. The table gives the diameter of each planet, and its distance from the earth at the dates selected in the illustrations. This distance is given in terms of the mean radius of the earth's orbit or semi-major axis; and also in millions of miles. In the plot of the orbits of the minor planets, the position of the earth is indicated at each date, and a straight line is drawn to the planet's position on that day. The length of this line corresponds with that given in the table. Since the year 1908 has 366 days, the earth in the plot on December 31 comes very nearly to the same position as that of January 1.

TABLE 1908.

Planet.	Diameter Miles	Date.	Mean Radii of Earth's Orbit	Distance in Millions of Miles
Neptune	34,800	January 4th	28.96	2690.3
		July 6th	30.96	2876.5
Uranus	31,900	January 4th	20.50	1904.0
		July 7th	18.53	1721.0
Saturn	73,000	March 20th	10.52	977.0
		September 29th	8.46	780.0
Jupiter	86,500	January 29th	4.32	401.1
		August 17th	6.37	592.2
Mars	4,230	January 1st	1.37	127.4
		August 21st	2.68	248.6
		December 31st	2.12	197.0
Venus	7,700	January 1st	1.46	135.2
		April 27th	0.71	65.7
		May 31st	0.44	41.2
		July 6th	0.29	26.9
		August 11th	0.45	41.4
		September 14th	0.70	65.0
		December 31st	1.41	130.9
Mercury	3,030	February 13th	0.95	88.1
		March 26th	0.88	82.1
		July 2d	0.56	52.3
		December 20th	1.45	134.4

A Detector of Ultra-violet Rays.

C. Schall describes, in the Photographische Wochenblatt, a photo-chemical method of detecting the presence of ultra-violet rays, based on the fact that these rays and no others produce a blue coloration on paper saturated with a solution of p-phenylene diamine. The paper can be prepared in, and freely exposed to, diffused daylight which merely gives it a pale gray tint. An instant's exposure to the rays of a Heraeus quartz lamp suffices to produce the blue coloration. The effect is prevented by the interposition of a thick plate of ordinary glass, which stops the ultra-violet rays. The paper is prepared by floating it on a solution of 1 part by weight of p-phenylene diamine in 14 parts of water and 4 parts of a 40 per cent solution of nitric acid. The paper should be dried quickly by the application of heat and used immediately.

The United States Geological Survey has recently issued a report dealing with the subject of smoke prevention, in which it is concluded that coal should be supplied to furnaces in small quantities at frequent intervals, and the air supply should slightly exceed the theoretical amount required for combustion. The temperature in the furnace should be sufficiently high to ignite the gases given off from the fuel, and boiler rooms should be managed by properly trained men.

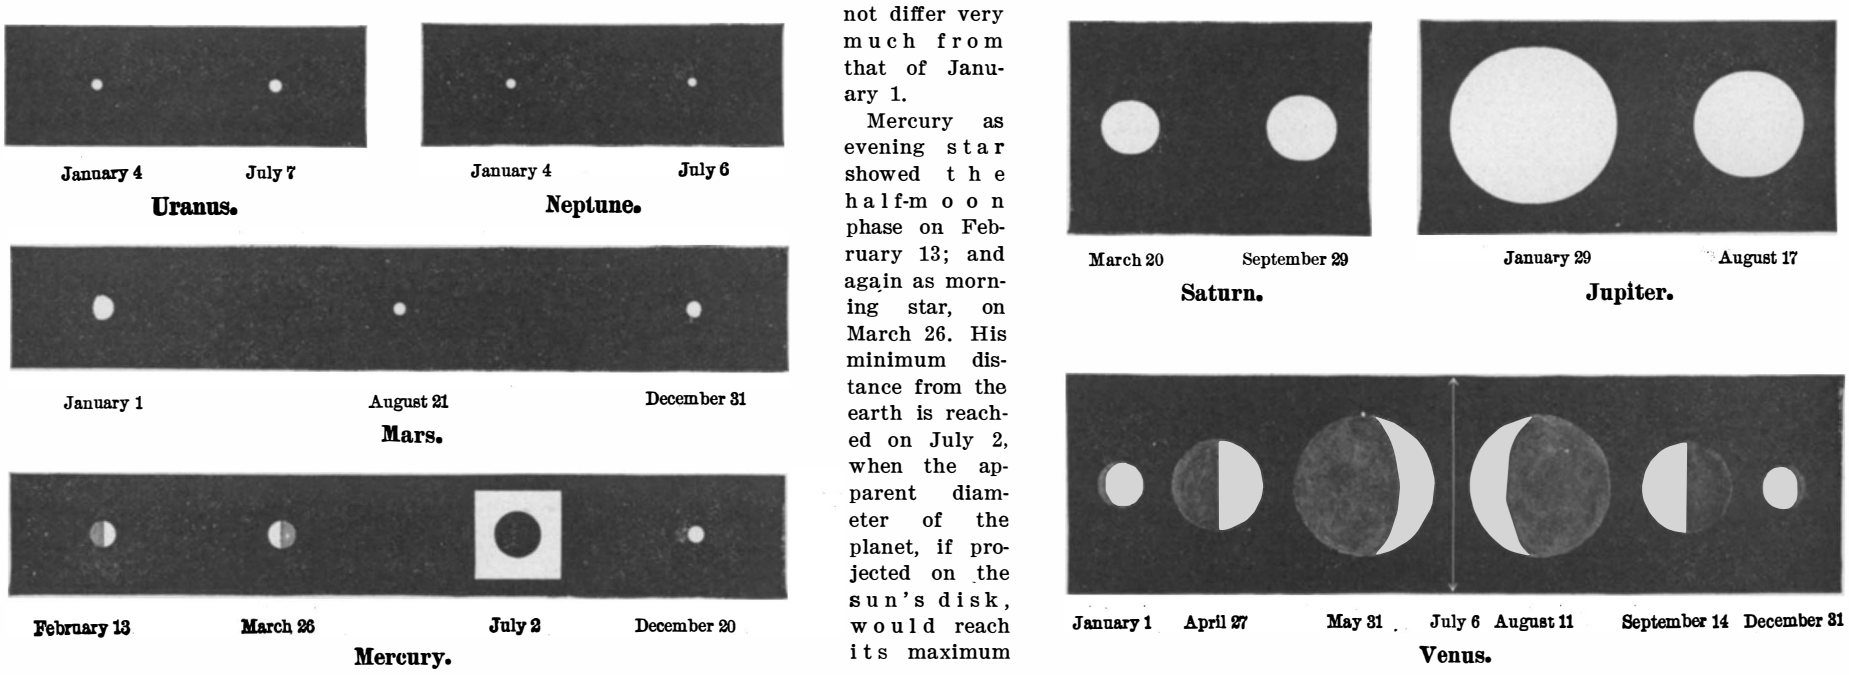

PHASES AND APPARENT DIAMETERS OF THE PLANETS DURING 1908. THE FIGURES ARE DRAWN TO THE SAME SCALE.

AMERICAN TURBINES FOR THE JAPANESE ARMORED CRUISER "IBUKI."

The accompanying photographs of two large turbines now being built in the shops at the Fore River Shipbuilding Company should possess a special interest for American readers. They will form the motive power for the latest of the new Japanese armored cruisers, the "Ibuki," a fine vessel of 14,600 tons displacement and 22 knots speed, which is now nearing completion at the yards at Kure, Japan. The significance of these engines lies in the fact that they are the first large marine turbines to be installed in a Japanese warship; and it is a distinct indorsement of the progress made in this country in the development of the turbine, that such an astute people as the Japanese should have selected the Curtis type for the motive power of so valuable a ship. The "Ibuki" and her sister ship "Kurama" are identical vessels, with a length of 450 feet, a beam of 75½ feet, and a mean draft of 26 feet. We understand that the "Kurama" is being equipped with reciprocating engines, and therefore in these two vessels will be afforded an opportunity to test the respective efficiency of the two types of motor.

The later ships of the Japanese navy, which are being built by the Japanese themselves, are distinguished, like the ships of our own navy, by the unusually heavy batteries which they carry. Thus, the "Ibuki" mounts four 45-caliber 12-inch guns in two turrets; eight 8-inch 45-caliber guns in eight single turrets; and fourteen 4.7-inch guns, ten of them in a central battery, and four in casemates, two at the bow and two at the stern. The ships are protected by a 7-inch belt and a 2-inch armor deck. The 12-inch gun turrets have 7 inches protection, the 8-inch gun turrets 6 inches protection, and the 4.7-inch guns are mounted behind 5 inches of armor.

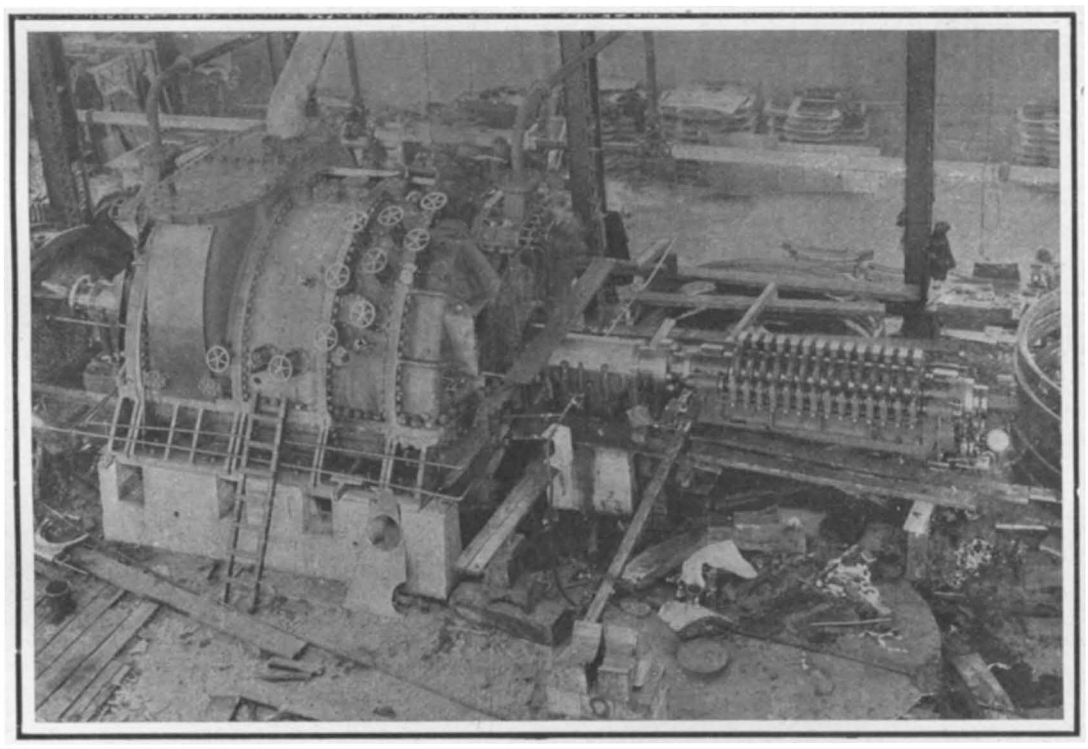

Twenty-seven Thousand Horse-Power Turbines for the Japanese Cruiser "Ibuki."

The motive power of the "Ibuki" consists of two turbines, which are designed to develop a normal horse-power of 24,000, sufficient to drive the "Ibuki" at 22 knots speed. They are intended, however, to develop a maximum overload horse-power of 27,000, which should suffice to give a speed of nearly 23 knots. The rotor is 144 inches in diameter. The casing has an outside diameter of 14 feet, and a length over all of 17 feet. The weight of the two turbines together is 360 tons.

Each turbine consists of a cast-iron cylindrical casing divided by dished diaphragms into a series of separate compartments. In each compartment or "stage" there is a separate wheel, which carries on its periphery three rows of moving buckets (for reasons later described the first wheel has four rows). The wheels are all mounted on a hollow steel shaft carried by two bearings. Where the shaft passes through the diaphragms, they are provided with bronze bushings having a small clearance, thus preventing appreciable steam leakage from one stage to the other. Where the shaft passes out through the ends of the casing, it is provided with carbon stuffing boxes, which prevent steam leaking out at the ahead end, or air leaking in at the back end where a vacuum exists.

The stuffing boxes are supplied with steam in the space between the carbon packing, to prevent air leaking in and lowering the vacuum. They are also drained to the fourth-stage shell.

Cast-steel steam chests for ahead and astern running are attached to the front and back casing heads as shown, and are flanged for the main steam pipes. The nozzles for each stage are bolted to the diaphragms, the diaphragms having steam-port openings cast in them to allow the steam to pass through to the nozzles.

Maneuvering is accomplished by means of two lever operated balanced throttle valves, each taking steam from the main steam pipe, and one delivering to the ahead steam chest and the other to the astern steam chest. There are seven ahead wheels and two reverse wheels. The reverse wheels are mounted in the after end of the casing, and under ordinary ahead running they are in a vacuum, and therefore do not waste power by steam friction. They are similar to the ahead wheels, except that the blades are reversed. To reverse when going ahead, the ahead throttle valve is shut and the reverse throttle valve opened, which is easily and quickly accomplished by the operating levers of the two throttle valves.

Drain pipes are provided, connecting each stage with the next, so the condensed steam in any stage will pass to the next one of lower pressure, and there give up a part of its heat to do useful work. The exhaust chamber drains to the condenser, and the discharge is assisted by a small steam ejector. A regular marine thrust bearing is attached to the forward end of the turbine shaft. In addition to taking the propeller thrust, this bearing also maintains the proper axial position of the rotor, so that the axial clearance of the blades is correct. This clearance is one-tenth of an inch on the first wheel, and increases to one-quarter of an inch on the seventh wheel. The thrust is put at the forward end, so that any unequal expansion of the shaft and casing will be allowed for at the aft end where the clearance is largest. This axial clearance is very ample to allow for all unequal heat expansion that may occur, and any mechanical irregularities, and leave sufficient leeway for adjustment.

To allow for the increased volume of the steam as it expands in passing from stage to stage at lowering pressures, the lengths of the blades are increased, and also the arc of the nozzles is increased, thus giving greater area of passage in each succeeding stage. Also, in any one stage, the blade lengths are increased in each succeeding row, because the velocity falls as the steam passes from row to row, although it is at practically constant pressure throughout the stage.

In order to keep the pressure in the shell as low as possible, the pressure distribution is arranged so that one-fourth of the available energy of the steam is expended in the first stage, and one-eighth in each of the other stages. This requires the first-stage nozzle to be of the expanding type, but all the other nozzles are of the parallel-flow type. Also, the first-stage wheel is provided with four rows of buckets instead of three, as on the other wheels, since the greater energy drop produces greater velocity of the steam jet from the nozzles, which requires more rows of buckets to properly absorb the energy at the bucket speed used. This arrangement makes all the ahead wheels except the first operate under eight-stage conditions. The principal advantages of the Curtis design of marine steam turbine are as follows:

Small number of blades.

Large clearance around blades.

Strong mechanical construction of blading.

Economy at reduced speed, without cruising turbines.

Interior of shell not subjected to full steam pressure.

Low revolutions for given horse-power.

Absence of dummy pistons and packing.

The small number, large clearance, and strong construction of the blades make blade stripping practically impossible, and no case has occurred.

By the use of valves on the nozzle openings of the diaphragms, the proper steam pressure distribution can be maintained at reduced steam flow, thus keeping up the economy at low speed of vessel, except, of course, for the unavoidable loss due to lower revolutions and dispensing with cruising turbines.

Full steam pressure comes on the steam chest only, which is a comparatively small steel casting. The greatest pressure in the turbine shell is less than one-third the working steam pressure. This permits high steam pressure to be used, and large turbine diameter in comparison to the power. It also reduces expansion difficulties.

The comparatively low revolutions permissible for a given power without sacrifice of economy, or excessive weight, allows the twin-screw arrangement to be used instead of three or four screws. Also, other conditions being the same, lower revolutions will give a higher efficiency of the propeller. Low revolutions also permit the use of turbines in comparatively (for turbine vessels) low-speed vessels.

Absence of dummy pistons and their packing eliminates the leakage of high-pressure steam and makes the economy independent of any adjustments, so that the initial economy will be maintained continuously and will not be affected by any wear.

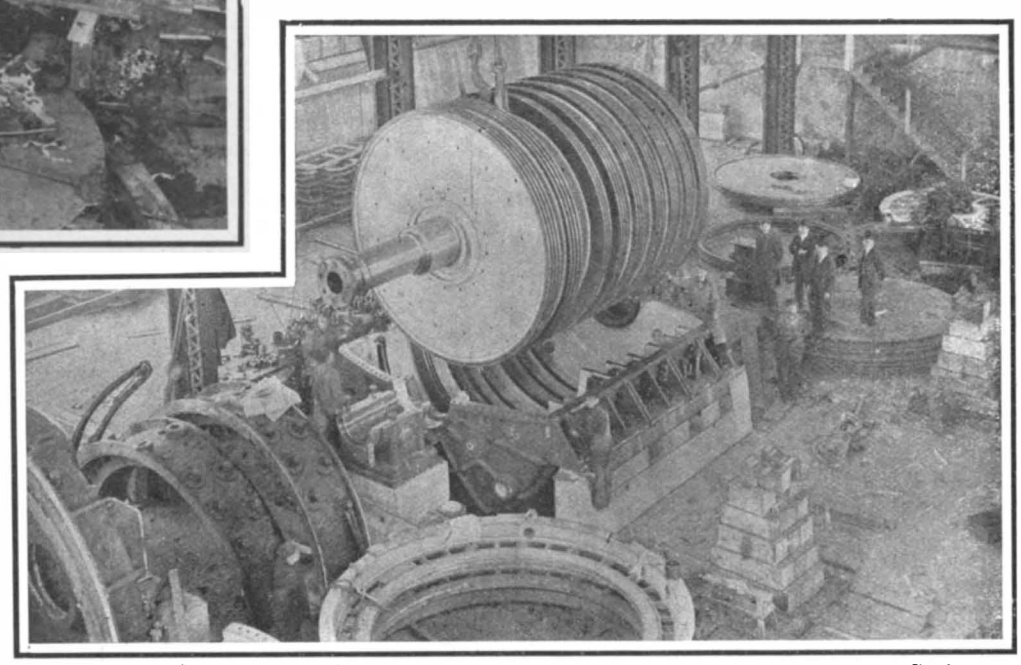

The Rotor and the Lower Half of Casing. Rotor, 144 Inches in Diameter. Casing Measures 14 Feet in Diameter by 17 Feet in Length.

AMERICAN TURBINES FOR THE JAPANESE ARMORED CRUISER "IBUKI."

An Old-Time "Taxi-cab."

The taximeter cab, or "taxi-cab" as it is called in New York, is quite the latest thing in the streets of our modern cities. And yet the old adage "there is nothing new under the sun," is peculiarly applicable to what we are all inclined to imagine is the product of the twentieth-century brain. An Oriental contemporary (Ostasiatische Lloyd) states that the Chinese can prove, from one of their old richly illustrated historical works, that already in the eleventh century they had invented and were using a "giligulicha" (or "counting mile drum car") which possessed many of the features of the modern taxicab. Judging from the several illustrations of the "giligulicha," contained in the famous "Tsan-thu-hae" collection of pictures, the vehicle had one single pole or shaft, ran on two wheels, and consisted of two stories. In each of these compartments or divisions there was a wooden figure holding a mallet in the right hand; these mallets were arranged to strike upon a drum in the lower story, and upon a gong in the upper one. When the vehicle had traversed a certain predetermined distance, the lower figure struck the drum with its mallet, whereupon a cog-wheel made a revolution. When a distance of ten miles had been covered the upper figure struck the gong with its mallet. In some cases this Chinese taximeter car was also fitted with a compass which, owing to the total lack of landmarks and signposts, was of great value to the Celestial "chauffeur" of that time. A magnet was also provided; it was located in a small box, and influenced a block upon which there was fastened a small jade or wooden figure the outstretched arm of which always pointed due south.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending April 14, 1908.

AND EACH BEARING THAT DATE

[See note at end of list about copies of these patents.]

Adding machine, S. G. Cook 884,468
Adding machines, paper rewind mechanism for, S. J. Davidson 884,721
Advertising novelty, A. G. Hume 884,822
Aeroplane, M. Vaniman 884,432
Air brake, W. A. Weant 884,694
Air brake, compressed, A. Chandeson 884,364
Ammonia, producing, O. Serpek 884,423
Amusement apparatus, W. H. Bryant 884,462
Animal trap, A. Arnesen 884,453
Ant trap, M. T. Howard 884,928
Automatic coupling, E. De Vlieger 884,801
Automatic fender, J. E. Palmer 884,413
Axle and wheel, center drive, J. & H. McGeorge 884,752
Axle straightener, J. Q. Taylor 884,429
Back and head rest, Spotz & Spencer 884,534
Bag frame, J. F. Kitchell 884,593
Bag-holding device, Cusick & Scott 884,798
Bag lock, hand, J. J. Woolfenden 884,787
Baling press, G. W. Shepard 884,530
Barrel, metallic, S. M. Wright 884,450
Batteries, depolarizer for galvanic, E. W. Jungner 884,664
Beam, trussed, C. H. Williams, Jr. 884,445, 884,446
Bean puller, R. H. Beckwith 884,887
Bearing, shaft, Emmet & Dickinson 884,477
Bed, baby, W. S. Lindsey 884,509
Bed, invalid, E. A. Keasey 884,393
Bed pan, E. Nelson 884,842
Bedclothes clamp, D. Martin 884,832
Beet topping and harvesting machne, F. Lotter 884,673
Belt-making machine, E. A. Usina 884,544
Belting and machinery therefor, manufacture of leather, E. F. Sargeant 884,528
Berry box, P. Henrich 884,820
Binder, paper, C. C. Newson-Smith 884,409
Binder, temporary, J. Ahlberg 884,351
Biscuit-molding means, H. W. Mackenzie 884,746
Bit stock, folding, E. Requillart 884,856
Block. See Concrete block.
Bobbin holder, G. & N. Boissonneault 884,356
Bobbin holder, A. E. Rhoades 884,759
Boiler cleaner, steam, I. C. Gray 884,728
Boiler flue cleaner, R. W. Hamann 884,818
Bolster stake, J. Heimlicher 884,923
Book holder, N. S. Davis 884,722
Book, sales, A. F. Staples 884,623
Boot and shoe, C. J. Walker 884,880
Bottle holder, K. Bode 884,355
Bottles, jars, and other receptacles, closing device for air-tght, C. H. Gray 884,378
Bowling ball and handle, F. J. McGuane 884,991
Box cover fastener, G. Glaus 884,481
Box lock and brace, combined, G. S. Francis et al. 884,377
Boxes, manufacture of cardboard, R. D. Haworth 884,384
Bracket support, M. E. La Berge 884,503
Brake beam, C. H. Williams, Jr. 884,444
Brake bead, C. H. Williams, Jr. 884,443
Brake lever hanger, W. T. Walton 884,881
Brick molding apparatus, P. Wernicke 884,440
Bricks by hand, clamp for carrying, W. F. Kerr 884,494
Brooder, J. Lardinois-Pigeon 884,935
Bucket, S. J. Sikes 884,870
Bucket dumping attachment, mine, M. M. Callaghan 884,363
Bucket, self closing dumping, G. L. Stuebner 884,687
Building material, J. Stanley 884,959
Burner, G. R. Shanklin 884,869
Cabinet, G. Range 884,758
Cabinet or nest of trays, G. Strong 884,428
Cabinet, retouching, J. M. Stonestreet 884,535
Cabinet, sectional knockdown, J. F. Wilmot 884,550
Calendar, C. E. Rowe 884,861
Calendar, perpetual, S. Sipser 884,532
Can spout, G. J. Richard 884,761
Candlestick, miner's, J. R. Blake 884,632
Cane loader, W. W. Lemmon 884,938
Car, articulated, M. Rounds 884,420
Car bolster and draft rigging, W. D. Lowry 884,596
Car curtain fixture, open, G. E. Gilman 884,480
Car fender, J. F. Risdon 884,683
Car passenger register, street, E. M. & G. A. Beard 884,557
Car, semi-convertible, W. S. Wright 884,788
Car stake and attaching means therefor, J. A. Toomey 884,778
Car step, E. P. Bergman 884,889
Carpet stretcher, R. J. Tanner 884,776
Carrier switch, overhead, G. E. Hauptman 884,383
Carrier system, S. H. Libby 884,595
Cart, two-wheeled, J. White 884,695
Cash register, F. H. Trevellian 884,627
Cash register, T. Carney 884,639, 884,640
Casks with a coating, providing, R. Rostock 884,993
Casks with a protective coating, providing cement or concrete, R. Rostock 884,994
Cement block molding machine, F. Cherny 884,713
Cementitious articles, molds for making, D. A. Keogan 884,931
Chain link, Plunkett & Silvers 884,415
Chain link blanks, etc., apparatus for carrying and heating, P. H. Standish 884,427
Cheese cutters, table for, T. V. Garlock 884,810
Chemical process, Pellew & Whipple 884,756
Churn, F. E. Andrews 884,452
Cigars, manufacture of, J. B. De Lery 884,982
Circuit closer, thermostatic, J. O. Woods 884,969
Clamp, C. M. Sorensen 884,772
Clasp. See Garment clasp.
Clock movement, G. J. B. & E. W. Sylvan 884,961
Clothes pin, F. V. Polakoskey 884,680
Clutch, friction, A. & G. A. Schwehr 884,766
Coach, overland steam, R. L. Woods 884,882
Coin collector, E. B. Craft 884,470
Coin controlled apparatus, J. A. Weser 884,441
Collar pad, horse, W. F. Sachse 884,527
Concrete block, J. R. King 884,498
Concrete blocks, device for carrying and setting, D. S. Wolgamott 884,434
Concrete construction, marine, J. T. Bertrand 884,354
Concrete mixer, P. A. Koehring 884,667
Concrete mixing apparatus, J. F. D. Withrow 884,698
Concrete pile covering, F. A. Koetitz 884,668
Concrete wall mold, J. Horsfield 884,733, 884,734
Construction, method of, J. C. Meem 884,990
Conveyer, G. Schubert 884,618
Cooking utensil, J. H. Cowhig 884,718
Cooking utensil, F. B. Senseney 884,767
Copy holder, J. M. Bainer 884,886
Corkscrew, W. J. Stanton 884,873
Corn sheller attachment, G. B. Nelson 884,944
Cotton bleaching apparatus, seed, J. B. Brennan 884,359
Crank pin turning machine, M. H. Westbrook 884,966
Crate, E. Lehmann 884,508
Crates or coops, water trough for poultry, G. J. Cook 884,716
Crossing gate, automatic electric, F. G. Layher 884,825
Crossing, movable point, W. B. Cooke 884,717
Crown and bridge work, C. M. B. Boos 884,977
Culinary device, W. H. Terry 884,688
Cultivator attachment, M. L. McClure 884,676
Current generator, alternating, C. A. Lohr 884,831
Current regulator, electric, A. W. Brice 884,458
Curtain stretcher, J. L. Bragdon 884,999
Cushion, E. G. Budd 884,706, 884,707
Cushion, Budd & Wolle 884,708
Cushion, E. G. Budd 884,709
Cushion, H. S. Hale 884,730
Cuspidor, A. E. Simpson 884,871
Cut-out, J. H. Booth et al 884,978
Cutting and marking machine, Risting & Kabatchnick 884,762
Derrick, W. Kirtland 884,666
Developing apparatus, A. C. Hayden 884,922
Dipper handle, M. E. & W. Gray 884,485
Display apparatus, J. C. Fox 884,575
Display holder for gems, R. L. Wood 884,968
Display stand or rack, knockdown, G. L. Page 884,848
Dividing apparatus, commodity, Nicklin & Campau 884,845
Door check, W. T. Adams 884,789
Door check, automatic, J. Wirgman 884,697
Draft equalizer, C. J. Tobin 884,542
Draft equalizer, G. Mosmeier 884,602
Draft rigging, D. A. Hitchcock 884,585
Drafting instrument, circle, Nichols & Hogan 884,844
Drag, road, F. H. & F. S. Beach 884,352
Drawer alarm, money, S. D. Newman 884,843
Drawer carrier, G. Boydelatour 884,457
Drawer for cabinets, etc., Ekedahl & Sampson 884,476
Drawer, furniture, W. Grattan 884,727
Drawers for cabinets, etc., suspension for, Ripson & Sampson 884,526
Drawers of cabinets, etc., support for, Ripson & Sampson 884,525
Drawing frames, sliver evening mechanism for, Westcott & Potter 884,442
Drier, K. F. Snow 884,771
Drilling apparatus, G. R. Rich 884,760
Drilling machine, Seib & Weston 884,529
Driving wheel and gear rim connection, G. L. Wall 884,693
Duplicating apparatus, E. J. Brasseur 884,704
Dust absorbing compound and making same, H. C. Beman 884,558
Educational appliance, G. N. Sabin 884,863
Electric heater, E. Thomson 884,540
Electric machines, regulation of dynamo, C. E. Barry 884,555
Electric spark gap for interrupters, T. B. Kinraide 884,499
Electric switch, H. H. Berry 884,353
Electric switch, A. R. Swoboda 884,775
Electric switch, automatic, A. H. Miller 884,514
Electrical oscillations, detecting, G. Marconi 884,988
Electrode for reversible galvanic batteries, E. W. Jungner 884,930
Electrolytic call, G. A. Gabriel 884,653
Elevator safety catch, W. A. Dorsey 884,908
Emulsions, manufacture of, J. P. Van der Ploeg 884,878
End gate, J. W. Fisher 884,916
End gate for press boxes, W. C. Le Gallais 884,827
End gate locking mechanism, A. T. Correll 884,898
Engine cylinder, gas, P. Schwehm 884,995
Engine starting mechanism, gas, P. Schwehm 884,619
Engine stop, Blanck & Beckerdite 884,455
Engines, assistant cylinder for steam, L. D. Lovekin 884,510
Engines, locking device for front plate stripping doors of carding, Myerscough & Gornall 884,405
Envelop and inclosure, combination, J. P. Keegan 884,394
Excavating machine, F. M. Johnson 884,492
Excavating machine, E. O. Rood 884,764
Excavator, H. W. Blaisdell 884,559
Excavator, J. Kerwin 884,932
Excavator, C. Suiter 884,960
Excavator, power, J. B. Webber, Jr. 884,439
Eyeglasses, H. W. Derrick 884,368
Fabric. See Wire fabric.
Fan deflector, H. M. Carroll 884,894
Fan or ventilator, S. Timokhovitch 884,876
Faucet, M. P. Elgen 884,648
Feed and litter carrier, H. L. Ferris 884,649
Feed water heater, G. W. J. White 885,005
Feed water regulator, C. A. Dunham 884,913
Feeder, G. B. Warren 884,436
Feeder governor, C. T. H. Bond 884,357
Fence post mold, C. F. Kyser 884,502
Fencing, wire, W. H. Griffith 884,379
Fiber separating machine, H. E. Bryant 884,635
Fibers, preparing, K. Matthews 884,401
File, L. F. Boedecker 884,997
File and index, H. H. Knapp 884,823
Filing case, W. K. Holman 884,659
Filter, G. Schlemmer 884,765
Filter, automatically operated, O. H. Fairchild 884,914
Filter for exhaust filtration, sectional, H. P. Crush 884,797
Fire alarm system, telephone, W. S. McLewee 884,607
Fire door fastener, R. B. Lawrence 884,937
Fire starter, L. C. Hermann 884,583
Floor dressing apparatus, L. H. Veronneau, dit Vernon 884,433
Flower pot, illuminated, C. V. Helmschmied 884,924
Flue cleaner, C. Nuhring 884,755
Flue dust, utilizing, E. F. Wood 884,970
Fluid heater, electrical, Seymour & Ball 884,424
Flushing apparatus, automatic periodic, J. W. Grantland 884,483
Flushing receptacle, means for, J. W. Grantland 884,484
Fly trap, S. A. Hackley 884,487
Food compound, R. H. McFarland 884,606
Foot bolt for holding doors, H. R. Shafer 884,768
Forming machine, W. C. Burrell 884,464
Fruit picker's platform, C. A. McDermott 884,839
Funnel and dipper, combined, H. H. Hanson 884,489
Furnace apparatus, blast, W. Kennedy 884,665
Furnace stoking device, automatic, T. E. Murray 884,603
Fuse holder for electric circuit conductors, P. McDonald 884,519
Fusing materials, G. F. Brindley 884,563
Game apparatus, G. N. McEvoy 884,605
Game apparatus, E. B. Mason 884,674
Garment, B. Galland 884,479
Garment clasp, J. M. Siner 884,425
Garment hanger, A. Schlang 884,616, 884,617
Garment holder, A. Haviland 884,657
Garment supporter, C. Ringwald 884,858
Garment, underwear, C. A. Gould 884,815
Gas burner, T. B. Harrison 884,819
Gas burner, incandescent, A. G. Meker 884,834
Gas, making, A. M. Gow 884,655
Gas producing furnaces, fuel feeding device for, S. B. Sheldon 884,620
Gate, C. C. Cohee 884,467
Gate, D. E. Stetler 884,533
Gate, A. Hessel 884,584
Gearing for hoists, transmission, A. J. Thomas 884,777
Gin saw filing machine, F. M. Sisk 884,770
Glassware, apparatus for fire finishing and polishing, I. H. Freese et al 884,478
Grader, road, W. S. Livengood 884,396
Grader, road, D. W. King 884,497
Grain and seed cleaning and grading machine, J. H. Hoover 884,660
Grain cleaner, C. A. Wright 884,551, 884,552
Grain drier, W. Wilson 884,696
Grate for open fireplaces, C. F. Salter 884,615
Guide lubricator, J. H. Rush 884,957
Gum wrapper, chewing, C. B. Davis 884,800
Gyroscopic top, A. B. Bly 884,975
Hammer, foot power, A. H. Wertz 884,786
Hand shears, Nicholson & Rude 884,410
Harness attachment, A. L. Lewis 884,829
Harrow and roller, combined, A. Hayes 884,658
Harvester, corn, R. B. Brewer 884,891
Harvester, potato, H. C. Hendrick 884,386
Harvester reel, F. S. Chase 884,465
Hat frame forming device, wire, W. M. Jameson 884,588
Heated tools and vessels, automatic indicator or thermoscopic signal for, J. I. Ayer 884,973
Heater, L. L. Law 884,395
Heel attaching machine, J. H. Pope 884,524
Heel, boot and shoe, W. C. Turpel 884,780
Heel nailing machine, B. F. Mayo 884,513
Hod, B. M. Burdett 884,566
Hogs from scalding vats, device for ejecting, W. R. Perrin 884,608
Horse detacher, R. Coates 884,795
Horseshoe, non-slipping, A. Lang 884,504
Horseshoes, means for making, M. S. Reigh 884,855
Hose, H. T. Bragg 884,634
Hose coupling, C. F. Browne 884,461
Hose uncoupling, automatc, W. S. Bowness 884,561
Hot water circulating system, G. A. Triggs 884,779
Hub, metallic vehicle, P. Reinhardt 884,612
Husker, J. A. Ramsey 884,609
Hydraulic jack, G. Apgar 884,884
Hydraulic motor, R. B. Goodrich 884,654
Ice cream scraper, R. Nielsen 884,711
Ice tongs, J. L. Willams 884,448
Igniting device, electric, R. E. Hardy 884,731
Indicator. See Lock indicator.
Injector, W. H. Stirling 884,625
Insect trap, N. W. Mills 884,403
Insole, G. E. Mann 884,985
Insulating compound, N. Booth 884,456
Insulator, hanging, W. G. Clark 884,641
Internal combustion engine, F. F. Miller 884,402
Internal combustion engine, C. R. Radcliffe 884,853
Ironing machine for laundry work, N. Garst 884,811
Jack. See Hydraulic jack.
Jar closure, P. J. Layman 884,826
Jar cover, E. F. Baxter 884,791
Jewel bar, H. W. Fishel 884,979
Journal bearing, A. H. Sassaman 884,866
Journal box and lid, J. Goettel 884,918
Labeling device, S. Detmers 884,573
Lacing hook, W. T. Richards 884,682
Lamp with inverted incandescent gas burners, M. Graetz 884,816
Lamps, machine for making incandescent, W. R. Burrows 884,568
Last, divided, W. C. Porter 884,757
Latch, I. W. Herman 884,925
Legging, E. Le Bosse 884,741
Leuco derivative of the gallocyanin series, W. Lommel 884,745
Linoleum, inlaid, T. T. Hollinger 884,732
Linotype machines, signal attachment for, D. S. Knox 884,934
Liquid depth gage, H. E. Dobson 884,370
Liquids, apparatus for automatically discharging, A. Priestman 884,522
Lock, J. Phillips 884,414
Lock, A. Huber 884,586
Lock and latch, combined, W. C. Brown 884,460
Lock indicator, door, Voight & Caley 884,996
Locomotive fire boxes, attachment for promoting fuel combustion in, F. L. Holcomb 884,926
Loom filling replenishing mechanism, G. O. Draper 884,723
Loom multiplier mechanism, E. H. Ryon 884,862
Loom, narrow ware, E. H. Ryon 884,614
Loom shedding mechanism, E. H. Ryon 884,613
Lumber loading devce, R. E. Coad 884,642
Lunch box, folding, E. Lapointe 884,824
Mail bag catching and delivering apparatus, E. F. Hull 884,662
Mail box signal, W. H. Voss 884,964
Mail catcher and deliverer, railway, W. T. Sebree 884,868
Mail crane, A. C. McCord 884,407
Mail matter stamping and sealing machine, Morris & Hall 884,837, 884,838
Mail pouch delivery device, W. A. Virgils 884,782
Malt by means of chlorid of lime or other hypochlorite salts, preparing, J. Effront 884,725
Manure spreader, B. E. Miller 884,515
Matches and stoppers, composition for, C. H. Bach 884,885
Matches, making bodies for wax, T. Larn 884,506
Measuring instrument, electrically-synchronized time, Bonniksen & Chandler 884,358
Measuring the degree of exposure of a selenium cell, A. Korn 884,501
Meat hook, F. D. Broga 884,360, 884,361
Mechanical movement, C. F. Jones 884,590
Mechanical movements, casing for, J. Edens 884,647
Metal into flakes, forming, P. F. Cowing 884,571
Metal, manufacture of expanded, N. E. Clark 884,714
Metal solvent, E. C. Broadwell 884,705
Metallic compounds, electrolytic reduction of, H. Rodman 884,763
Milk cooler, H. C. Root 884,860
Milk cooling apparatus, J. Tillotson 884,689
Milking machine, W. J. Uebler 884,781
Mirror, J. C. May 884,512
Mold, E. M. Walker 884,965
Motive power engine, E. Thomson 884,539
Motor control system, electric, L. A. Tirrill. 884,541
Mower, lawn, J. H. Frey 884,651
Music recorder, W. Heilbrunn, et al 884,580
Musical instrument, W. F. Fletcher 884,806
Musical instrument of the accordion type, A. J. Engelm nn 884,373
Musical instruments, duplex tracker-board for automatic, M. Clark 884,366
Nail-making machine, Grisler & Alexander. 884,577
Necktie turner, W. J. Dryden 884,910, 884,911
Nest frame, hen's, C. F. Lucas 884,399
Nitrogen oxids from air, apparatus for making, Grau & Russ 884,920
Nitrogen oxids from air, making, Grau & Russ 884,919
Nut lock, H. E. Shrock 884,531
Nut lock, C. Kesler 884,933
Nut lock, L. J. Lindsay 884,983
Oil spreader, W. M. Murray 884,943
Ore concentrator, submerged, C. L. Buckingham 884,636
Ores, separating the liquid from the solid portions of treated, E. P. Lynch 885,004
Ornamental article, R. W. Booth 884,998
Overflow gate, automatic, H. A. Brooks 884,564
Package for cotton batting, D. F. Fowler 884,574
Packing case, sheet metal, A. T. Kruse. 884,669, 884,670
Pad. See Collar pad.
Paint and making same, mixed, W. F. Doerflinger 884,475
Pasting machine, J. R. Houchin 884,927
Pattern, tailor's, G. Madeo 884,940
Pedal, folding, T. Danquard 884,643
Pen and pencil holder, E. L. Sands 884,865
Pen, fountain, F. J. & A. Oberdoerster 884,412
Penholder, R. E. Peickert 884,849
Penholder, W. Rittweger 884,859
Pencil sharpener, N. T. Kesler 884,495
Perambulators, canopy top attachment for, O. N. Turner 884,543
Perch, poultry, C. F. Lucas 884,398
Photograph printing frame, R. Du Perrex 884,804
Photographers, telementer for the use of, F. W. Riches 884,955
Photographic printing apparatus, P. Latta 884,740
Photometer, J. P. Meyer 884,835
Pianissimo device, H. L. Decker 884,903
Piano hammers, making felt for, J. Marson. 884,597
Piano violin, G. Walch 884,785
Picture hanger, L. Thomas 884,538
Pile-driving machine, R. F. Bennett 884,631
Piling, M. R. Vanderkloot 884,545
Pin and pin joint, A. Kilstrom 884,496
Pin fastener, I. Redles (now by marriage I. R. Shill) 884,611
Pins, nails, and the like, apparatus for filling packing drawers with, C. A. Leuenberger 884,743
Pipe bracket or support, E. L. Howe 884,661
Pipe coupling, S. R. Dresser 884,371
Pipe coupling, G. W. Mason 884,749
Pipe cutter, A. Strong 884,536
Plant protector, E. C. Dawson 884,473
Planter, Atterbury & La Plant 884,790
Plaster boards, molding table for making, G. Rader 884,953
Plaster or composition board, G. Rader 884,954
Plating metallic bodies, G. A. Goodson, reissue 12,779
Plow, A. M. Chase 884,365
Plow, T. H. Fuller 884,652
Plow, power driven, A. W. Harpstrite 884,490
Plug, separable attachment, O. E. Kenney. 884,981
Plunging furnace, Z. Szpor 884,875
Pool ball rack, H. O. Yewell 884,699
Post card shield, P. H. Borden 884,701
Power purposes, utilizing hot liquids for, A. C. E. Rateau 884,417
Preserving fish and other alimentary substances, receptacle for, F. Bringk 884,892
Pressure gage, J. S. Kennedy 884,592
Printing, H. L. Reckard 884,418
Printing from films or plates, machine for, C. G. Morgan 884,516
Printing plate making apparatus, J. O. De Wolf 884,369
Printing press folding apparatus, H. P. Husby 884,587
Printing press, web, P. F. Cox 884,901
Printing press web-feeding device, P. F. Cox 884,900



Model Makers

Gunsmiths, Electrical Workers and Mechanics generally are quick to recognize the superior merits of our

STAR Foot or Power LATHES

for all purposes. High-grade throughout and can be profitably used in all lines of machine shop and tool-room service. Ask for Catalog "B."

THE SENECA FALLS MFG. CO.
695 Water St., Seneca Falls, N. Y.

B-8

Engine and Foot Lathes

MACHINE SHOP OUTFITS, TOOLS AND SUPPLIES. BEST MATERIALS. BEST WORKMANSHIP. CATALOGUE FREE

SEBASTIAN LATHE CO., 120 Culvert St., Cincinnati, O.

NEW BOOK

FLYING MACHINES 50c.

PAST, PRESENT AND FUTURE

A popular account of Flying Machines, Dirigible Balloons and Aeroplanes. By A. W. MARSHALL and HENRY GREENLY. 128 pages, 24 illus. and 23 page plates. 12mo. Sent postpaid on receipt of 50c.

SPON & CHAMBERLAIN
123 S. A. Liberty Street, New York

Everything for the Automobile

SUPPLIES AND PARTS AT LOWEST PRICES

Our 1908 Catalog just out—200 pages, 1,000 illustrations, 5,000 descriptive prices. Sent Free

NEUSTADT AUTOMOBILE AND SUPPLY COMPANY
3932 Olive Street, St. Louis, Mo.

MAKE YOUR BICYCLE INTO A MOTORCYCLE

at small cost by attaching the ERIE. This includes all parts so that anyone can make a strong, durable machine that will climb steep hills. Send 4c. in stamps for bike Attachment catalog S, or Motor cycle catalog C.

Motorcycle Equipment Co., Hammondsport, N. Y.

RACINE WOOD SHAPER GUARD

Operator can see his work without obstruction, with absolute protection from accident.

MANUFACTURERS—
Protect Your Operator.
Avoid Damage Suits.
Let us send you Full Details.

PATENT PENDING

FAIR MFG. CO., BOX A, RACINE, WIS.

BARGAINS IN

AUTOMOBILES, NEW AND SECOND-HAND.
Largest dealers in the world.

All makes, guaranteed, at saving of 30 to 75 per cent. Send for latest complete list of new and second-hand Autos, on hand. Big saving on tires, apparel and supplies. Send for our new catalogue No. 129, just issued, it will save you money.

TIMES SQUARE AUTOMOBILE CO.
1599 B'way, N. Y. City. 1332 Michigan Ave., Chicago, Ill.

WORK SHOPS

of Wood and Metal Workers, without steam power, equipped with

BARNES' FOOT POWER MACHINERY

allow lower bids on jobs, and give greater profit on the work. Machines sent on trial if desired. *Catalog Free.*

W. F & JOHN BARNES CO.
Established 1872.
1999 RUBY ST. ROCKFORD, ILL.

Keystone Well Drills



for Artesian and Ordinary Water Wells; Mineral Prospecting and Placer Testing for Dredgers; Deep Drilling for Oil and Gas; Contractor's Blast Hole Drilling, River and Harbor Exploration, etc. Our five catalogs are textbooks on these subjects.

KEYSTONE WELL WORKS
Beaver Falls, Pa.
New York Office, - - - - 170 Broadway

The **MAXIMUS**
Self-Cleaning
TIMER

Increases power and speed of engine. Stopsspark plug troubles. Saves gasoline and batteries. Trial price any cylinder, including Buick Special, $8 prepaid. Money back in 30 days if wanted.

The Beckley-Ralston Co.
78 Michigan Av., Chicago



CURTISS WORLD'S RECORD MOTORCYCLES



New Single and Double Cylinder Models for 1908 now ready. Diamond Medal, Highest Award, National Endurance run, won on a Curtiss. Send for Catalogue H and Booklet "Achievements."

G. H. CURTISS MFG. CO., Hammondsport, N. Y.

FOX MOTORS
HIGH SPEED-HEAVY DUTY

Our 15 sizes of High Speed and Heavy Duty Motors are fully described in our catalog. The sanest, most direct and most convincing motor catalog ever issued. Write for it.

THE FOX REVERSIBLE GASOLINE ENGINE CO.
213 Front St., South Cincinnati, Newport, Ky.

WELL DRILLING Machines

Over 70 sizes and styles, for drilling either deep or shallow wells in any kind of soil or rock. Mounted on wheels or on sills. With engines or horse powers. Strong, simple and durable. Any mechanic can operate them easily. Send for catalog.

WILLIAMS BROS., Ithaca, N. Y.

The Rapid Commercial Cars

Motor Cars that Earn Money

We have developed the motor car exclusively as an aid to business and a money-earner, and are able to show you, no matter what business you are in, a car adapted to your special needs.

Rapid Passenger Cars

built to carry from 12 to 25 passengers comfortably, make a profitable investment for the man of limited capital, as they are in constant demand in connection with hotels, summer resorts, sight-seeing service, or as a means of quick transportation between villages and suburban communities.

A Car for every commercial purpose

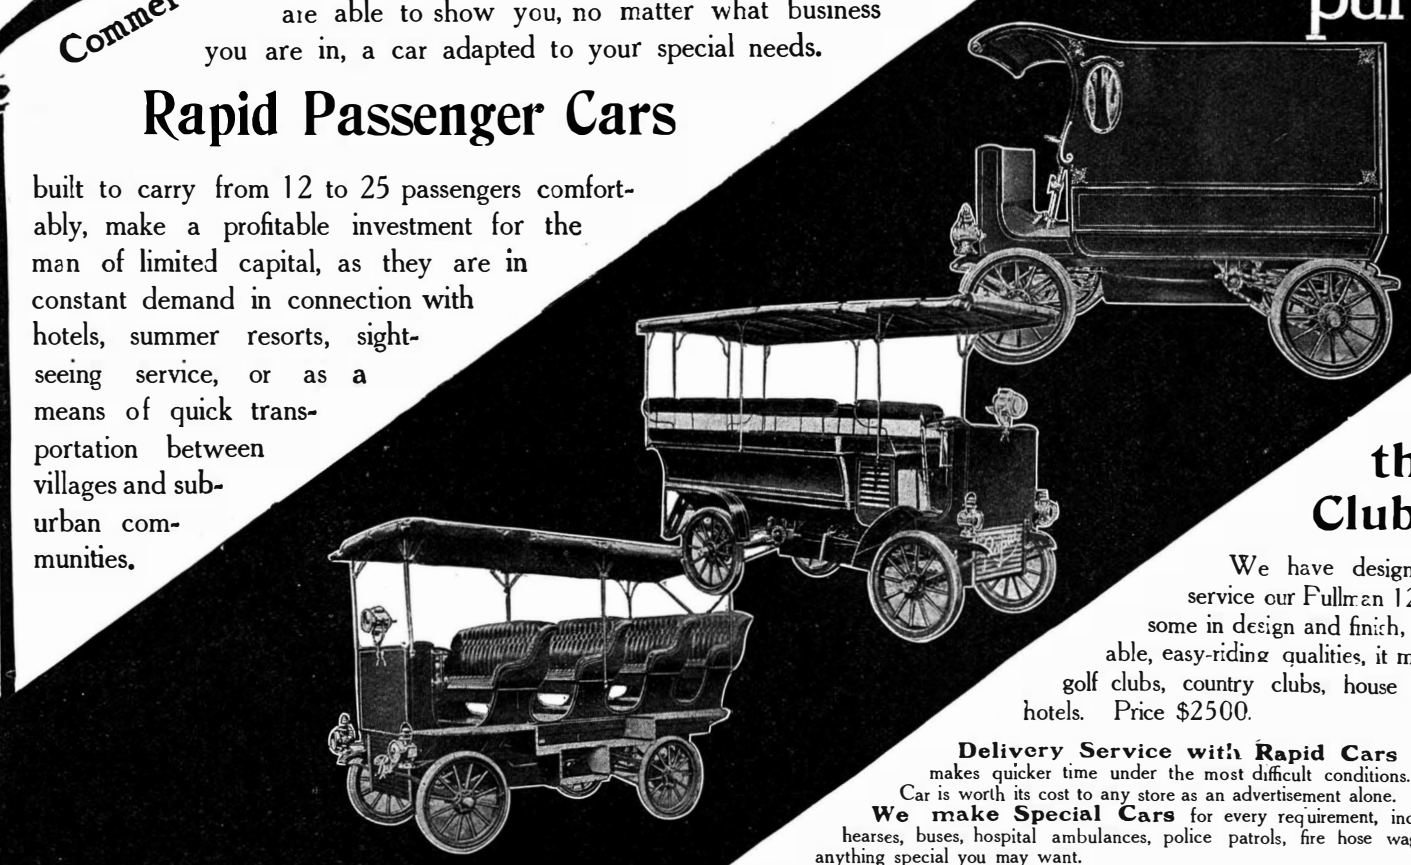

The Car for the Country Club or Home

We have designed especially for this service our Fullman 12-passenger car. Handsome in design and finish, luxurious in its comfortable, easy-riding qualities, it makes the ideal car for golf clubs, country clubs, house parties and high-class hotels. Price $2500.

Delivery Service with Rapid Cars not only saves money but makes quicker time under the most difficult conditions. A Rapid Delivery Car is worth its cost to any store as an advertisement alone.

We make Special Cars for every requirement, including drays, hearses, buses, hospital ambulances, police patrols, fire hose wagons, and anything special you may want.

Write me personally the kind of service you are interested in, and I will tell you just what our cars can do in your particular case.

B. P. HENRY, Sales Manager
RAPID MOTOR VEHICLE CO.
Largest makers exclusively of commercial motor cars in the world
135 Rapid Street, Pontiac, Mich.
We have some excellent unassigned territory for responsible agents of ability who own a garage.

The Rapid Commercial Cars

Printing rolls, means for inking, Sixt & Reichart 884,872
Propeller, reciprocating, W. Dawson 884,474
Pump, force, W. H. Shafer 884,769
Pump, rotary, F. J. Macnish 884,747
Puzzle, J. C. Critchett 884,902
Quilting frame, W. F. Cash 884,793
Radiator, C. R. Kline 884,739
Raft, lumber, N. McLaughlin 884,408
Rail brace, Fleshman & Koontz 884,917
Rail joint, J. D. Stitzell 884,774
Rail joint, O. G. Cosner 884,796
Rail joint, continuous, R. C. McClure 884,518
Rail joint truss, R. S. Handford 884,382
Rail tie and fastening means, R. S. Scott. 884,867
Railway, conduit electric, L. W. Musick .. 884,517
Railway crossing alarm, D. W. Thomas ... 884,537
Railway, electric, A. C. Eastwood 884,646
Railway rail, H. B. Unruh 884,690
Railway rail fastener, C. Walton 884,435
Railway, scenic, G. Lacomme 884,594
Railway signal, electric, G. A. Stafford, et al 884,622
Railway signal system, M. G. Voigtlander, 884,783, 884,784
Railway switch, T. J. Burke 884,792
Railway system, electric, A. C. Eastwood, 884,644, 884,645
Railway tie fastening, C. M. Mapes 884,941
Razor blade holder, P. J. Enright 884,805
Razor, safety, J. A. Everett 884,375
Refractory articles, making, C. F. Burgess. 884,463
Refrigerator drip pans, automatic alarm for, A. H. Leondar 884,828
Repair tool, McBean & Birchwood 884,751
Roaster, J. C. Prims 884,523
Roller or wheel, W. L. Curtis 884,720
Roof snow guard or fender, F. A. Peter 884,850
Rope grip, R. E. Patterson 884,521
Rotary cutter, G. A. Bauer 884,556
Rotary engine, P. O. Poulson 884,952
Rotary engine, T. H. Lukens 884,984
Rotary motor, Gillmor & Sweet 884,812
Rule, W. J. De Lashmutt 884,904
Rule, computing slide, H. Grondahl 884,729
Sack cleaning and turning apparatus, Willimann & Hecht 884,449
Sash balance, Daly & Leake 884,472
Sash lock, R. Heinle 844,581
Saw setting tool, C. A. Drew 884,909
Sawing machine, Libby & Connor 884,744
Scaffold apparatus, F. E. Gordnier 884,813
Screen doors, fly protector for, Walterbach & Heil 884,547
Seal fastening, T. E. Murray 884,604
Seating, E. G. Budd 884,710, 884,711
Seating, Kilburn & Budd 884,736
Self starter, W. O. Lum 884,511
Separator. See Slime separator.
Sewage ejector, W. McClintock 884,406
Sewing chair, E. Bailey 884,554
Sewing machine, J. C. Goodwin 884,579
Sewing machine, Wilkinson & Goodwin 884,629
Sewing machine attachment, G. B. Meeker. 884,833
Sewing machine bed plate or work support, C. T. E. Gould 884,482
Sewing machine needle, J. E. Ridgway 884,857
Shade and curtain pole holder, window, J. H. Green 884,656
Sharpening apparatus, lawn mower, H. E. W. Loomis 884,672
Sharpening machine, saw, J. P. Hedstrom .. 884,385
Shingling bracket, J. Lasley 884,507
Shipping box, W. E. Depp 884,572
Shipping case cover fastener, J. Brauer ... 884,890
Ships, construction of screw propelled, J. T. Duncan 884,912
Shoe, A. & D. A. Reed 884,681
Shoe fastener, J. W. Barna 884,454
Shoe fastener, J. P. Wakefield 884,628
Shoe shank tacking machine, L. A. Jones .. 884,392
Shoe shank tacking machine, B. B. Waterman 884,437, 884,438
Shoe tongues, forming, F. W. Crawford 884,471
Show case, W. K. Williams 884,549
Show case clamp, F. Tynis 884,877
Show case, dust proof knockdown, N. H. Cederquist 884,569
Shucking rack and fodder binder, combined, K. R. Van Winkle 884,879
Shutter fastener, H. F. Chreitzberg, 884,895, 884,896
Sickle bar and cutter, combined, L. R. Clifton 884,897
Sieve, sifter, J. S. Coventry 884,899
Sign, enamel, A. P. Claridge 884,570
Sign, metal, F. W. Perry 884,951
Signaling system, E. E. Kleinschmidt, 884,737, 884,738
Skid holder, R. E. Oslin 884,847
Slicing machine, meat, H. Broome 884,893
Slime separator, centrifugal, J. T. Lindahl .. 884,830
Slipper attachment, K. A. McIntire 884,520
Slotting machine, Griggs & Smith 884,486
Smoke consumer for boiler furnaces, J. D. Nix 884,945
Socket cap, W. S. Stapley 884,624
Sod trimmer, R. E. Poindexter 884,416
Spike and tie plate, W. Goldie, Jr. 884,578
Spinning and twisting machine, Singleton & Gleason 884,621
Spinning machine thread guide, Ambler & Wallace 884,700
Spirits, manufacture of, G. Fritsche 884,576
Spoke extractor, D. L. Williams 884,447
Spoon, medicine, W. L. Jerkins 884,390
Sprinkler heads, device for plugging, Thornton & Munroe 884,430
Square, C. H. Stark 884,773
Squirrel exterminator, A. P. Bellows 884,888
Stacker, C. E. Lang 884,505
Stacker, H. W. Blaisdell 884,560
Stair tread, J. Kahn 884,493
Stanchion, A. Torhorst 884,962
Stanchion, cattle, D. E. Miles 884,599
Steam boiler, L. J. Tracy 884,431
Steam boiler, tubular, C. Rohrs 884,956
Steam regenerator, A. C. E. Rateau 884,610
Steam trap, J. E. Swendeman 884,626
Steam trap, F. Duffy 884,724
Stone sawing machine, J. M. Owens 884,949
Stoneworking tool, C. B. Richards 884,419
Stoves, crude oil burner for, G. & L. Madden 884,939
Street sweeper, M. V. Ruff 884,421
Stuffing box, Salt & Herb 884,864
Sunbonnet, C. E. Yount, Sr. 884,553
Suspender hook and drawers support, C. B. Dickerson 884,906
Swingletree, A. J. Jefferson 884,389
Switch box, T. J. Cleland 884,466
Syrup percolator, simple, J. C. Hardesty 884,921
Talking machine feeding apparatus, L. P. Valiquet 884,963
Tapping device, pipe, J. H. B. Bryan 884,565
Target, J. Arbat 884,972
Target, rotary, F. J. Johnston 884,663
Target trap, J. Bowron 884,703
Telegraph transmitter, M. S. Haling 884,381
Telegraphy, wireless, G. Marconi, 884,986, 884,987, 884,989
Telephone attachment, W. W. Bythiner 884,637
Telephone desk stand, A. M. Knudsen 884,500
Temperature exchanging apparatus, E. Moreau 884,600
Tent, R. P. Orr 884,948
Thill coupling and support, combined anti-rattler, W. Cox 884,469
Thresher, cleaner, and storage unloader, bur cotton, W. R. Lamb 884,671
Threshing machines, bundle conveying attachment for, W. C. Niebuhr 884,753
Tie. See Rail tie.
Time lock, J. Flindall ..... 884,807 to 884,809
Tire and wheel therefor, W. Bowden 884,702
Tire construction, F. A. Bragg 884,562
Tire protecting casing, L. N. Cates 884,794
Toe nails, device for curing ingrowing, C. J. Foster 884,376
Tool guiding device, H. Y. Everett 884,374
Tool, pneumatic, C. B. Albree 884,971
Tops, spinning holder for, K. E. Johansson 884,391
Toy, J. H. Hettinger 884,387
Toy, H. E. Waggaman 884,692
Traction engine, S. S. Rose 884,685
Train signal, F. P. Page 884,950
Trap, R. F. Hadley 884,380
Trolley, Mitchell & Fretz 884,750
Trolley, E. Cameron 885,002
Trolley harp and wheel, E. D. Rockwell 884,684
Trolley, overhead, Lord & Wilkins 884,397
Trolley pole and head, A. F. Bauer 884,630
Trolley switch, E. Cameron 885,000
Trolley track support, overhead, E. Cameron 885,001
Trolley wheel, F. G. Walker 884,546
Truck, scale, and bag holder, combined, E. J. Bricker 884,459
Truck side frame, C. B. Goodspeed 884,726
Tumbler washer, E. J. Rabideau 884,992
Turbine, R. Cramp 884,719
Turbine motor, gasolene, Orebaugh & Connett 884,846
Turbine, wind, C. V. Gustafson 884,817
Turn table derailer, R. Ogle 884,947
Turning machine, J. Young 884,451
Turpentine hack, C. E. Rayford 884,854
Twine holder, E. P. Dandridge 884,799
Type casting mold, Nuernberger & Rettig, Jr. 884,754
Typewriter, electric, J. Lemble 884,742
Typewriter ribbon feed mechanism, J. Volker 884,691
Typewriting machine, C. E. Kelley 884,591
Typewriting machine, H. A. Carhart 884,638
Typewriting machine, C. W. Howell 884,735
Typewriting machine, S. H. Farnham 884,915
Typewriting machine, C. Gibbs 884,980
Umbrella, folding, J. Casale 884,712
Valve for fire sprinkler systems, J. B. McGinley 884,841
Valve for radiators, venting, L. W. Eggleston 884,372
Valve gear for gas engines, F. E. Norton ... 884,677
Valve, oscillating steam balanced, J. H. Burnham 884,362
Valve, radiator, J. B. Morgan 884,601
Valves, grinding attachment for check, M. P. Maxwell 884,942
Vehicle running gear, H. W. Hancock 884,488
Vehicle shock absorber, W. C. Williamson .. 884,967
Vehicle wheel, J. B. McDonald 884,840
Vehicles, radiator or cooler for motor road, F. J. D. Hullinghorst 884,929
Vending machine, S. Jenkins 884,589
Vending machine, stamp or ticket, Dickie & Brown 884,802
Veneers, gluing, A. A. Dennis 884,905
Vessel, double walled, R. Burger 884,567
Vessel with double walls and protective case, H. Henn 884,582
Vessels, appliance for adding to the record speed of, W. Laudahn 884,936
Vise, fluid actuated, T. F. Warwick 884,548
Wagon rack, farm, J. F. Pokorney 884,679
Wall register, W. J. Owens 884,678
Washing machine, S. F. O'Connor 884,946
Watch and clock movements, time strike for, Stricker & Meyer 884,686
Watch balance wheel, J. Poruba 884,852
Water heater, electrical, E. J. Condon 884,367
Water lock gate, G. Luscher 884,400
Water meter, O. Hiersing 884,491
Water meter, disk, H. Fredrick 884,650
Water wheel, impact, Doble & Gfeller 884,907
Water wheel, turbine, J. A. Smith 884,426
Weeder and cultivator, combined, Gordon & Wolfe 884,814
Well cleaning device, oil, Monroe & Seymour 884,675
Wheel. See Driving wheel.
Whiffletree attachment, E. C. Coffin 884,715
Whiffletree coupling, W. W. Hills 884,388
Window and screen therefor, M. A. Dietrick 884,803
Window, store, P. H. Morris 884,404
Window ventilator, L. S. Martin 884,598
Wire fabric, woven, I. J. Young 884,883
Wire reel, W. O. Backes 884,974
Wire shaping and forming machine, H. J. Bragdon 884,633
Wire working tool, Huhta & Laurell 884,821
Wrench, W. Schmitt 884,422
Wrench, G. W. Mason 884,748
Wrench, C. Miller 884,836
Wrench, D. C. Pierce 884,851
Wrench, C. E. Hawkins 885,003
Zinc sulfid pigment and producing the same, H. W. de Stuckle 884,874

DESIGNS.

Card, color, T. R. Manley 39,262
Cigar band, F. A. C. Kaiser 39,261
Emblem, Z. S. Eldredge 39,258
Fly plate, sticky, C. Schedell 39,263
Fobs, brooches, pins, or similar articles, head for, H. Kollmar 39,259
Money box, B. vom Eigen 39,260
Pillar seat, J. B. Holtzclaw 39,265
Vehicle body, J. C. Kaiser 39,266
Wall cage, H. L. Jones 39,264

TRADE MARKS.

Absorbent linen and gauze, Oxford Linen Mills 68,554
Ale and mineral water, ginger, Waukesha Arcadian Co. 68,510
Anchovies and fish preserves, Aktiebolaget Sveriges Forenade Konservfabriker 68,532
Axes, Warren Axe and Tool Co. 68,487
Beverage and syrup for same, B. F. Smith .. 68,508
Binders, loose leaf, J. F. Fitzpatrick 68,567
Books relating to stenography, Sir Isaac Pitman & Sons 68,562
Boots and shoes, leather, C. Breiding & Sohn 68,566
Brandy, Barton Vineyard Co. 68,564
Bronzes, ivory, etc., Chinese and Japanese, Sing Fat Co. 68,569
Brushes, paint and varnish, Rennous Kleinle & Co. of Baltimore City 68,505
Chemical solutions, compounds, and preparations, certain, Eastman Kodak Co. 68,515
Chemicals, certain, Pacific Coast Borax Co., 68,524, 68,525
Cigarettes, Ware-Kramer Tobacco Co. 68,485, 68,486
Cigarettes, Philip Morris & Co. ..... 68,501 to 68,504
Cigars, S. S. Speier 68,509
Cigars, W. S. Bare 68,563
Cigars, cheroots, and little cigars, A. J. Forman 68,474
Clothing, certain, S. Sternberger & Co 68,560, 68,561
Coffee, Arnold & Aborn 68,488
Combs and hair ornaments, Hannoversche Gummi-Kamm-Compagnie Actien-Gesellchaft 68,517
Concrete flooring, C. Clemente 68,493
Copper and brass sheets and wire, Michigan Copper & Brass Co. 68,481
Corsets and corselets, J. V. Margaine-Lacroix 68,552
Cotton duck, Mount Vernon-Woodberry Cotton Duck Co. 68,575
Cotton piece goods, bleached and unbleached, Pepperell Manufacturing Co. 68,576, 68,579
Disinfectant and deodorizer, J. F. C. Luhan. 68,522
Disinfectant, sheep-dip, and cattle wash, W. Cooper & Nephews 68,513
Disinfectants, Chemische Fabriks Werke Gesellschaft mit beschrankter Haftung ... 68,546
Dolls and stuffed toy figures, Margarete Steiff, G. m. b. H. 68,568
Dynamite, gelatin, Potts Powder Co. 68,556
Dynamite, nitroglycerin, Potts Powder Co. .. 68,557
Fabrics, certain textile and lace, United Paper Co. 68,580
Felt and paper roofing, H. W. Johns-Manville Co. 68,496
Fish, preserved, Aktiebolaget Sveriges Forenade Konservfabriker 68,531
Flavoring extracts, Marden & Bull 68,538
Flour, wheat, Sheffield-King Milling Co. 68,507
Foods, certain cereal, Montevideo Roller Mill Co. 68,498
Furnaces and burners, certain, W. Scrimgeour, Jr. 68,559
Furniture, mission, L. B. Ridenour 68,506
Gas generators, acetylene, R. P. Elliott 68,547

Classified Advertisements

Advertising in this column is 75 cents a line. No less than four nor more than ten lines accepted. Count seven words to the line. All orders must be accompanied by a remittance. Further information sent on request.

READ THIS COLUMN CAREFULLY.—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring the information. **In every case it is necessary to give the number of the inquiry.** MUNN & CO.

BUSINESS OPPORTUNITIES.

FOR SALE.—$30,000 for large sash, door and blind factory and planing mill in Bagdad and Pensacola, Florida. Has a cash value of $50,000 and can be purchased for $5,000 cash, balance on easy terms. For further particulars address The Fisher Real Estate Agency, Pensacola, Fla.

Inquiry No. 8591.—Wanted names of one or two concerns making plate ice machinery.

BIG MONEY any locality operating or selling our Combined Mintalets and Crystalets Vending Machines. New Idea. Lawful. Fine side line. Machine sent on trial. Crystal Vending Co., 8 Monypeny Bldg., Columbus, O.

Inquiry No. 8592.—Wanted an aluminum welding compound.

WANTED.—Patented Trace-holder manufactured on a royalty. Small capital required. Big sales and big margin. Address L. M. Campau, Callaway, Neb.

Inquiry No. 8593.—Wanted metal and glass awnings for export to Cuba.

START A MAIL ORDER BUSINESS of your own, but not with a cheap trick or novelty. I made $50,000 in five years and began small. I will show you how to start right. Send for free booklet. Heacock, Box 953, Lockport, N.Y.

Inquiry No. 8594.—Wanted spring suitable for spring motor.

PATTERN LETTERS AND FIGURES (White Metal and Brass) for use on patterns for castings. Large variety, prompt shipments. Send for catalog. H. W. Knight & Son, Seneca Falls, N. Y.

Inquiry No. 8595.—Wanted small plant for manufacturing lye, hominy, horseradish and Saratoga chips.

REVERSIBLE STEAM TURBINE PROMOTER wanted. Address Hornig, 139 Clinton Ave., Jersey City.

Inquiry No. 8596.—Wanted to buy printed pillow tops for sofa pillows.

PATENTS FOR SALE.

FOR SALE.—$500 buys improved twine cutter, Patented in United States and Canada, Nos. 847,812—104,507. For information and full particulars address Peterson & Moen, 3918 South 6th Street, Calumet, Mich.

Inquiry No. 8597.—Wanted to buy an alcohol furnace to heat a hot water system.

FOR SALE.—Mail Bag Catcher and Deliverer. Patent No. 866,411 together with improvements now being perfected. This should be a very profitable device to place on market, as there is a demand for same by steam railroads and suburban trolleys. Address C. H. Anthony, St. James, Mo.

Inquiry No. 8598.—Wanted to buy water turbines.

FOR SALE.—Patent No. 805,584 (Range Finder), dated November 28, 1905. This instrument, once correctly regulated, will indicate distance from stand to any object. Also trains eye to judge distances. Address inventor, Friederich Rump, Cheboygan, Mich.

Inquiry No. 8599.—Wanted to buy a 12-inch copper cylinder head.

FOR SALE.—Patent No. 873,631. A new and useful improvement in mouse traps. A choker. All metal. Pat. Dec. 10, 1907. A. T. Sullivan, Whitewater, Kansas.

Inquiry No. 8600.—Wanted to buy large quantities of wooden mangle roller blocks.

A VALUABLE INVENTION universally wanted. Patented in U. S. and England. One or both for sale. Sells at sight; large profits. Three stamps, for samples. A. J. Chase, Melrose, Mass.

Inquiry No. 8601.—Wanted an incandescent lamp burner for kerosene lamps.

FOR SALE.—Patent just issued on creaming and mixing machine for cake doughs. A fortune in it for anyone interested in bakers' machinery. A. Roth, Newport, Ky.

Inquiry No. 8602.—Wanted to buy machinery and materials for incandescent gas mantle manufacture.

FOR SALE.—Chemical Shot Firer. Will set off shot at any desired time from ten minutes up to six hours. Sure to fire. Cheap and safe. Done with chemicals and water. Will fire dynamite or powder. Absolutely safe and easy to fire. Patented Sept. 4, 1906, by John Dowd and A. M. Mason. Good reasons for selling. Address L. D. Mason, 401 W. Euclid Ave., Pittsburg, Kansas.

Inquiry No. 8603.—Wanted to buy paper which imitates wood.

FOR SALE.—Improved Adjustable Die Stock. U. S. Patent 870,828. Several sizes, threaded with same dies and reamer. Simple. For particulars address Jorgensen, 9 Flint Street, San Francisco, Cal.

Inquiry No. 8604.—Wanted names of manufacturers of horse clipping machines.

HELP WANTED.

WRITE US TO-DAY if open for position in sales, office or technical work. Information free. State age, experience and location desired. Address Hapgoods, 305 Broadway, New York.

Inquiry No. 8605.—Wanted manufacturer of gasoline tanks for gasoline flatirons. Size 3 x 2¼ inches. The tanks have spun brass sides and cast brass tops and bottoms.

WANTED.—The services of a man who thoroughly understands the manufacture of sulphuric acid; particularly one who is well versed in the latest and most up-to-date machinery and processes, as Superintendent to take charge of this department of the business of a manufacturing corporation. Address Superintendent, Box 773, New York.

Inquiry No. 8606.—Wanted to buy a cutting and winding machine for narrow fabric bias binding.

AGENTS WANTED.

AGENTS WANTED in every county to sell the Transparent Handle Pocket Knife. Good commission paid. From $75 to $300 per month can be made. Write for terms. Novelty Cutlery Co., No. 2 Bar St., Canton, O.

Inquiry No. 8607.—Wanted to buy an electric incubator.

AERONAUTICS.

INSTRUCTION.—Three courses; Balloons, Dirigibles, Aviation, prepared by Lieut. C. Espitallier, French Army. Catalogue. International School of Aeronautics, 2 East 29th Street, New York.

Inquiry No. 8608.—Wanted to buy Broom machinery, Broom corn, Broom handles.

MALLET, Paris, Spherical Balloons and Dirigibles, Chauviere, Paris, Aeroplanes, Helicopteres. Antoinette Aviation Motors. Hue Aeronautical Scientific Instruments. Agent, A. C. Triaca, 2 East 29th St., N. Y.

Inquiry No. 8609.—Wanted to buy an automatic coin controlled machine for vending root beer, etc.

OLD COINS AND STAMPS.

$5.75 PAID FOR Rare Date 1853 Quarters. Keep all money coined before 1875 and send 10c. at once for a set of two coin and stamp value books, size 4 x 7. It may mean your fortune. C. W. Clarke & Co., Le Roy, N. Y.

Inquiry No. 8610.—Wanted addresses of manufacturers of collapsible tube machinery.

BOOKS AND MAGAZINES.

BUILD MISSION FURNITURE. Send 20 cents for three designs of easily made pieces of furniture for hall, den or library. Full directions for making and putting together. Furniture can be made by anyone who can handle a saw. List of books on home handicrafts free. Ask for free sample copy of Electrician and Mechanic, finely illustrated magazine written in popular style, devoted to all kinds of mechanical work. Sampson Publishing Company, 151 Beacon Building, Boston, Mass.

Inquiry No. 8611.—Wanted to buy springs for light power purposes.

PHOTOGRAPHY.

AMERICAN PHOTOGRAPHY succeeds American Amateur Photographer, Camera and Dark Room and Photo Beacon. The editors of each now join in making a magazine which should be in the hands of every photographer, professional or amateur. 15 cents monthly, $1.50 per year. Three specimen copies for a quarter. Am. Photographic Pub. Co., 361 Broadway, New York.

Inquiry No. 8612.—Wanted to secure locomotives propelled by vapor engines.

GRE-SOLVENT.

GRE-SOLVENT instantly dissolves Machine-grease, Paint, Ink, etc., from hands. Beneficial to skin. Sells like wildfire to every mechanic. Agents wanted. Big profits. Free sample. Do it now. Utility Co., 646 W. 44th St., N. Y. City.

Inquiry No. 8613.—Wanted to buy smoke consumers for house heaters.

HOUSEHOLD NEEDS.

BUTCHER'S BOSTON POLISH is the best finish made for floors and interior woodwork. Not brittle; will not scratch or deface like shellac or varnish. Send for free booklet. For sale by dealers in Paints, Hardware and House Furnishings. The Butcher Polish Co., 356 Atlantic Avenue, Boston, Mass.

Inquiry No. 8614.—Wanted to buy pearl button machinery.

MOTION PICTURES.

THE MOVING PICTURE WORLD, weekly, 10 cents per copy; yearly subscription, $2. The only paper devoted to the moving picture, illustrated song and lantern lecture field. Moving Picture World, Box 450, N. Y.

Inquiry No. 8615.—Wanted to buy a machine for breaking the hull of the almond nut without breaking the fruit.

Inquiry No. 8616.—Wanted to buy for export to Porto Rico perforated metal shelving.

Inquiry No. 8617.—Wanted to buy for export to Porto Rico complete baking plant for 1,000 loaves daily.

Inquiry No. 8618.—Wanted to buy for export to Porto Rico elevator or lift worked by hand or motor, capacity one ton.

Inquiry No. 8619.—Wanted to buy for export to Porto Rico refrigerating machine, cooling rooms, 10x12, 7x10, bar cooling box. Wanted complete with motor.

Inquiry No. 8620.—Wanted to buy aluminium cans.

Inquiry No. 8621.—Wanted to purchase coal briquetting machinery.

Inquiry No. 8622.—Wanted to buy automobile engines and supplies.

Inquiry No. 8623.—Wanted to buy electric cooking stoves with battery attached.

Inquiry No. 8624.—Wanted to buy portable rivet heaters.

Inquiry No. 8625.—Wanted to buy small sized channel iron, also leaf springs for experimental work.

Inquiry No. 8626.—Wanted to buy lacquered and plain sheet steel for sign making, also paraffining outfit for signs, presses for wood signs and sheet rubber.

Inquiry No. 8627.—Wanted to buy an alternating current generator of 2 K. W. capacity, or smaller.

Inquiry No. 8628.—Wanted to buy paving block machines for use with partly fluid substances.

Inquiry No. 8629.—Wanted to buy rubber specialties and coiled brass springs.

Inquiry No. 8630.—Wanted addresses of leading novelty manufacturers.

Inquiry No. 8631.—Wanted to buy fruit evaporators.

Inquiry No. 8632.—Wanted to buy machine for perforating music rolls.

Inquiry No. 8633.—Wanted to buy show cases.

Inquiry No. 8634.—Wanted to buy brass, bronze and china novelties.

Inquiry No. 8635.—Wanted to buy mica chimneys and smoke tops.

Inquiry No. 8636.—Wanted to buy household brushes.

Inquiry No. 8637.—Wanted to buy lawn mower grinders.

Inquiry No. 8638.—Wanted to purchase mica or porcelain insulation.

Inquiry No. 8639.—Wants stencils for decorative borders such as are used around half tones.

Inquiry No. 8640.—Wanted to buy alcohol lamps for lighting purposes.

Inquiry No. 8641.—Wanted to buy a self-lighting gas burner.

Inquiry No. 8642.—Wanted to buy a gasoline motor inspection car standard gage.

SPARK COILS

Their Construction Simply Explained

Scientific American Supplement 160 describes the making of a 1½-inch spark coil and condenser.

Scientific American Supplement 1514 tells you how to make a coil for gas-engine ignition.

Scientific American Supplement 1522 explains fully the construction of a jump-spark coil and condenser for gas-engine ignition.

Scientific American Supplement 1124 describes the construction of a 6-inch spark coil.

Scientific American Supplement 1087 gives a full account of the making of an alternating current coil giving a 5-inch spark.

Scientific American Supplement 1527 describes a 4-inch spark coil and condenser.

Scientific American Supplement 1402 gives data for the construction of coils of a definite length of spark.

The above-mentioned set of seven papers will be supplied for 70 cents.

Any single copy will be mailed for 10 cts.

MUNN & COMPANY, Publishers
361 Broadway New York

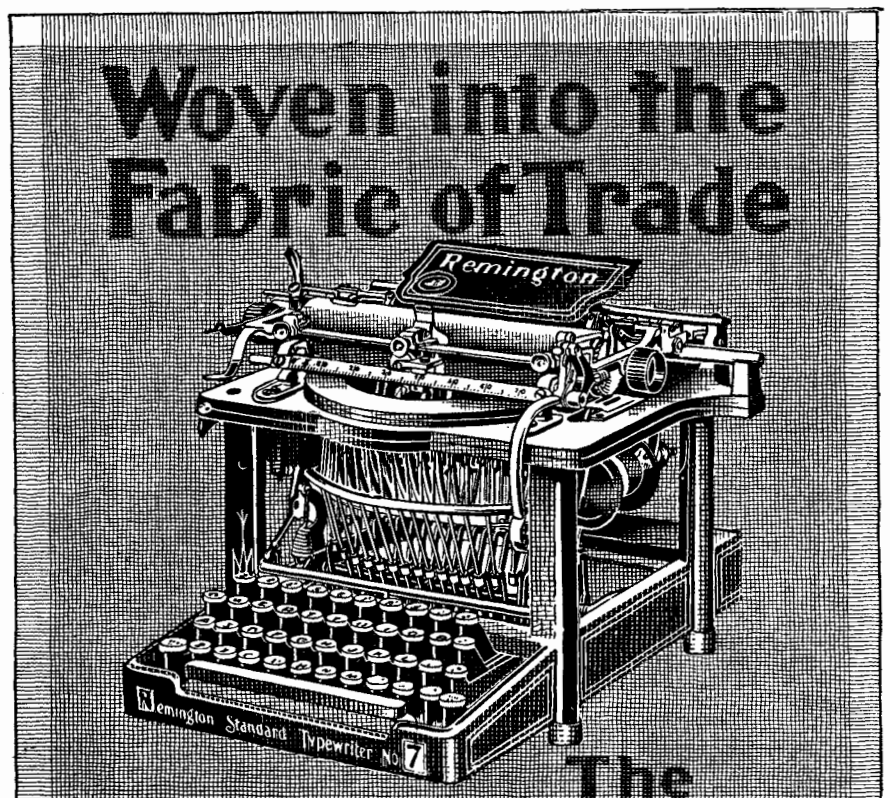

Woven into the Fabric of Trade

The Remington Typewriter

Indispensable to it Inseparable from it

Remington Typewriter Company
(INCORPORATED)
New York and Everywhere

YOU CAN EARN AS A TRAVELING SALESMAN

$2,000 TO $10,000 A YEAR

We will teach you to be one in eight weeks by mail and secure you a position with a reliable firm. No former experience required. Hundreds of good positions now open. Ours are the only practical Schools of Salesmanship in the United States. Endorsed by the leading manufacturers and wholesalers everywhere. Write for free Catalog "A Knight of the Grip" and testimonials from our graduates who have been placed in good positions. Address Dept. 729

National Salesmans-Training Association

OFFICES: Monadnock Block, Chicago, Ill., Scarritt Bldg., Kansas City, Mo., or Lumber Exchange, Minneapolis, Minn. Write nearest office and mention paper.

WE SHIP ON APPROVAL without a cent deposit, prepay the freight and allow 10 DAYS FREE TRIAL.

IT ONLY COSTS one cent to learn our unheard of prices and marvelous offers on highest grade 1908 model bicycles.

FACTORY PRICES Do not buy a bicycle or a pair of tires from anyone at any price until you write for our large Art Catalog and learn our wonderful propositions on first sample bicycle going to your town.

RIDER AGENTS everywhere are making big money exhibiting and selling our bicycles.

We Sell cheaper than any other factory.

Tires, Coaster-Brakes, single wheels, parts, repairs and sundries at half usual prices.

Do Not Wait; write today for our special offer.

MEAD CYCLE CO., Dept. S-259, CHICAGO

ALLEN Solder-Flux

Stick Paste. Salts or Liquid

Insure Perfection of Joints. Allen-Flux is Free from Acid. Sample free for dealer's name.

L. B. ALLEN CO., Inc. 1335 A Columbia Avenue

CHICAGO



The "Best"

The World's Best Light

Sold in every civilized country on earth. Costs less than kerosene, gives six times more light than electricity.

A Pure White Steady Light

Makes and burns its own gas. No wick, no odor, no smoke. Absolutely safe. For indoor and outdoor use,

Agents Wanted,

Exclusive territory, liberal commissions. Catalog free.

THE BEST LIGHT CO.

Owners of Original Patents.

87 E. 5th St. CANTON, OHIO.

Do You Appreciate

Absolute Reliability and Easy Starting?



Our 1908 Models will contain more real *motor value* than has ever before been incorporated in one small motor.

They are made especially for the man who wants the best.

CUSHMAN MOTOR COMPANY
2026 N. St., Lincoln, Neb., U. S. A.



Would You "Make the Round Trip" Without Uncertainty?

Investigate the

Hildreth Marine Motors

We are ready to

"SHOW YOU"

Send for valuable facts about Marine Motors.

THE HILDRETH MFG. CO.
703 Sheridan, Lansing, Mich., U.S.A

Ranch Life in the Rockies

New Book JUST OUT. Taking like wildfire. Everybody wants it. Hit of the day. Contains 100 views of ranch and farm scenes, government land and mining laws, correct Colorado map, etc. Describes cowboy life. Tells how to succeed.

Special Offer! The above great book is free to all sending us 50c. for a full year's subscription to our big western monthly farm and family magazine. Clubs of 3 and 3 books $1.00, 5 for $1.50. Stamps taken. Address

Rocky Mountain Farm Magazine, Station 3, Denver, Colo.

The Actual Worth

Of an adding and listing machine is in what it does, how it does it, and how long it will do it. The Universal Adding and Listing Machine will produce the maximum of nice, clean, clear-cut, accurate work with the least effort, and it will last longer under any kind of use than any other adding and listing machine ever built.

The Universal always adds what it prints and prints what it adds—it prints in just as perfect alignment after years of hard use as the day it left the factory.

The key action is light; the handle pull is smooth and easy; the adding register is in plain view, just above the keyboard; items to be added are printed in black, blue or purple, and the totals and sub-totals are always printed in red, right next to the last item. No blank stroke of the handle is necessary before taking a total.

There are so many other important features on the Universal that are advantageous for you on your work that you ought to write and tell us about your class of work and learn what the Universal will do for you, and how it will do it easier and faster than you are doing it at present.

There is no charge or obligation attached to your getting all this information. Can you afford not to write us now?

Universal

Adding Machine Company

3835 Laclede Avenue

ST. LOUIS



'Ever-Ready' Safety Razor $1.00



GUARANTEED best of all safety razors Complete for **$1.00** with silver nickeled frame —**12 Ever-Ready** blades, handle and blade stropper attractively cased. Extra **Ever-Ready** blades **10** for **50 cents.** Ten new **Ever-Ready** blades exchanged for ten dull ones and 35 cents. **On Sale Everywhere.** Mail orders prepaid $1.00.

American Safety Razor Co.
320 Broadway, New York

12 BLADES With Every Set

"Porox" Ignitor Storage BATTERIES

High Capacity. Light Weight.

Proved as the best for both ignition and light. No loss of current. It stores and returns the power to your machine. You can see and examine the interior without exposure and digging, because it is made up in transparent celluloid jars. No danger of breakage like hard rubber. Plates and jars are guaranteed for one year.

Send for catalog.

Albert Muller, 145 West 49th St., New York

RUBBER STAMP MAKING.—THIS article describes a simple method of making rubber stamps with inexpensive apparatus. A thoroughly practical article written by an amateur who has had experience in rubber stamp making. One illustration. Contained in SUPPLEMENT **1110.** Price 10 cents. For sale by Munn & Co. and all newsdealers.

KING Folding CANVAS BOATS

Lighter, more durable than wood. Serviceable in salt water. Puncture-proof; non sinkable; can't tip over. A revelation in boat construction. Can be carried by hand, or checked as baggage. When not in use, fold up into a package. Send 6c. for Catalog, 100 Engravings. **KING FOLDING BOAT CO., 683 Lake Street, Muskegon, Mich., formerly Kalamazoo.**



THE STRELINGER

(Four cycle, one to four cylinder) Absolutely the

Best Marine Engine Ever Made

We also carry in stock several of the best makes of Two-cycle Marine Engines and a full line of Boat Accessories. Let us know your wants and we will quote prices.

Engines 1½ to 50 h. p. $33 to $2,500

Write for our 1908 catalog

The Strelinger Marine Engine Co.
Dept. 8, Detroit, Mich., U.S.A.

The Strelinger

HASCHKE ELECTRIC STORAGE BATTERIES

STATIONARY and PORTABLE. Any size for any duty. Oldest and truest system in the world. *High Capacity. Long Life.* Send for catalogue.

HASCHKE STORAGE BATTERY CO., 273 Michigan Ave., CHICAGO

Chemical Analyses

Industrial products examined and working formulas provided, processes improved, counsel and expert evidence. Assay of ores, alloys, water and fuels, etc., etc. Inventors assisted; instruction. Established 1882. **Monadnock Laboratory, Chicago.**

60 YEARS' EXPERIENCE

PATENTS

TRADE MARKS DESIGNS COPYRIGHTS &C.

Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. **HANDBOOK** on Patents sent free. Oldest agency for securing patents.

Patents taken through Munn & Co. **receive** *special notice*, without charge, in the

Scientific American.

A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, $3 a year; four months, $1. Sold by all newsdealers.

MUNN & Co. 361 Broadway, **New York**
Branch Office, 625 F St., Washington, D. C.

Gypsum, calcined, Empire Gypsum Co.	68,494
Hair tonic, K. Culver	68,514
Hair tonics, Sage Brush Tonic Co.	68,527
Ink, printing, Ault & Wiborg Co.	68,489
Lamps, incandescent electric, Boston Incandescent Lamp Co.	68,565
Laxative compounds, Mother Seigel's Syrup Co.	68,539
Lubricants, J. N. Blackman	68,471
Magazine, Florence Publishing Co.	68,548
Medicinal tonic, F. G. Stewart & Co.	68,516
Medicines, certain, Ecso Pharmacal Co.	68,537
Milk, condensed, Wayne County Condensed Milk Co. 68,529,	68,530
Optical instruments and parts thereof, C. Zeiss 68,570,	68,573
Paint and varnish cleaner and solvent, Hazard Paint and Chemical Co.	68,476
Painters' materials, certain, Thomson Wood Finishing Co.	68,484
Paper and envelops, writing, Carew Manufacturing Co.	68,545
Pianos, Palmer Piano Co.	68,526
Pianos and piano actions, Lauter Co.	68,519
Plaster and lime, certain, Ohio Builders' Supply Co.	68,499
Plumbers' supplies, certain, L. Wolff Mfg. Co.	68,497
Powder, insect, J. L. Hopkins & Co.	68,518
Powder, toilet, Gerhard Mennen Chemical Co.	68.574
Powder, tooth, T. C. Delavan	68,536
Remedies for certain diseases, Van Riper & Co.	68,542
Remedies for female use, Bradfield Regulator Co.	68,534
Remedy for diseases peculiar to women, S. B. Leonardi	68,520
Remedy for fever and ague and malarial affections, J. B. Davenport	68,535
Remedy for poultry diseases, M. C. Siebold.	68,541
Remedy, tonic, Rocky Mountain Sage Tonic Co.	68,540
Rubber boots and shoes, Goodyear's Metallic Rubber Shoe Co.	68,549
Rubber nipples, Pax Manufacturing Co.	68,555
Sardines, J. Braadland 68,511, 68,512,	68,533
Soles for footwear, Actual Knitting Mills.	68.543
Starch, laundry, National Starch Co.	68,523
Starch, laundry, Union Starch Co.	68,528
Stationery articles, certain, J. J. Rehbach.	68,558
Steel, Cammell Laird & Co.	68,472
Steel, Jonas & Colver	68,479
Steel and partly wrought castings, S. Osborn & Co.	68,482
Tea, C. S. Morey Mercantile Co.	68,490
Teas, H. W. De Forest	68,495
Thread and flax yarn, linen, Linen Thread Co.	68,521
Tin roofing, J. S. Hoy 68,477,	68,478
Tires, rubber, Hannoversche Gummi-Kamm-Compagnie Actien-Gesellschaft .. 68,550,	68,551
Tools, certain, George F. Eberhard Co.	68,475
Tools, certain, J. Lopez y Arechavala.	68,480
Tools, certain machine, Cammell Laird & Co., 68,491.	68,492
Turpentine substitutes, Charles H. Moore Oil Co.	68,473
Vibrators, mechanical, F. R. Muenzenberger.	68,553
Water, mineral, W. J. Perdue.	68,500
Wringers, clothes, American Wringer Co.	68,544

LABELS.

"Adler-Brau," for beer, Geo. Walter Brewing Co.	14,141
"Aunt Sall's Soda," for soda, S. J. Braun.	14,149
"Egas," for a hair grower, M. L. Hirschberg	14,148
"Gold's Zigel Bread Made of Pure Rye Flour," for bread, S. Gold.	14,146
"Independent Liquor Co.," for liquors, Independent Liquor Co.	14,143
"Jacob Ruppert Extra Beer," for lager beer, J. Ruppert	14,137
"Jacob Ruppert Knickerbocker Beer," for lager beer, J. Ruppert	14,139
"Jacob Ruppert Ruppiner Beer," for lager beer, J. Ruppert	14,138
"K. and S.," for beer, Kamm & Schellinger Brewing Co.	14,142
"Lebensgold," for a non-alcoholic beverage, C. H. Sommer & Co.	14,144
"Mellow Brau," for beer, Appleton Brewing & Malting Co.	14,140
"Morris's Anti-Rust," for a dressing or polish for gas and coal ranges and other metal articles, W. C. Morris.	14,150
"Old Time Rio Coffee," for coffee, Clifton Forge Grocery Company, Incorporated.	14,145
"Primeros," Schmidt & Co.	14,136
"Sweetheart," for canned syrup, Louisiana Molasses Co., Ltd.	14,147

PRINTS.

"Columbia Records," for sound records, Columbia Phonograph Co. Genl.	2,259
"Men's and Boys' Apparel," for men's and boys' apparel, H. C. Lyfton	2,261
"The Reliance Tailoring Co.," for men's clothing, Reliance Tailoring Co.	2,260

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address Munn & Co., 361 Broadway, New York.

HOW Manufacturers Can Increase Their Business

Read carefully, every week, the

Classified Advertising Column

in the

SCIENTIFIC AMERICAN

Some week you will be likely to find an inquiry for something that you manufacture or deal in. A prompt reply may bring an order.

Watch it Carefully

One Moment, Mr. Engineer

We have made a long forward stride in the manufacture of packings for air, steam and water joints. They are much more dependable, more durable than others.

Red Breast Packing

A Standard Red Sheet Packing

Saÿen-Reed Asbestos Packing

For High Pressure and Super-heated Steam

Mercer Packing

(Graphite and Rubber, Semi-Vulcanized)

Write us for circulars and samples.

MERCER RUBBER COMPANY, Hamilton Square, N. J.

(A wonderfully strong and well written description of our factory appeared in this magazine issue of October 5th)

The No. 2A BROWNIE

Built on the Kodak plan—uses Kodak film cartridges and may be loaded and unloaded in broad daylight. No dark room for any part of the work. A perfectly practical little camera for snap-shots or time exposures.

THE 1908 KODAK CATALOGUE fully describes and illustrates our six styles of *Brownies*, and fifteen styles of *Kodaks*, ranging in price from $1.00 to over $100.00, and fully explains the daylight development methods which have done away with the dark room. Free at Kodak dealers or by mail.

EASTMAN KODAK COMPANY,
Rochester, N. Y., *The Kodak City.*

Pictures, 2½ x 4¼. Price, $3.00.

Engineering News

(ILLUSTRATED)

214 Broadway, New York

The leading weekly Engineering paper of the world, devoted to the interests of Civil, Mechanical, Mining, and Electrical Engineers. 100 to 125 pages weekly. Send for free sample copy.



TWICE-TWO MOTOR NEW ERA IN CONSTRUCTION

Higher efficiency; greater reliability; more compactness; simpler. No gear wheels or cam shafts, no smoke, no odor, no compression in crank case. Single cylinder, 5-inch bore, 6-inch stroke, 600 R. P. M. Gives 12 Brake Horse Power. Rating guaranteed actual horse power delivered on the brake at speeds indicated. Write for illustrated catalog.

Two-cycle simplicity with more than four-cycle efficiency.

THE TWICE-TWO CYCLE ENGINE CO., Inc., 22 South Canal Street, Chicago, Ill.



AUTOMOBILES $100 AND UP

We will mail our large Illustrated Bargain Sheet of new and slightly used Automobiles on request. This sheet shows accurate photographic views of more than 50 Automobiles offered as low as $100. Every car guaranteed as represented. Write plainly to

S. CRAHAM AUTOMOBILE CO.

Established 17 years. [601-603-605 Madison St., CHICAGO, ILL.



"ENGINEERS' DESCRIPTIVE CHARTS" In Colors Works of Art

By JOSEPH G. BRANCH, B. S., M. E.

Showing "The Development of The Steam Boiler."
"The Development of The Steam Engine."
"The Development of The Electric Generator."

Especially Designed for Colleges and Students. . . . . Price, 50c. each
Complete set, handsomely bound, $1.00.

"Conversations on Electricity," by Joseph G. Branch, ... $2.00
"Heat and Light from Municipal and Other Waste," By Joseph G. Branch, . . $3.00

AGENTS WANTED. Sent prepaid on receipt of price.

RAND, McNALLY & CO., Publishers. - New York & Chicago



Mullins Steel Boats Can't Sink

—the fastest and safest boats built. Made of pressed steel plates, with air chambers in each end like a life boat, they are absolutely safe. Faster, lighter and more buoyant than wooden boats—practically indestructible—they don't leak, crack, dry out or wear out, and every boat is absolutely guaranteed. The ideal boats for pleasure, summer resorts, boat liveries, etc.

Send for catalog of Motor Boats—Marine Engines —Row Boats—Hunting and Fishing Boats.

THE W. H. MULLINS COMPANY 118 Franklin St., Salem, Ohio.

CHEAPER THAN A STEAM PLANT

OUR 200, 250 AND 300 H. P. PRODUCER GAS ENGINES & SUCTION GAS PRODUCERS For Mills and Electric Plants, as well as for General Power Purposes, are supplanting steam in all parts of the world. Fuel economy, labor economy. Awarded Gold Medal at the St. Louis Fair. One pound of fuel to the horse-power hour is the record. Write for catalogue 21.

WEBER GAS ENGINE CO., Box 423, Kansas City, U. S. A.

LET US BE YOUR FACTORY
STAMPINGS, MODELS, EXPERT WORK
THE GLOBE MACHINE AND STAMPING CO.
970 Hamilton St., Cleveland, O.

ICE MACHINES Corliss Engines, Brewers' and Bottlers' Machinery. THE VILTER MFG. CO., 899 Clinton St., Milwaukee, Wis.

MODELS & EXPERIMENTAL WORK. Inventions developed. Special Machinery. E. V. BAILLARD. 24 Frankfort Street. New York.

RUBBER Expert Manufacturers Fine Jobbing Work
PARKER, STEARNS & CO., 228-229 South Street, New York

Experimental & Model Work
Cir. & advice free. Wm. Gardam & Son, 45-51 Rose St., NY.

ELECTRIC GOODS.—Big Cat. 3 cts. Want Agents. Ohio Electric Works, Cleveland, O.

MODELS & GEARS INVENTIONS PERFECTED UNION MODEL WORKS 193 So. CLARK ST. CHICAGO.

MODELS & EXPERIMENTAL WORK, Gears, Dies, Tools, Novelties manufact'd. **M. P. SCHELL,** 1759 Union Street, San Francisco

SEALED PROPOSALS.

TREASURY DEPARTMENT, OFFICE OF COMMISSIONER of Internal Revenue April 8, 1908. Sealed proposals will be received at this office until 1 o'clock P. M., Saturday, June 20, 1908, for furnishing this office with glass hydrometers, walnut cases, proof cups and thermometers similar to those now in use in gauging distilled spirits, with the exception that a short mark is to be placed midway between graduations in the scales on the hydrometer stems. Samples of the articles now in use may be seen at this office or at offices of Collectors of Internal Revenue. Bids will be received from manufacturers only. Sample instruments must be submitted on or before May 23. Further particulars may be had by addressing the Commissioner of Internal Revenue, Washington, D. C.

JOHN G. CAPERS, Commissioner.

Telegraphy Circular free. Wonderful automatic teacher. 5 styles $2 up. **OMNIGRAPH CO.,** Dept. 52, **39 Cortlandt St., New York.**

BABBITT METALS.—SIX IMPORTANT formulas. SCIENTIFIC AMERICAN SUPPLEMENT **1123.** Price 10 cents. For sale by Munn & Co. and all newsdealers. Send for catalogue.

DRYING MACHINES For all kinds of granular materials. S. E. Worrell, Hannibal, Mo.

Do Your Own Printing

$5 press prints cards, labels, etc. Circular, book, newspaper press $18. Money saver, maker. All easy. Rules sent. Write factory for press catalog, type, paper, etc.

THE PRESS CO., Meriden, Conn.

Garden Hose

Rubber Belting

Steam Packing

Rubber Specialties

N. Y. BELTING & PACKING CO.
LIMITED
91 and 93 Chambers Street
NEW YORK
WRITE FOR CATALOGUE

Scales All varieties at lowest prices. Best Railroad Track and Wagon or Stock Scales made. Also 1600 useful articles, including Safes, Sewing Machines, Bicycles, Tools, etc. Save Money. Lists Free. CHICAGO SCALE CO., Chicago, Ill.

DECARBONIZER
chemically removes carbon from cylinders, piston rings and valves.
INCREASES POWER 20 PER CENT
Volatilizes carbon, in which form it passes out thru exhaust. **Injury to metal impossible.** Agents wanted in certain localities. **Sample, quart can, $1.50.** Write to-day for particulars.
General Accumulator & Battery Co
128 Second Street, Milwaukee, Wis.

THE BRISTOL CO.
Manufacturers of
Bristol's Recording Instruments
for Pressure, Temperature and Electricity,
ALSO
The Wm. H. Bristol Electric Pyrometers and Patented Smoked Chart Recorders
The most complete line of Recorders in the world for all uses.
Send for Catalogue
THE BRISTOL CO. Waterbury, Conn.
Branch Offices: { 114 Liberty St., New York / 45 Vesey St., New York

---

THE MAXIMUM OF POWER



in a minimum of space is afforded by the **Lloyd Marine Gasoline Engines** for launches of all kinds and sizes. Great fuel savers. Simple in construction, perfect in detail. Pistons of best grey iron. Cylinder, piston, connecting rod and crank shaft easily removed, adjusted or replaced. Minimum of vibration. Illustrated catalog free.
1,000 ISLAND BOAT & ENGINE CO.
Dept. L, Morristown, N. Y.
"We Build the Best Boats on the St. Lawrence River."

GOERZ

PHOTO LENSES
SHUTTERS
ANSCHÜTZ. CAMERAS
RIFLE TELESCOPES
TRIEDER BINOCULARS
Send 9 cents for beautiful de luxe general catalogue.

C. P. GOERZ AM. OPTICAL CO.
52 E. Union Square N. Y. City
1514 Heyworth Bldg. Chicago Ill.
703 Call Bldg., San Francisco, Cal.

Tools! Tools! Tools!

We keep all kinds. Send your name on a postal and get our 88-page Booklet

Montgomery & Co., 109 Fulton St., New York City



LUFKIN
TAPES AND RULES
ARE THE BEST.
For sale everywhere. Send for Catalog No. 16.
LUFKIN RULE CO.
Saginaw, Mich., U. S. A.
New York and London.

A MONEY MAKER
Hollow Concrete Building Blocks
Best. Fastest. Simplest, Cheapest Machine. Fully guaranteed.
THE PETTYJOHN CO.
615 N. 6th Street, Terre Haute, Ind.

HELMET OIL **LUBRICATES ANYTHING** SEND FOR SAMPLE FREE
15-21 S. CLINTON ST.
C.H. BESLY & CO. CHICAGO, ILLINOIS, U.S.A.

THE STRONGEST LIGHT METAL

McADAMITE
Specific Gravity 3.20
Tension, - 44,000 lbs. to sq. in. Compression, 126,000 lbs. to sq. in.
Transverse, 87,000 " " " " Torsion, - 60,000 " " " "
Send for test bar or a pattern for sample casting
U. S. McADAMITE METAL CO.
19 Rapelye Street BROOKLYN, N. Y.

A Detail of Convenience

Accessibility to every working part from above, is a notable feature in the construction of the

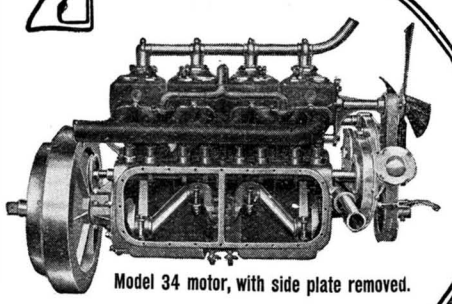

Model 34 motor, with side plate removed.

Rambler

For example, the motor, shaft and bearings are usually reached by removing the lower half of the crank case. This necessitates the removal of the boot or mud apron under the motor, a tedious and unpleasant job.

The Rambler crank case is not built that way. The entire side is removable, leaving an opening 8x23 inches that affords ample access to the entire crank shaft and cam mechanism without removal of or interference with any other part of the mechanism.

Transmission gears, differential and all other parts are equally accessible.

This is one of the little things that in the aggregate make the Rambler the leader of American cars. Our catalog tells the rest. Write for it or see our nearest representative for demonstration.

Thomas B. Jeffery & Company

Main Office and Factory, Kenosha, Wis.
Branches and Distributing Agencies:
Chicago, Milwaukee, Boston, Philadelphia, San Francisco.
Representatives in all leading cities.

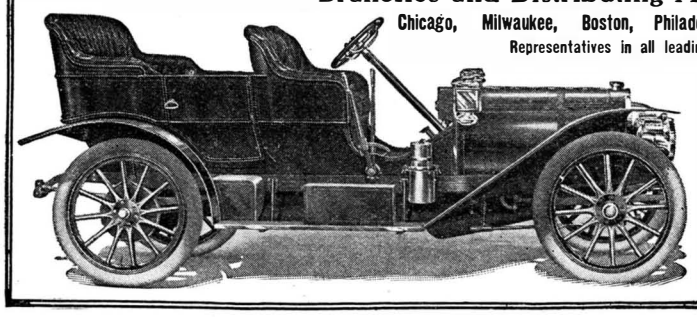

Model 34,
32 H-P,
Selective Transmission
Shaft Drive
$2,250



A Startling Discovery in Photography
The ISOSTIGMAR LENS
(Manufactured by R. & J. Beck under Letters Patent)
The Product of an Entirely New Idea. **3,000** Sold the First Three Months in London. Best of all Anastigmats. Increased Efficiency; Cost reduced 50 per cent. Comparison of Prices: Previous Anastigmats, 4x5, $45.00-$51.00. **Isostigmars, 4x5, $18.00-$28.00.** Isostigmars fit the Kodaks. Lenses sent on 10 days trial on receipt of price or through your dealer. Price lists of Isostigmars, Enlarging Outfits and Photoscripts for Titling Negatives, sent free.

REFLECTING LANTERN FOR OPAQUE OBJECTS
Will show on the screen Book Illustrations, Engravings, Post Cards and opaque objects, brilliantly illuminated in Natural Colors. Made in two styles. **The College Projector,** a large, powerful instrument for classroom and auditorium work. Now in use at Harvard, Cornell, University of Pennsylvania, Swarthmore, Leland Stanford, Girard College, etc., etc. **The Post Card Projector,** on same principle, but simpler and inexpensive, for showing post cards and other illustrations in Natural Colors. With the Post Card Projector a collection of cards becomes a constant source of instruction and amusement in the home, school or lodge. Send for lists of Projectors, Stereopticons and Moving Picture Machines. **Our Latest Clearance Lists of Microscopes, Stereopticons and X-Ray Apparatus sent free.**
WILLIAMS, BROWN & EARLE, Dept. 6, 918 Chestnut Street, Philadelphia, Pa.

The Machine that Makes the Money

$887.16 Earned in 11 Days

When the owner, with only one assistant, actually earned $887.16 in eleven days cleaning houses with one of our Portable House Cleaning Wagons and *we know and can prove to you that you or any other competent, energetic man can do as well or better,* don't you think it was time you were investigating the money-making possibilities of the house-cleaning business? Over 400 operators in as many towns in the United States are making from $3,000.00 to $5,000.00 a year net profit cleaning houses with our patented house-cleaning machines and not one failure has been recorded among them. Capital required, from $2,000.00 up. In every community where there are churches, hotels, schools, theatres, public buildings and residences there is work waiting for the owner of a portable house-cleaning wagon. Send for further information, descriptive matter, and letters from companies who are making money operating our machines. We are prosecuting infringers.

Gen'l Compressed Air and Vacuum Machinery Company
Largest Manufacturers in the World of Efficient Portable and Stationary Systems for Hotels, Office Buildings, Residences, etc.
4479 Olive Street, Dept. C, St. Louis, Mo.



The "SIMPLO" Automobile, $600
SOLID OR PNEUMATIC TIRES
The car that ***always*** gives satisfaction. Runs through bottomless mud and climbs all hills. Has 12 real horse power that is always ready for work. ***Low price, high quality.*** Will outlast any other car. If you want the ***best*** Automobile value, write for our illustrated booklet today.
COOK MOTOR VEHICLE CO., 1020 N. Broadway, St. Louis, U. S. A.

The Holsman Automobile

SIX YEARS OF SUCCESS — Rides Like a Carriage

1907 Sales Over $600,000.00
THE STANDARD of high-wheeled automobiles and the pioneer of this type. The only high-wheeled automobile manufactured that has a record in a public contest—and Holsman records date back to 1902. Every part of every machine guaranteed.
Repairs Average Under $3.00 per Month
High wheels allow solid rubber tires to be used without affecting riding qualities, and this insures "going the journey." A blacksmith or wagonmaker can make all ordinary repairs. Splendid hill-climbing power. Send for complete free illustrated catalogue.
The Oldest and Largest Manufacturers of Carriage Automobiles in the World
THE HOLSMAN AUTOMOBILE CO.
Room 463 Monadnock Block, Chicago, Ill., U.S.A.

COLD GALVANIZING.
AMERICAN PROCESS. NO ROYALTIES.
SAMPLES AND INFORMATION ON APPLICATION.



Established 1820.
NICKEL AND **Electro-Plating** Apparatus and Material
THE **Hanson & VanWinkle Co.,**
Newark, N. J.
28 & 30 S. Canal St. Chicago.



HIGH GRADE AIR GUNS, DARTS, SLUGS, STEEL TARGETS, 22-100 CAL. SAFETY RIFLES.



Manufactured by
H. M. QUACKENBUSH
Herkimer, N. Y.
SEND FOR CATALOGUE C

---

16 Ft. Steel Launch with 2H.P Engine complete $96

18-21-25 foot launches at proportionate prices. All launches fitted with two-cycle reversing engines with speed controlling lever; simplest engine made; starts without cranking, has only 3 moving parts. Steel rowboats, $20.00. All boats fitted with water-tight compartments; cannot sink, need no boat house. We are the largest manufacturers of pleasure boats in the world. Orders filled the day they are received. We sell direct to user, cutting out all middlemen's profits. Free catalogue.

MICHIGAN STEEL BOAT CO.
1332 Jefferson Ave., Detroit, Michigan



Proved Best BY Every Test

Mullins Fireproof Window

is absolutely fireproof and actually does what no other window can do—it stands every test.
Ask for an Estimate
or write for our convincing catalogue.
THE W. H. MULLINS CO.
203 Franklin Street, Salem, O.
We also make everything in architectural sheet metal work—statuary, skylights, wrought iron grilles, cornices, etc. 100-page catalogue of stock designs on request.